



FAMILY OF REMOTE  
USB HUBS



# ANYWHEREUSB PLUS

Connect USB peripheral devices anywhere on a Local Area Network (LAN) without a locally-attached host computer

IoT business automation requires communication with various IT assets and peripherals located across an enterprise. AnywhereUSB® Plus remote USB hubs give users the simplest and most direct connection options for existing equipment with a variety of USB 3.1 Gen 1 port options. All three models have Gigabit Ethernet support for failover redundancy and network bonding with SFP+ ports in the 8 and 24-port models for higher speeds or fiber networks.

AnywhereUSB 24 Plus is rack mountable with 24 USB 3.1 Gen 1 ports, while AnywhereUSB 8 Plus and AnywhereUSB 2 Plus are desktop or panel mountable units with eight or two ports, respectively, and support for Gigabit Ethernet.

AnywhereUSB can be coupled with Digi Remote Manager®, a web-based device configuration and security management platform, to help users reduce downtime. An intuitive user experience makes installation smooth and easy; with quick setup and configuration to monitor and maintain larger installations of remote Digi and third-party devices.

For enterprise and industrial customers who need remote or local USB ports and the higher speeds of USB 3.1 Gen 1 and Gigabit/10 Gigabit Ethernet, Digi AnywhereUSB Plus products give you an industry-leading connectivity solution.

## FEATURES AND BENEFITS

- Network-attached USB hubs easily connect USB peripheral devices to a PC from remote or virtual hosts
- Ideal for connecting USB devices over the network in virtualized environments such as VMware®
- AnywhereUSB 24 Plus is rack mountable with two power supplies and Ethernet connections for failover redundancy
- Access and monitor USB and serial devices over TCP/IP connection
- Supports multi-host connectivity for each USB port or group independently
- Supports Digi Remote Manager® cloud-based management platform to deploy, monitor and manage devices

## RELATED PRODUCTS



Digi® WR54



Digi ConnePort®  
TS



Digi 6310-DX




Accessories



Digi Remote  
Manager®

## APPLICATION EXAMPLE

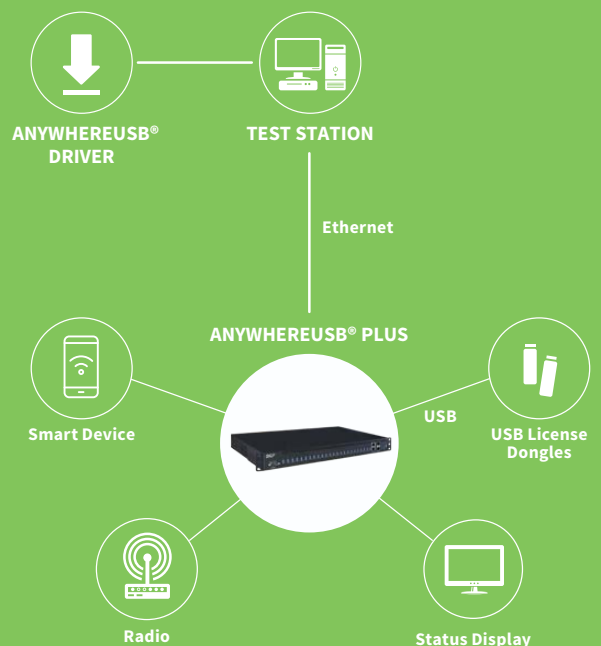


SPECIFICATIONS	ANYWHEREUSB 2 PLUS	ANYWHEREUSB 8 PLUS	ANYWHEREUSB 24 PLUS
<b>CELLULAR</b>			
<b>MODULE SUPPORT</b>	-	(1) Digi CORE modem compliant socket	(1) Digi CORE modem compliant socket
<b>SOFTWARE AND MANAGEMENT</b>			
<b>REMOTE MANAGEMENT</b>	Digi Remote Manager® (cloud based)		
<b>LOCAL MANAGEMENT</b>	WebUI (HTTP/HTTPS); CLI (SSH)	WebUI (HTTP/HTTPS); CLI (Console, SSH)	WebUI (HTTP/HTTPS); CLI (Console, SSH)
<b>OPERATING SYSTEMS</b>	Windows 7, Windows 8.1, Windows 10, Windows Server 2012 R2, Windows Server 2016, Windows Server 2019		
<b>PROTOCOLS</b>	Supports multi-host connectivity for each USB port or group independently		
<b>MEMORY</b>	512MB RAM, 4GB flash (eMMC)	2GB RAM, 4GB flash (eMMC)	2GB RAM, 4GB flash (eMMC)
<b>NETWORK</b>			
<b>ETHERNET</b>	(1) RJ-45; 10/100/1000 Mbps	(1) RJ-45; 10M/100M/1G/10G Ethernet	(2) RJ-45; 10M/100M/1G/10G Ethernet
<b>SFP+</b>	-	(1) SFP+ socket	(2) SFP+ sockets
<b>CONNECTORS</b>			
<b>CONSOLE</b>	-	(1) DB09M; RS-232 DTE	
<b>USB</b>	(2) USB 3.1 Gen 1 Type A	(8) USB 3.1 Gen 1 Type A	(24) USB 3.1 Gen 1 Type A
<b>PHYSICAL</b>			
<b>DIMENSIONS (L X W X H)</b>	118 mm x 74 mm x 30 mm (4.6 in x 2.9 in x 1.2 in)	260mm x 160 mm x 44.45 mm (10 in x 6 in x 1.75 in)	450.85 mm x 255 mm x 44.45 mm (17.75 in x 10 in x 1.75 in)
<b>WEIGHT</b>	0.38 kg (0.84 lb)	1.58 kg (3.48 lb)	4.7 kg (10.36 lb)
<b>STATUS LEDS</b>	(2) Ethernet, 2 (x1) USB, power	(2) Ethernet, (2) SFP+ 8 (x1 )USB, power, fan, user, (3) future Wi-Fi/WWAN	2 (x2) Ethernet, 2 (x2) SFP+, 24 (x1) USB, 2 (x1)PSU, 2 (x1) fan, user, (3) future Wi-Fi/WWAN
<b>POWER REQUIREMENTS</b>			
<b>POWER INPUT</b>	5 V, 5 A max	12 V DC, 12 A max	100-240 V 3 A max (2 supplies for redundancy)
<b>POWER CONSUMPTION</b>	25 watts max	98.5 watts max	157.7 watts max
<b>ENVIRONMENTAL</b>			
<b>OPERATING TEMPERATURE</b>	0 °C to 40 °C (32 °F to 104 °F)	0 °C to 55 °C (32 °F to 131 °F)	0 °C to 55 °C (32 °F to 131 °F)
<b>RELATIVE HUMIDITY</b>	5% to 95% (non-condensing)	5% to 95% (non-condensing)	5% to 95% (non-condensing)
<b>APPROVALS</b>			
<b>BLUETOOTH</b>	-	Bluetooth BLE 4.2	
<b>SAFETY</b>	UL 60950, CSA 22.2 No. 60950, EN60950, EN62368	UL/EN60950, UL/EN62368 and CSA 22.2	UL 60950, CSA 22.2 No. 60950, EN60950, EN62368
<b>EMISSIONS/IMMUNITY</b>	CE, FCC Part 15 Class B, AS/NZS CISPR 22, EN55024, EN55032	CE, FCC Part 15 Class B, AS/NZS CISPR 22, EN55024, EN55032	CE, FCC Part 15 Class B, AS/NZS CISPR 22, EN55024, EN55032
<b>WARRANTY</b>			
<b>PRODUCT WARRANTY</b>	5-year		


ENTERPRISE SOFTWARE	DESCRIPTION
<b>PROTOCOL SUPPORT</b>	HTTPS, FTP, SFTP, SSL, SMTP, SSH and CLI for web management; remote management via Digi Remote Manager
<b>SECURITY/VPN</b>	TLS 1.2, SSH, HTTPS
<b>ROUTING/FAILOVER</b>	Ethernet bonding (only for AnywhereUSB 24 Plus)
<b>OTHER PROTOCOLS</b>	DHCP

# PRODUCT IMAGES


ANYWHEREUSB 2 PLUS FRONT

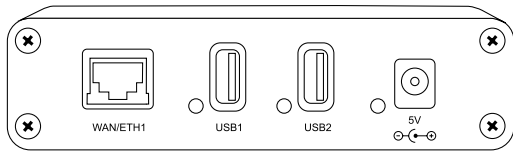


ANYWHEREUSB 2 PLUS BACK

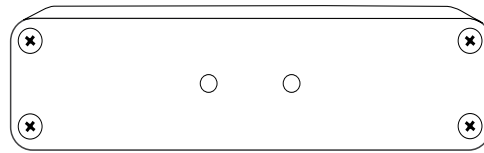


ANYWHEREUSB 8 PLUS FRONT

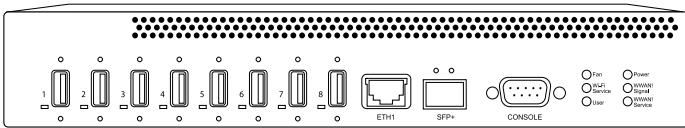


ANYWHEREUSB 8 PLUS BACK

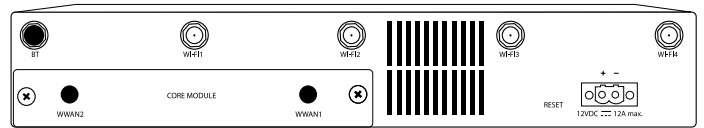

ANYWHEREUSB 24 PLUS FRONT



ANYWHEREUSB 24 PLUS BACK



PART NUMBERS	DESCRIPTION
<b>ANYWHEREUSB 2 PLUS MODEL</b>	
AW02-G300	AnywhereUSB 2 Plus; dual USB 3.1 Gen 1 ports, single 10M/100M/1G Ethernet, 5 VDC
<b>ANYWHEREUSB 8 PLUS MODEL</b>	
AW08-G300	AnywhereUSB 8 Plus; eight USB 3.1 Gen 1 ports, single 10M/100M/1G/10G Ethernet, single SFP+, 12 VDC
<b>ANYWHEREUSB 24 PLUS MODEL</b>	
AW24-G300	AnywhereUSB 24 Plus; 24 USB 3.1 Gen 1 ports, dual 10M/100M/1G/10G Ethernet, dual SFP+, dual power 100-240 VAC

ACCESSORIES	DESCRIPTION
76000965	AC power supply - extd temperature, universal plugs (US, EU, UK, AU) to 5 VDC - 2.5 mm locking barrel plug
76000682	Mounting bracket - DIN rail mounting kit

FOR MORE INFORMATION  
PLEASE VISIT [Digi.com](http://Digi.com)

DIGI SERVICE AND SUPPORT / You can purchase with confidence knowing that Digi is always available to serve you with expert technical support and our industry leading warranty. For detailed information visit [www.digi.com/support](http://www.digi.com/support).

© 1996-2019 Digi International Inc. All rights reserved.  
All trademarks are the property of their respective owners.

91004384  
A11/919

DIGI INTERNATIONAL WORLDWIDE HQ  
877-912-3444 / 952-912-3444 / [www.digi.com](http://www.digi.com)

DIGI INTERNATIONAL GERMANY  
+49-89-540-428-0

DIGI INTERNATIONAL JAPAN  
+81-3-5428-0261 / [www.digi-intl.co.jp](http://www.digi-intl.co.jp)

DIGI INTERNATIONAL SINGAPORE  
+65-6213-5380

DIGI INTERNATIONAL CHINA  
+86-21-50492199 / [www.digi.com.cn](http://www.digi.com.cn)



## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Networking Modules](#) category:*

*Click to view products by [Digi International](#) manufacturer:*

Other Similar products are found below :

[SE305-T](#) [509FX-SC](#) [SE308-T](#) [FCOPPER-SFP-100](#) [BNDL-MWF](#) [75060R-40](#) [301-2010-27](#) [DC-ES-4SB-EU](#) [MGM111E256V2](#)  
[LTP5901IPC-IPRB1C1#PBF](#) [LTP5901IPC-IPRC1C2#PBF](#) [LTP5901IPC-IPRC1C1#PBF](#) [LTP5901IPC-IPRB1C2#PBF](#) [LTP5901IPC-](#)  
[IPRA1C2#PBF](#) [112011-5033](#) [VSMD001V072](#) [65440R](#) [2000000844](#) [2000000849](#) [BB-WSW2C00015-1](#) [WISE-1020-0C01E](#) [WISE-1020-](#)  
[0S01E](#) [WISE-1021WR-1100E](#) [RAPID-NI-V2005](#) [RAPID-NI-V2007](#) [RAPID-NI-V2009](#) [RAPID-NI-V2011](#) [RAPID-NI-V2012](#) [RAPID-NI-](#)  
[V2105](#) [RAPID-NI-V2107](#) [RAPID-NI-V2108](#) [RAPID-NI-V2109](#) [RAPID-NI-V2112](#) [855-19619](#) [X2E-Z1C-W1-W](#) [X2E-Z4C-D2-A](#) [PuIM-](#)  
[1G4T-I211-BP-R10](#) [PuIM-1G4T-I211-R10](#) [PUZZLE-IN003B-C0/8G-R10](#) [XXV710DA2OCP2](#) [MO11AA003-01R](#) [WP20010NMK-01](#)  
[WP500100S-01](#) [XP1001000-05R](#) [XP1001000M-05R](#) [XP1002000-05R](#) [XP100200S-05R](#) [XPD1001000-01](#) [XPP100200S-02R](#) [112113-0001](#)