

DEVICE SERVER
MODULE



# **DIGI CONNECT ME**

Secure device server module with plug-and-play functionality and professional development tools for custom applications

The Digi Connect ME is a secure device server module that delivers complete and versatile embedded IPv6-ready network connectivity and strong standards-based encryption services such as SSL/SSH. Built on leading Digi 32-bit NET+ARM technology, the Digi Connect ME is cost effective and easy to use in existing and new product designs, while powerful enough to meet future product performance needs. The connector-style module is pin-compatible and interchangeable with the Digi Connect® Wi-ME, providing a direct migration path to a wireless solution without the traditional complexities of hardware and software integration work.

Digi Connect ME is available pre-loaded with Digi plug-andplay firmware, which eliminates software development efforts by providing powerful and configurable IPv4/IPv6 device server functionality, including an easy-to-use web user interface and security features. Target applications include retail systems, security/access control, medical devices and building/industrial automation.

### **BENEFITS**

- Compact and secure 32-bit device server modules
- Complete family of pin-compatible module solutions
- Integrated 10/100 Mbit Ethernet interface
- Strong enterprise-grade network security
- Highly integrated low emission design (FCC Class B)
- Extended and industrial operating temperature
- Digi processor and WLAN technology for true long-term availability


# DIGI CONNECT ME® RJ-45 W/Integrated Magnetics JTAG Connector PHY ARM JTAG UART ARM7TDMI 55 MHz Ext Bus Ctrlr GPIO 20-Pin CO-Pin




SPECIFICATIONS	Digi Connect ME®
HARDWARE	
PROCESSOR TYPE	32-bit Digi NS7520 processor
ARM CORE	ARM7TDMI
PROCESSOR SPEED	55 MHz
MEMORY BASE POPULATION	2/4 MB NOR flash
	8 MB SDRAM
PINS/FORM FACTOR	RJ-45 connector style with 20-pin micro pin header (Samtec FTS-110-01-F-DV-TR)
HIGH-SPEED TTL SERIAL INTERFACE	Up to 230 Kbps data rate; Full signal support for TXD, RXD, RTS, CTS, DTR, DSR and DCD; Hardware/Software flow control
GPIO	Up to 10 shared with 1 external IRQ
ON-MODULE POWER SUPERVISOR	Yes
JTAG INTERFACE	NET+OS development modules only
WAVE-SOLDERABLE DESIGN	No clean flux process
DIMENSIONS (L X W X H)	1.445 in (36.7 mm) x 0.75 in (19.05 mm) x 0.854 in (21.69 mm)
NETWORK INTERFACE - WIRED	
STANDARD	IEEE 802.3
PHYSICAL LAYER	10/100Base-T
DATA RATE	10/100 Mbps (auto-sensing)
MODE	Full- or half-duplex (auto-sensing)
CONNECTOR	RJ-45
INTEGRATED ETHERNET MAC/PHY	Yes
POE POWER PASS-THROUGH	Yes (see website for available options)
ENVIRONMENTAL	
OPERATING TEMPERATURE	-40° C to +85° C (-40° F to +185° F)
STORAGE TEMPERATURE	-50° C to +125° C (-58° F to +257° F)
RELATIVE HUMIDITY	5% to 90% (non-condensing)
POWER REQUIREMENTS (3.3V)	
MAXIMUM	270 mA (891 mW)
REGULATORY APPROVALS	
FCC PART 15 CLASS B, EN 55022 CLASS B	Yes
EN 61000-3-2 AND EN 61000-3-3	Yes
ICES-003 CLASS B, VCCI CLASS II, AS 3548	Yes
FCC PART 15 SUB C SECTION 15.247	Yes
IC RSS-210 ISSUE 5 SECTION 6.2.2(O)	Yes
EN 300 328, EN 301 489-17	Yes
UL 60950-1, EN 60950 (EU)	Yes
CSA C22.2, NO. 60950	Yes
EN 55024	Yes



Digi Connect ME® - Side



## **Recommended PCB Layout**

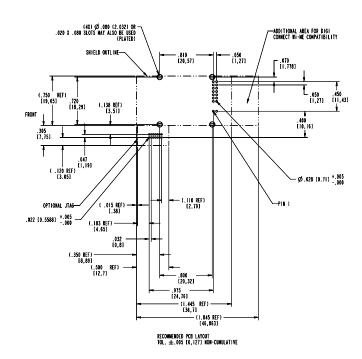



PART NUMBERS	DESCRIPTION	
MODULES FOR NET+OS		
DC-ME-01T-C	Digi Connect ME w/2 MB Flash, 8 MB RAM (single-unit pack)	
DC-ME-01T-PC	Digi Connect ME w/2 MB Flash, 8 MB RAM, 802.3af compliant power pass-thru (single-unit pack)	
DC-ME4-01T-C	Digi Connect ME w/4 MB Flash, 8 MB RAM (single-unit pack)	
MODULES WITH PLUG-AND-PLAY FIRMWARE		
DC-ME-01T-PS	Digi Connect ME w/2 MB Flash, 8 MB RAM, 802.3af compliant power pass-thru (single-unit pack)	
DC-ME-01T-S	Digi Connect ME w/2 MB Flash, 8 MB RAM (single-unit pack)	
DC-ME4-01T-S	Digi Connect ME w/4 MB Flash, 8 MB RAM (single-unit pack)	

**DIGI SERVICE AND SUPPORT** / You can purchase with confidence knowing that Digi is always available to serve you with expert technical support and our industry leading warranty. For detailed information visit www.digi.com/support.

@ 1996-2020 Digi International Inc. All rights reserved. All trademarks are the property of their respective owners.

DIGI INTERNATIONAL WORLDWIDE HQ 877-912-3444 / 952-912-3444 / www.digi.com

DIGI INTERNATIONAL GERMANY +49-89-540-428-0

DIGI INTERNATIONAL JAPAN +81-3-5428-0261 / www.digi-intl.co.jp DIGI INTERNATIONAL SINGAPORE +65-6213-5380

**DIGI INTERNATIONAL CHINA** +86-21-50492199 / www.digi.com.cn



## **X-ON Electronics**

Largest Supplier of Electrical and Electronic Components

Click to view similar products for WiFi Modules - 802.11 category:

Click to view products by Digi International manufacturer:

Other Similar products are found below:

KBPC10/15/2506WP WIFI-RT5392-SB-R10 SX-PCEAN2C-SP 849WM520100E WIFI-AT2350 7265.NGWG.SW HDG204-DN-3 FXX-3061-MIX EMIO-1533-00A2 PPC-WL-KIT02-R11 RC-CC2640-B HLK-7688A E70-433T14S WH-NB73-BA NF-02-PA EAR00364 3168.NGWG MY-WF003U AX210.NGWG.NV ESP-15F32Mbit ESP32-S32Mb TG-01M ESP-13 ESP-01F-2M ESP-01E-2M ESP-12S-8285-2M ESP-20 ESP32-SL ESP-12K-PSRAM ESP-12K ESP-12K-PSRAM-IPEX ESP-12H BW18 BW12-16Mb BW14 BW15 BW16 TG-12F SIM7600CE-L1S CB3S(tjrl) CB3S(hvk9) CB3S(qh6) WB2S(csyd) WB3S(ppty) WB3S(h238) WB3S(uvmz) 1005869 1012 QCA4004X-BL3B 32-2006-BU