



EXTENDED SAFETY
WIRELESS ENABLED
TERMINAL SERVER



DIGI CONNECT® WS

Extended safety terminal server is designed for serial over network applications that require 60601 certified solutions

Digi Connect WS is intended to be used with a data acquisition system to connect to RS-232 serial devices and send data from these serial devices to the data acquisition system without adjusting or manipulating the format. The extended safety terminal server complies with IEC 60601-1 3rd edition and can be used in environments requiring this level of testing, including being placed within the patient environment when used as part of a medical electrical (ME) system.

The Digi Connect WS provides serial over IP connectivity for the environment that connects RS-232 devices to an information system network. It is available in three models


with one, four, or eight RS-232 serial ports. Digi Connect WS supports 10/100 Ethernet and 802.11a/b/g/n compatible Wi-Fi.

Independent socket connectivity for each port gives system administrators a high level of control over networked serial devices.


BENEFITS

- 1/4/8-port RS-232 serial-to-network connectivity
- IEC 60601 3rd edition compliant
- Power over Ethernet support
- Wi-Fi Alliance Certified, WPA & WPA2 personal and enterprise, AES, TKIP, 802.11w, 802.11d, 802.11h, PMF
- VESA mountable
- TCP Socket Connectivity to individual devices
- HTTPS supported for additional security
- Ports may be connected to from different systems, OS independent

APPLICATION EXAMPLE

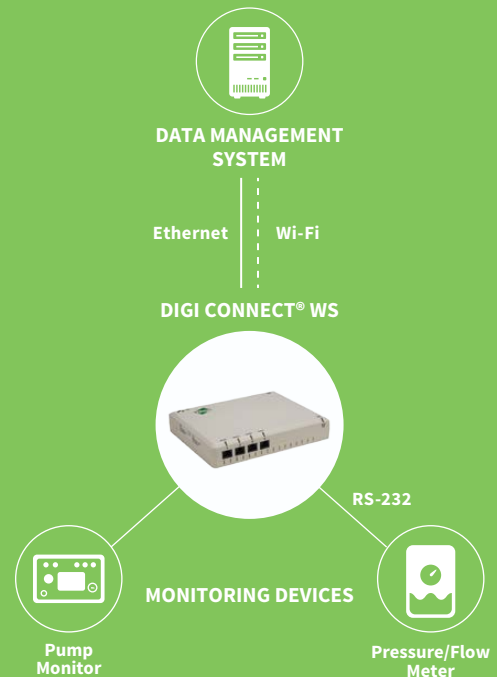

RELATED PRODUCTS



Accessories
and Cables



Enterprise
Support

SPECIFICATIONS

Digi Connect® WS

FEATURE	
MANAGEMENT	HTTPS, HTTP, SNMP, Optional management through Digi Remote Manager SM
PROTOCOLS	HTTP, HTTPS, TCP, SNMP
SECURITY	SSL, TLS
LEDS	Power, Ethernet, Serial, Wi-Fi, Find Me
DIMENSIONS (LENGTH X WIDTH X HEIGHT)	Approximately 200 mm x 160 mm x 40 mm (4 and 8 port), 140 mm x 120 mm x 40 mm (1 port)
WEIGHT	1 kg (4 and 8 port), 0.5 kg (1 port)
MOUNTING	VESA 75, Direct and Arm
INTERFACES	
SERIAL PORTS	1, 4, or 8 ports
SERIAL CONNECTOR	RJ-45 RS232
ETHERNET PORTS	1
ETHERNET PHYSICAL LAYER	10/100
WI-FI	802.11 a/b/g/n 2.4 and 5 g (can be disabled)
WI-FI MODES	Wi-Fi Alliance Cert, WPA & WPA2 personal and enterprise, AES, TKIP, PMF, 802.11d, 802.11h, 802.11w
POWER REQUIREMENTS	
POWER CONSUMPTION	WS 1: 0.1 A RMS MAX WS 4/8: 0.25 A RMS MAX
POWER INPUT	100-240 VAC IEC 60320 C8 Connector
POWER OVER ETHERNET	802.3af
POWER SUPPLY	60601-1 Class II
SURGE PROTECTION	Per IEC 61000-4-5: ±1 kV Per IEC 61000-4-4: ±2 kV for power supply lines (EFT)
ENVIRONMENTAL	
OPERATING TEMPERATURE	+10° C to +40° C
STORAGE TEMPERATURE	-20° C to +40° C
RELATIVE HUMIDITY	10% to 90% non-condensing
ALTITUDE	2000 meters
SERIAL PORT PROTECTION (ESD)	Per IEC 61000-4-2 ±6 kV contact; ±8 kV air
STANDARDS	
SAFETY	EN 60601-1: 2005 + corr.1 (2006) + corr.2 (2007) + A1 :2013, IEC 60601-1-2 Ed3 : 2007, IEC 60601-1-6: 2006 + A1: 2013
EMISSIONS	FCC 47 CFR Part 15 B and C, ICES-003, EN 301489-1, EN 301489-17, EN 300328, EN 62311 Wi-Fi/RF: EN 301 489-1 v1.9.2; EN 301 489-17 v2.1.1; EN 300 328 v1.8.1; EN 62311: 2008; RSS-210
IMMUNITY	EN55024, ICES-003

PART NUMBERS

DESCRIPTION

DC-WS-1-INT	Digi Connect WS, 1 RS232 serial port
DC-WS-4-INT	Digi Connect WS, 4 RS232 serial ports
DC-WS-8-INT	Digi Connect WS, 8 RS232 serial ports

DIGI SERVICE AND SUPPORT / You can purchase with confidence knowing that Digi is always available to serve you with expert technical support and our industry leading warranty. For detailed information visit www.digi.com/support.

© 1996-2017 Digi International Inc. All rights reserved.
All trademarks are the property of their respective owners.

91003099
A3/717

DIGI INTERNATIONAL WORLDWIDE HQ
877-912-3444 / 952-912-3444 / www.digi.com

DIGI INTERNATIONAL GERMANY
+49-89-540-428-0

DIGI INTERNATIONAL JAPAN
+81-3-5428-0261 / www.digi-intl.co.jp

DIGI INTERNATIONAL SINGAPORE
+65-6213-5380

DIGI INTERNATIONAL CHINA
+86-21-50492199 / www.digi.com.cn



X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Servers](#) category:

Click to view products by [Digi International](#) manufacturer:

Other Similar products are found below :

[70002259](#) [70002261](#) [VESR321-ML](#) [NBLM-LM1CR](#) [EKI-1528TI-VDC-CE](#) [ADAM-4570L-DE](#) [ADAM-4571-CE](#) [XPC100200S-01](#) [ESP904](#)
[96NIC-10G2P-IN](#) [ADAM-4570-CE](#) [ADAM-4571L-DE](#) [AGS-913I-R11A1E](#) [EKI-1361-MB-BE](#) [EKI-1362-BE](#) [EKI-1362-MB-BE](#) [EKI-1522-](#)
[CE](#) [EKI-1524I-CE](#) [EKI-1526-CE](#) [EKI-1526I-CE](#) [ABDN-ER-IN5018](#) [ESP901](#) [ESP902](#) [ESR901](#) [ESR904](#) [BB-VESR902T](#) [VESR902D](#)
[70002412](#) [70002263](#) [70002265](#) [70002269](#) [70002271](#) [70002277](#) [70002279](#) [70002281](#) [70002285](#) [70002324](#) [70002404](#) [70002406](#) [70002410](#)
[70002414](#) [70002418](#) [ED1100002-01](#) [ED2100002-01](#) [ED41000P0-01](#) [ED41000P2-01](#) [PEN100100A-01-IT](#) [PXC2102G2-01](#) [SD2101002-11](#)
[UD1100002-01](#)