



DUAL CELLULAR / DUAL WI-FI  
5G-READY PLATFORM



Manage this device with  
Digi Remote Manager

# DIGI TX64

High performance cellular router with dual redundant communications for complex transit and transportation systems

Ideal for challenging transportation and mobile environments, Digi TX64 is a dual cellular LTE-Advanced and LTE-Advanced Pro router with true enterprise class routing, security, firewall and integrated VPN. It offers a flexible interface design with an integrated Wi-Fi access point, USB, serial and 4-port Ethernet switch, as well as a variety of configuration options including GNSS and Bluetooth®.

Internet access for riders is managed securely and without impact to onboard bus systems. Triple carrier aggregation on each cellular interface can be combined to deliver up to 1.2 Gbps to passengers. Onboard systems retain priority and any remaining bandwidth is made available to Internet traffic.

A captive portal and splash page enable term acceptance, targeted messaging and agency branding. Standard HTTP/DNS redirect can be used to block malware and unwanted content through popular third-party service providers or an agency server.

Reliable power circuitry supports 9-36 VDC input with ignition sense for direct integration into the vehicle's power source. Dual cellular and dual Wi-Fi modules provide true segmented traffic flow of private and public data for fare collection, CAD/AVL data, camera log backhaul and passenger Wi-Fi access.


## FEATURES AND BENEFITS

- 5G-ready platform: future-built with powerful quad-core processor
- Segmented private and public data communication across dual 1.2 Gbps LTE-Advanced Pro Cat 18 or LTE-Advanced Cat 11 cellular modules
- Wired Gigabit Ethernet (4-port) for onboard systems
- Video and vehicle data offload over 1.7 Gbps 802.11ac Wi-Fi backhaul
- Passenger Wi-Fi over 867 Mbps 802.11ac access point
- Securely deploy, monitor and control devices with Digi Remote Manager®

## RELATED PRODUCTS



## APPLICATION EXAMPLE

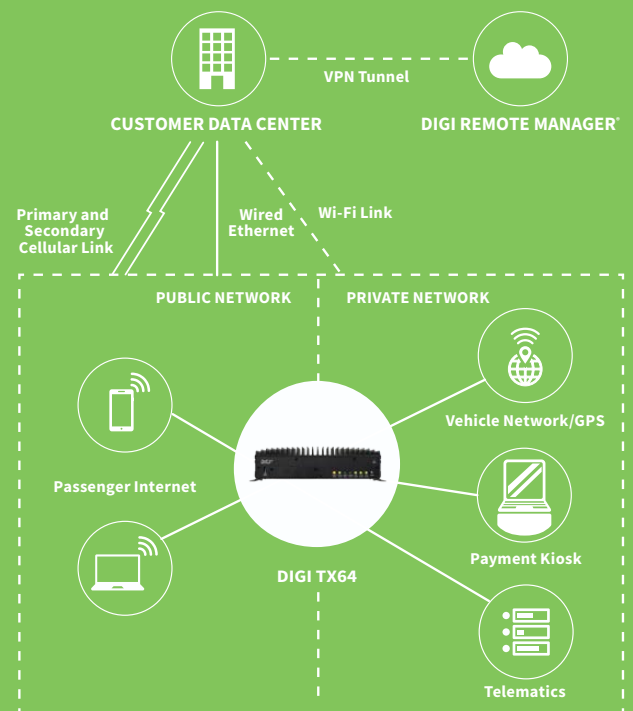

## SPECIFICATIONS

## DIGI TX64

## WIRELESS INTERFACES

## WWAN\*

DUAL MODULES  
LTE-ADVANCED WORLDWIDE

LTE FDD: B1 (2100), B2 (1900), B3 (1800), B4 (1700AWS), B5 (850), B7 (2600), B8 (900), B12 (700ac), B13 (700c), B17 (700), B20 (800DD), B25 (1900), B26 (850), B28 (700 APAC), B29 (700), B30 (2300), B66 (1700AWS); LTE TDD: B38 (2600), B40 (2300), B41 (2500); 3G (HSPA): B1 (2100), B2 (1900), B3 (1800), B4 (1700AWS), B5 (850), B8 (900); Transfer rate (max): 600 Mbps down, 75 Mbps up per module (Cat 11)

DUAL MODULES  
LTE-ADVANCED PRO WORLDWIDE

LTE FDD: B1 (2100), B3 (1800), B7 (2600), B8 (900), B12 (700ac), B13 (700c), B14 (700PS), B20 (800DD), B25 (1900); B26 (US 850 Ext), B28 (700 APAC), B29 (US 700de Lower); B30 (2300 WCS), B32 (1500), B48 (3600), B66 (AWS-3), B71 (600); LTE TDD: B38 (2600), B39 (1900), B40 (2300), B41 (2500), B42 (3500), B43 (3600), B46 (5200); Transfer rate (max): 1.2 Gbps down, 150 Mbps up per module (Cat 18)

## CONNECTOR

2 or 4 x 50 Ω SMA per module (center pin: female)

## SIM SLOTS

2 mini-SIM (2FF) per module (4 total)

## SIM SECURITY

SIM slot cover plate included

## WI-FI

## DUAL MODULES

Private backhaul: 4 x 4 MU-MIMO 5 GHz 802.11 a/n/ac Wave 2, 1.733 Gbps (max)  
Public Wi-Fi: 2 x 2 MIMO 2.4/5 GHz 802.11 a/b/g/n/ac, 867 Mbps (max)

## HOTSPOT

Captive portal, customizable splash page

## AUTHENTICATION

Basic ToS acceptance, Enterprise RADIUS

## 3RD PARTY SERVICES

Content filtering, embedded advertising

## MODES

Up to 4 access points and 1 client per Wi-Fi module (8+2 total)

## SECURITY

WPA/WPA2-Personal, WPA/WPA2-Enterprise

## CONNECTORS

Private backhaul: 4 x 50 Ω RP-SMA (center pin: male)  
Public Wi-Fi: 2 x 50 Ω RP-SMA (center pin: male)

## GPS

## TECHNOLOGY

Multi-constellation: concurrent reception of up to 2 GNSS (GPS, Galileo, GLONASS, BeiDou)

## SENSITIVITY

-163 dB

## PROTOCOL

NMEA 0183 V2.3 sentence output

## CONNECTOR

1 x 50 Ω SMA (center pin: female); +3.3 VDC active antenna drive

## HARDWARE

## SERIAL

## PORTS / CONNECTOR

1 RS-232; DB-9 male

## ETHERNET

## PORTS / CONNECTOR

4; RJ-45

## STANDARD

IEEE 802.3; 10/100/1000 Base-T

## USB

## PORTS

3

## STANDARD

USB 3.0, Type A

## MEMORY

## RAM

2 GB

## FLASH

8 GB (CFAST card)

## PHYSICAL

## DIMENSIONS

260 mm x 196 mm x 67 mm (10.2 in x 7.8 in x 2.6 in)

## WEIGHT

3.3 kg (7.25 lbs)

## STATUS LEDS

Power, WWAN (signal, service) per module, Wi-Fi service (per module), GNSS service, LAN (link, activity)

## ENCLOSURE

IP40 aluminum alloy

## POWER

## POWER INPUT

9 - 36 VDC, 60 W minimum power source required

## POWER CONSUMPTION

28 W typical (idle); 41 W (peak RF Tx/Rx)

## ENVIRONMENTAL

## MOUNTING

Flexible mounting options

## OPERATING TEMPERATURE

-30° C to 70° C (-22° F to 158° F)

## STORAGE TEMPERATURE

-40° C to 85° C (-40° F to 185° F)

## RELATIVE HUMIDITY

0% to 95% (non-condensing) @ 25° C (77° F)

\*Transfer rates are network operator dependent

SPECIFICATIONS		DIGI TX64
APPROVALS		
CELLULAR	PTCRB, AT&T, Verizon	
SAFETY	UL 60950/EN62368, CSA 22.2 No. 60950	
EMISSIONS/IMMUNITY	CE, FCC Part 15 Class B, EN55024, EN55032 Class B, EN301489-1/-17	
INDUSTRY	MIL-STD 810G (temperature, humidity, vibration, shock, dust) Vehicle-grade certifications: E-Mark (E13), SAE J1113-2 / J1455, ISO 7637-2/3, ISO 10605, ISO 16750-2 load dump	
WARRANTY		
PRODUCT WARRANTY	3-year	

ENTERPRISE SOFTWARE	DESCRIPTION
PROTOCOL SUPPORT	HTTP, HTTPS, FTP client, SSL, TLS v1.2, SCP (client and server), SFTP, SMTP client for use by scripts and the command line, SNMP (v2/v3), SSH; remote management via Digi Remote Manager®; Protocol analyzer, ability to capture PCAP for use with Wireshark; DynDNS; Dynamic DNS client compatible with BIND9/No-IP/DynDNS; Captive portal, Intelliflow; X.509 certificate management; Dead Reckoning
SECURITY	IP filtering, stateful firewall, custom firewall rules (iptables), address and port translation; SSL, SSLv2, SSLv3; Authentication: RADIUS, TACACS+; certificates; MAC address filtering; VLAN support
VPN	IPSec with IKEv1, IKEv2, NAT Traversal; OpenVPN client and server; GRE VPN tunnels; Cryptology: SHA-1/256/384/512, MD5, RSA; Encryption: 3DES and AES up to 256-bit (CBC mode for IPsec); Diffie Hellman: DH groups 1-32 (CURVE448)
ROUTING/FAILOVER	IP pass-through; NAT, NAPT with IP port forwarding; Ethernet bridging; GRE; Multicast routing; Routing protocols: RIP (v1, v2) OSPF, BGP; IP failover: VRRP; automatic failover, Digi SureLink®
OTHER PROTOCOLS	DHCP; Dynamic DNS client compatible with No-IP/DynDNS; Nagios, DNS server, NTP server, Multicast, mDNS, IPerf
LOCAL MANAGEMENT	Web interface (HTTP/HTTPS); CLI (SSH, serial port)
MANAGEMENT / TROUBLESHOOTING PROTOCOLS	Protocol analyzer with PCAP for Wireshark, event and system logging (with Syslog), accessible from Digi Remote Manager, SFTP or SCP
PROGRAMMING TOOLS / ENVIRONMENTS	Python v3.6.4

## PRODUCT IMAGES

FRONT



BACK



# DIGI REMOTE MANAGER®



## CAPABILITIES

- Centralized management of remote devices over 3G/4G/LTE
- Define standard configurations and automatically monitor individual devices for PCI security compliance
- Get alerts and create reports on performance statistics, including connection history, signal quality, latency, data usage and packet loss
- No servers or applications to operate and maintain
- Complete tasks for your entire device network in minutes
- Edit configurations and update firmware for individual devices or groups
- Monitor the status and location of remote devices via a web browser
- Activate or deactivate cellular lines and monitor data to ensure you never incur overage charges

## INFRASTRUCTURE

- Hosted in a commercial-grade SAS 70-certified environment
- Superior availability, operating to 99.9% or greater
- Open APIs available to support application development

## SECURITY

- Certified SSAE-16 facilities
- Over 175 security controls in place to protect your data
- Enables compliance with security frameworks like PCI, HIPAA, NIST
- Earned SkyHigh's Cloud Trust Program highest rating of Enterprise-Ready

PART NUMBERS	DESCRIPTION
TX64-A121	Digi TX64 - dual LTE-Advanced Cat 11, dual Wi-Fi, worldwide
TX64-A141	Digi TX64 - dual LTE-Advanced Pro Cat 18, dual Wi-Fi, worldwide

PART NUMBERS	ACCESSORIES*
76002076	AC power supply - 12 VDC - 3-pin power connector
76002069	Digi TX64-A121 accessory kit
76002087	Digi TX64-A141 accessory kit
76000826	Cable - Ethernet, RJ-45 to RJ-45, 2 m

\*Sold separately, unless otherwise noted.

FOR MORE INFORMATION  
PLEASE VISIT [DIGI.COM](http://DIGI.COM)

**DIGI SERVICE AND SUPPORT** / You can purchase with confidence knowing that Digi is always available to serve you with expert technical support and our industry leading warranty. For detailed information visit [www.digi.com/support](http://www.digi.com/support).

© 1996-2020 Digi International Inc. All rights reserved.  
All trademarks are the property of their respective owners.

91004416  
B1/420

**DIGI INTERNATIONAL WORLDWIDE HQ**  
877-912-3444 / 952-912-3444 / [www.digi.com](http://www.digi.com)

**DIGI INTERNATIONAL GERMANY**  
+49-89-540-428-0

**DIGI INTERNATIONAL JAPAN**  
+81-3-5428-0261 / [www.digi-intl.co.jp](http://www.digi-intl.co.jp)

**DIGI INTERNATIONAL SINGAPORE**  
+65-6213-5380

**DIGI INTERNATIONAL CHINA**  
+86-21-50492199 / [www.digi.com.cn](http://www.digi.com.cn)



## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Routers category](#):*

*Click to view products by [Digi International manufacturer](#):*

Other Similar products are found below :

[LR54-AA401](#) [WR44-L900-AE1-RF](#) [WR31-U92A-DE1-TB](#) [SR30500020-SWH](#) [SR30510120](#) [SR30508010](#) [SR30500410](#) [UR2B612011](#)  
[UR2L610011-SWH](#) [UR2L610710](#) [BB-ERT311](#) [BB-UR2B610011](#) [BB-UR2B610021](#) [SL30210110-SWH](#) [SL30210110-XSWH](#) [SR30010110-](#)  
[SWH](#) [SR30510420-SWH](#) [SR30500420-SWH](#) [SR30518120-SWH](#) [XR2F000711](#) [ASB-631R-DX06-OUS](#) [TX64-A121](#) [X2E-Z1R-E1-W](#) [X2E-](#)  
[Z1R-W1-W](#) [X2E-Z1R-E1-A](#) [E224HPL2S](#) [1153078](#) [1153079](#) [2702529](#) [RUT24006E000](#) [RUT950U022C0](#) [RUTX09000000](#) [RUTX11000000](#)  
[FS-BENG-C](#) [FS-Router-BAC2](#) [IX14-M601](#) [RUT300000000](#) [RUT360000000](#) [RUT950V022C0](#) [RUT950K02400](#) [RUT950U025A0](#)  
[RUT955M036V0](#) [RUT955T033B0](#) [RUT955J034S0](#) [RUT955M03690](#) [RUT955T03530](#) [RUTX12000000](#) [WR11-C100-DE1-SU](#) [WR21-L82B-](#)  
[DE1-SU](#) [WLNN-ER-DP551](#)