


UL1007 22-24AWG 颜色：黑、紅 各一PCS。
 一端打（杜邦2.54）端子，另一端紅色鍍100Ω電阻再打端子。

ELECTRICAL PROPERTIES:

1. 100% OPEN SHORT MIS-WIRE TEST
2. Conduction Resistance: 2 ohm max
3. Insulation resistance: 5Mega ohm MIN
4. Hi-Pot: 300V DC/10ms

Pin Assignment

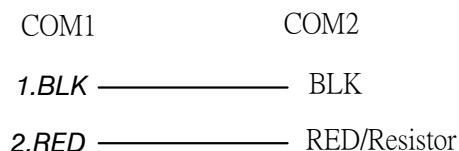

NO.	DESCRIPTION	Q'TY	UNITS
5	TUBE: 4Φ 55mm X 2	2	pcs
4	Resistor:100Ω 1/4W ± 1%	1	PCS
3	HOUSING:DP 2.54mm-1PIN+2.54mm Terminals	1	SET
2	HOUSING:DP 2.54mm-2PIN+2.54mm Terminals	1	SET
1	WIRW:UL1007 24# RED & BLK	1	pcs

Tolerance: X. ± .X ± .XX ± .XXX ± X' ± .X' ±	Approved by: WXR	 SMOOTH CABLE & CONNECTOR CO., LTD.
	Checked by:	
	Drawn by: CDJ	
	Date: 2016.08.26	
	Scale: Unit: None m/m	
Specification Use Only		customer p/n: Resistor/2.54
		Smooth p/n:
		Description:
		DWG NO:
		SHEET: 1/1
		REV: A

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Test Probes](#) category:

Click to view products by [Digilent](#) manufacturer:

Other Similar products are found below :

[6214](#) [6474](#) [815003](#) [923832-BK-B](#) [P-KIT-1](#) [KT-MS001](#) [925250-R](#) [973368101](#) [972318101](#) [972318100](#) [MXHQ87WJ3000](#) [PK106-3](#) [PK2-5MM-102](#) [TAS90](#) [VL1735/45](#) [973368100](#) [972327100](#) [972327101](#) [973995100](#) [973995101](#) [CT3982B-120](#) [MO50-PINS](#) [CT4386](#) [PP023-1](#) [PK1-5MM-127](#) [PP026-1](#) [PK103](#) [PK-ZS-013](#) [P6139B-PK10](#) [PQ215](#) [PQ218](#) [RT-ZI10C](#) [TT-SI 8071](#) [TT-SI 8050](#) [TT-SI 8010A](#) [TT-SI 7005](#) [GE.3421](#) [GE.2521](#) [GE.3121](#) [GE.1511](#) [GE.1521](#) [GE.2511](#) [GE.4511](#) [HVP15B](#) [TT-SI7002](#) [4005](#) [4011](#) [4012](#) [4013](#) [4014](#)