


Kit 60109-3 OSD KIT



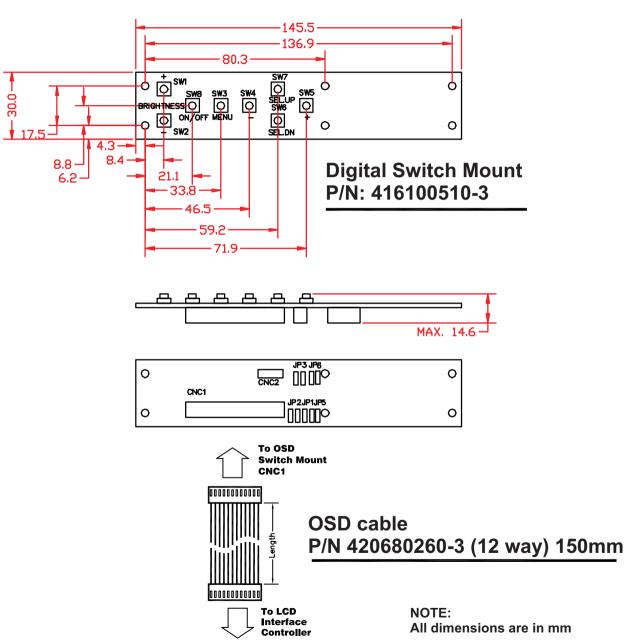

CNC1 Pin Assignment Connector : JST XHD12		
pin #	description	
12	no connection	
11	OSD Select UP	
10	OSD Select Down	
9	OSD Plus/Right	
8	OSD Minus/Left	
7	OSD Menu	
6	Ground	
5	Backlight Brightness	
	VR pin B	
4	Backlight Brightness	
	VR pin WIP	
3	Backlight Brightness	
	VR pin A	
2	Power Switch B	
1	Power Switch A	

CNC2 Pin assignment Connector : Hirose DF13-9F		
pin #	description	
9	Ground	
8	Adjust Down/Decrease/Left	
7	Adjust Up/Increase/Right	
6	Select Down	
5	Select Up	
4	Ground	
3	No connection	
2	No connection	
1	Power On/Off	

Jumper setting:

JP1: SWAP DEC/INC SWITCH 1-2,3-4 closed : NORMAL 1-3,2-4 closed : SWAPPED

JP2 : SWAP SEL UP/DN SWITCH

1-2,3-4 closed : NORMAL 1-3,2-4 closed : SWAPPED

JP3: SWAP BRIGHTNESS INC/DEC SWITCH

1-2,3-4 closed : NORMAL 1-3,2-4 closed : SWAPPED

JP5 : 1-2 closed : Disable On/Off power button control Open : Enable On/Off power button control(Default)

Date: 22 DEC 2006

JP6 : 1-2 closed : Default power on (JP5 set open) 3-4 closed: Defalt power off (JP5 set open)

Kit 60109-3 includes :

- 1) Digital OSD switch mount P/N 416100510-3
- 2) OSD cable,150mm P/N 420680260-3

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for Specialised Cables category:

Click to view products by Digital View manufacturer:

Other Similar products are found below:

603PT6 603SS6L 604PT6 604SS6 706000D02F200 910640 96CB-L2020PIB2 1200740077 1200740114 AC172 ACL-SSI-4

R88ACAKA0015SRE R88ACAWL005SDE R88ACRGD0R3C 1300150047 1300660036 1302262116 1300150149 1300220020

1300220104 1300220119 1301240492 1301810221 1365323-1 176P12 1971465-2 20240400003 20240400013 2085828-1 20886510030

2-22733-8 22733-8 CB-5PSBC-RS CB-704EC-RS CB-BATACC-RS CB-JST3PSW-RS CB-M12COM-R10 25AC84 25AK84X 25AU25

25FN82 AC118 ACL-HHS-1M(CAT5E) SSL009PC2DC012N FC2A-KC6C 2085828-2 20886510150 CCS-FCB-5 CCSFCBF2 R88A-CRWB020N