



The IP-50 provides easy and direct connection to products using networks and the Internet.

The IP-50 come with a standard Ethernet connection, RS-232 interface and on-board fully programmable and customizable web server. It can be used to control and monitor any RS-232 device remotely.

Users can design and setup their own user interface and functionality or access the expanding portfolio of standard product packages from www.digitalview.com/ip-50 website.

Applications include:

- ✓ Digital Signage installations
- ✓ Industrial systems monitoring and control
- ✓ Environmental monitoring
- ✓ Control and monitoring of Digital View products

SPECIFICATION

Network Interface

Ethernet 10BaseT
RJ-45 connector x 1
Supported protocols: IP, TCP, DHCP

RS-232 Interface

DB9-Female connector x 1
Serial baud rate: 2400
Data bits: 8
Parity : none
Stop bits: 1
RS-232: TxD, RxD

Power

Power input : 7.5V DC
Power consumption : 200mA @7.5V

Environmental


Operating temperature : 0°C to 50°C
Relative humidity : 5%-95% relative humidity
(Non-condensing)

Dimension

Dimension (W x D x H) : 86mm x 69mm x 24.5mm

Weight

Weight (net) : 130g

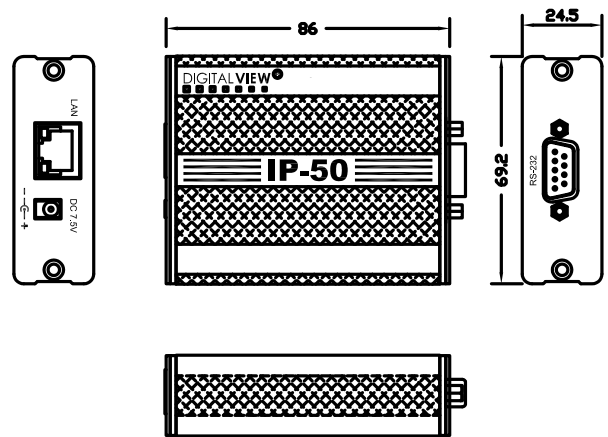

Brand names belong to their respective owners. Specifications subject to change without notice. August 2007

ASIA

Digital View Ltd.
19th floor Tai Tung Building
8 Fleming Road
Wanchai, Hong Kong

Tel: (852) 2861 3615
Fax: (852) 2520 2987
Email: sales@digitalview.com

USA

Digital View Inc.
18440 Technology Drive
Building 130
Morgan Hill, CA 95037
USA

Tel: (1) 408-782-7773
Fax: (1) 408-782-7883
Email: sales@digitalview.com

EUROPE

Digital View Ltd.
6 Marylebone Passage,
London, W1W 8EX,
UK

Tel: +44 20-7631-2150
Fax: +44 20-7631-2156
Email: sales@digitalview.com

Please visit our web site for more information: www.digitalview.com

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Computer Cables](#) category:

Click to view products by [Digital View](#) manufacturer:

Other Similar products are found below :

[68809-0004](#) [IB63](#) [CB-716EB-RS](#) [CB-716P8P9-RS](#) [CBK-11-290K-00](#) [ACL-10550](#) [ACL-10568-2](#) [ACL-10568-5](#) [427522400-3](#) [32102-021500-200-RS](#) [426091300-3](#) [48000023](#) [10114976-P015002LF](#) [88761-6101](#) [NT631C-CN321-EU](#) [ACL-10568NF-1](#) [MIKROE-2092](#) [PCL-101100R-2E](#) [1700009405](#) [PS/2 Cable](#) [NT31C-CN323-EU](#) [FWAX-PK1-51](#) [68801-1905](#) [111068-1015](#) [100436-1107](#) [68801-0630](#) [68801-3612](#) [68801-3618](#) [205058-1002](#) [PS2NK](#) [SATA cable](#) [96021-0000-00-0](#) [FAK-SMZSMZ 5M](#) [FAK-SMZSMZ-3M](#) [ACC-500-200-R](#) [iW-C40-PCIe08-C1](#) [1700001531](#) [96048-0000-00-0](#) [SATA III cable 30cm, down/straight](#) [cab-Pico-ITX-LVDS](#) [PCL-101100SB-2E](#) [AXXSTCBLQAT](#) [NT31C-KBA05](#) [PCL-101100M-2E](#) [A2U4PSWCXCXK1](#) [2 port SATA to 5 pin,L=200mm](#) [ACL-10568NF-2](#) [C-PS2WG/5](#) [C-PS2WW/2](#) [C-PS2WW/3](#)