




Twisted Pair Installation Cable - Category 6 Class E - F/UTP

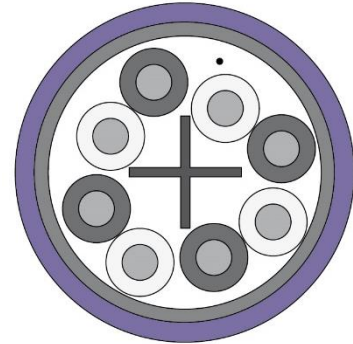

Abstract

CAT 6 Class E, F/UTP, Twisted Pair Installation Cable, 250 MHz

Application areas

Primary (Campus), Secondary (Riser), Tertiary (Horizontally)
IEEE 802.3: 10Base-T; 100Base-T; 1000Base-T; 2.5GBase-T;
5GBase-T
IEEE 802.5: 16 MB; ISDN; FDDI; ATM; PoE/PoE+

Certification

ETL Type Approval (101152681CRT-001c)

Standards

ISO/IEC 11801 3rd Ed.; IEC 61156-5
EN 50173-1/4; EN 50288-5-1

Physical Properties

Conductor	Bare annealed copper, solid AWG 23/1
Insulation	HD-PE (High Density Polyethylene)
Total number of insulated conductors	8, twisted in 4 pairs
Color code	Blue-white, orange-white, green-white, brown-white
Individual pair shielding	None
Overall shielding	Aluminum foil, providing 100% coverage, with drain wire
Outer sheath	E _{CA} to B _{2CA} acc. to EN 50575; LSZH
Outer sheath diameter (nominal)	0.5 mm (E _{CA}); 0.6 mm (D _{CA}); 0.8 mm (C _{CA}); 0.8 mm (B _{2CA})
Outer sheath color	Purple

Mechanical Properties

Tensile loading	150 N max.
Dynamic bending radius	8x AD mm min.
Static bending radius	4x AD mm min.
Shipping- and storage temperature range	-20 °C up to +60 °C
Operating temperature range	-20 °C up to +75 °C
Installations temperature range	0 °C up to +50 °C
Overall diameter Simplex (nominal)	7.0 (E _{CA}); 7.2 mm (D _{CA}); 7.6 mm (C _{CA}); 7.6 mm (B _{2CA})
Weight (kg/km)	46 kg (E _{CA}); 47 kg (D _{CA}); 48.5 kg (C _{CA}); 48.5 kg (B _{2CA})



Electrical Properties

Impedance	100 ± 5 Ohm @ 1-250 MHz
Capacitance	45 pF/m nominal @ 800 Hz
Capacitance unbalance (pair-ground)	1.5 pF/m max. @ 1 KHz
Insulation resistance	5 GOhm x km min.
DC resistance	72 Ohm/km max. (2% max. resistance unbalance)
DC loop resistance	147 Ohm/km max. (2% max. resistance unbalance)
Voltage resistance	72 Vdc max.
Coupling attenuation	CA-Type 3
Signal propagation delay	535 nS/100 m max.
Propagation delay	20 nS/100 m max.
Separating class	„c“ acc. to EN-50174-2
NVP	69%

Product Number Information

Item code	Length/Packaging	Reaction to fire acc. to EN 50575	DoP number
DK-1623-VH-1	100 m box, simplex	E _{CA}	DoP_1000_051
DK-1623-VH-305	305 m drum, simplex		
DK-1623-VH-5	500 m drum, simplex		
DK-1624-VH-1	100 m box, simplex	D _{CA}	DoP_1000_054
DK-1624-VH-305	305 m drum, simplex		
DK-1624-VH-5	500 m drum, simplex		
DK-1625-VH-1	100 m box, simplex	C _{CA}	DoP_1000_072
DK-1625-VH-305	305 m drum, simplex		
DK-1625-VH-5	500 m drum, simplex		
DK-1626-VH-1	100 m box, simplex	B2 _{CA}	DoP_1000_035
DK-1626-VH-305	305 m drum, simplex		
DK-1626-VH-5	500 m drum, simplex		

Transmission Properties

FREQ.	ATT	NEXT	PS-NEXT	ACR	PS-ACR	EL-FEXT	PS-ELFEXT	RL
MHz	dB	dB	dB	dB	Db	dB	dB	dB
1	2,1	74.3	71.3	72.2	69.2	68	65	26
10	5,9	59.3	56.3	53.4	50.4	48	45	25
100	19,1	44.3	41.3	25.2	22.2	28	25	20.1
250	31.1	38.3	35.3	7.2	4.2	20	17	17.3

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Ethernet Cables / Networking Cables](#) category:

Click to view products by [Digitus](#) manufacturer:

Other Similar products are found below :

[73-6670-7](#) [73-6680-15](#) [73-7797-25](#) [MCJB2-10P6Q7-120](#) [84909-0204](#) [1200700174](#) [1200860368](#) [1410147](#) [E16A06002M030](#) [E200102-009-S1](#) [AX105346-EW](#) [MT14-187L](#) [17-103530](#) [ERWPAB3002M005](#) [190-038045-01](#) [NK5EPC18RDY](#) [NK5EPC18VLY](#) [NK5EPC18YLY](#) [NK5EPC1GRY](#) [NK5EPC4Y](#) [NK5EPC6YLY](#) [NK5EPC8BLY](#) [NK5EPC9YLY](#) [1969343-6](#) [C501100010](#) [C501106002](#) [C501106007](#) [C501106015](#) [C501106025](#) [C601102010](#) [C601104010](#) [C601106007](#) [C601106015](#) [2142758-2](#) [2168427-2](#) [CAT1106007](#) [21949-1](#) [2J1866A](#) [RJF SFTP 5E 0500](#) [AX100351](#) [MN14CEC/ST](#) [C501100015](#) [C501106004](#) [C501106010](#) [C5F1108007](#) [C601104004](#) [C601106004](#) [CA21106004](#) [CA21106010](#) [CA21109007](#)