

DIGITUS KVM Switch, 2-Port, 4K60Hz, 2 x DP in, 1 x DP/HDMI out

DS-12850
EAN 4016032466833



KVM Switch, 2x1 DP, DP/HDMI Out, USB 4Kx2K@60Hz

With the DIGITUS® 2-Port KVM Switch, you can operate two 4k-compatible PCs using a single USB keyboard and mouse. By pressing a button or using the remote control included in delivery, you can switch comfortably between the two PCs, sparing you the trouble of replugging all cables. Output to a monitor occurs either via the integrated HDMI® or the DisplayPort™ output. You can also switch between the audio signals for the microphone and speaker. In addition, two USB 3.0 ports are included on the front side for use with other peripheral devices like USB sticks or external hard drives on both PCs. If you place the KVM switch in an inaccessible location, you can use the IR receiver and connection cable included in delivery even if the KVM switch itself is not within the range of the remote control. Status LEDs on the front side of the switch show you the current configuration at all times. The slim switch features the added benefits of sturdy metal housing and the option of wall mounting.

Operate 2 PCs with one USB keyboard and mouse – switch between two computers by pressing a button or with the remote control

- Inputs: 2 x DisplayPort™, 2 x USB B (3.0), 2 x audio input, 2 x audio output
- Output: 1 x DisplayPort™, 1 x HDMI®, 1 x audio input, 1 x audio output, 2 x USB A 2.0
- Additional connections front side: 2 x USB A 3.0, 1 x audio input, 1 x audio output, infrared receiver, IR output
- Audio inputs/outputs: 3.5 mm stereo jack socket
- LED front side: Power, 2 x Online, 2 x Selection PC
- Switch: Power On/Off, Toggle PC1 / PC2
- HDMI® version: 2.0





- HDCP version: 2.2 / 1.4
- DisplayPort™ version: 1.2
- UHD resolution: 4096 x 2160p / 60 Hz
- Subsampling: RGB 4:4:4/ YCbCr 4:4:4/ YCbCr 4:2:2/ YCbCr 4:2:0
- Bandwidth DisplayPort™: 32.4 Gbps all channels (8.1 Gbps per channel), supports HDR
- Bandwidth HDMI®: 18 Gbps all channels (6 Gbps per channel), supports HDR
- Color depth DisplayPort™: 48 bit (all channels)
- Color depth HDMI®: 36 bit (all channels)
- Power supply power adapter: 100 - 240 V AC / 50/60 Hz, 0.4 A
- Power supply KVM switch: 5 V / 3 A
- Operating temperature: 0°C ~ 45°C
- Operating humidity: 10% - 85% RH (non-condensing)
- Housing material: Metal
- Installation bracket for wall mounting included
- External receiver for signals from remote control included
- Dimensions: 17.8 x 7.5 x 2.9 cm (WxDxH)
- Dimensions: 17.8 x 7.5 x 2.9 cm (WxDxH)
- Weight: 372.8 g
- Color: Black

Package contents

- 1 x KVM Switch, 2-Port, 4K60Hz, 2 x DP in, 1 x DP/HDMI out
- 1 x Power adapter for KVM switch
- 2 x USB 3.0 connection cable (USB B to USB A)
- 2 x DisplayPort™ cable 1.2 m
- 1 x Infrared remote control
- 1 x Infrared recipient with connection cable
- 2 x Mounting bracket for table/wall installation
- 1 x User manual

| Logistics | | | | | | |
|------------------------------|--------------|-------------|------------|------------|-------------|-----------|
| | Number (pcs) | Weight (kg) | Depth (cm) | Width (cm) | Height (cm) | cm³ |
| Packaging Unit Carton | 10 | 10.00 | 35.00 | 48.00 | 21.00 | 35,280.00 |
| Packaging Unit Inside | 1 | 1.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Packaging Unit Single | 1 | 1.00 | 18.00 | 23.00 | 6.50 | 2,691.00 |
| Net single without Packaging | 1 | 0.80 | 18.00 | 23.00 | 6.50 | 2,691.00 |

More images:

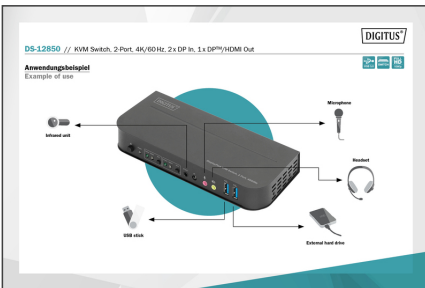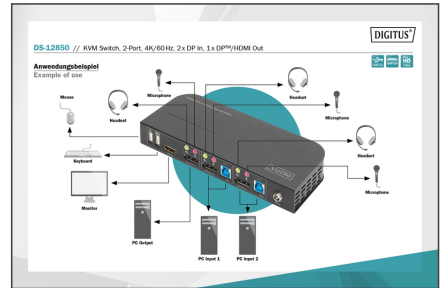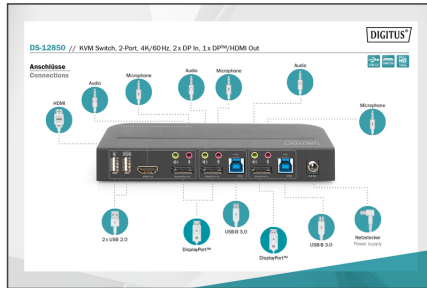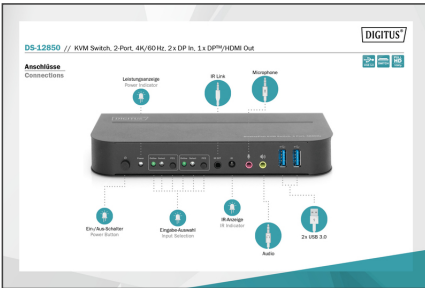

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Audio Cables](#) / [Video Cables](#) / [RCA Cables](#) category:

Click to view products by [Digitus](#) manufacturer:

Other Similar products are found below :

[1-3737-600-3216](#) [LF3BLX](#) [30-513](#) [28-511-0](#) [RCA05RCAB](#) [427493000-3](#) [49152A-010-S2](#) [32-3766](#) [32HR07284X](#) [CAB-LFH-V16A16S0](#)
[DB25M02XLRMXLRFY](#) [426052000-3](#) [LF1BKX](#) [TT746](#) [CA-MINIDP-DVIM-6FT](#) [CA-MINIDP-DVIM-3FT](#) [CA-MINIDP-DVIM-10FT](#)
[CA-MINIDP-VGAF-3FT](#) [CA-MINIDP-HDMIF-6FT](#) [MDC8P53](#) [LF10GNX](#) [427492100-3](#) [LF4BLX](#) [cab-DP to HDMI Passive](#) [VGA CABLE](#)
[DISPLAYPORT TO VGA CABLE](#) [TT3GNX](#) [1700021831-01](#) [Audio Cable](#) [427491690-3](#) [427528000-3](#) [TT2PX](#) [SPEAKER CABLE](#)
[L=300mm](#) [Speaker cable](#) [594E3412000E](#) [32007-005500-200-RS](#) [BCLBH](#) [BANHF](#) [BAPHG](#) [COQBI](#) [COQBG](#) [COEHG](#) [COJBI](#) [DAEBK](#)
[51771](#) [39448](#) [VAB-S04-L](#) [VAS-A13-B200](#) [VAS-A13-B300](#) [KABADA USBC/JACK OEM-C11](#)