

# DIGITUS 4K HDMI Extender via CAT/IP (receiver unit), PoE

DS-55125  
EAN 4016032455219



### 4K HDMI Extender, Receiver Unit over IP/CAT 5, 6 (120m), POE powered

The 4K HDMI extender set (DS-55124) contains a transmitter unit and a receiver unit. The units do not require external power supply, they are powered by an additional PoE switch. Additional PoE switches or the existing infrastructure allows the HDMI signal to be extended over an unlimited distance (IP connection). Additional receiver units (DS-55125) allow video contents to be displayed on up to 253 screens. Use your existing network infrastructure or additional PoE switches (point-to-multipoint connection) for this purpose. 4K video contents can be displayed at a distance of up to 120 meters with a single point-to-point connection (power supply required). Put displays and TVs wherever you like, no matter where the output source is.

### Extend the 4K HDMI Extender Set (DS-55124) with additional receiver units (DS-55125) and send your HDMI signals to up to 253 screens (point-to-multipoint connection)

- HDMI signal can be extended (unlimited distance) with the existing local network infrastructure or additional PoE switches (IP connection)
- Use additional receiver units (DS-55125) and your existing network infrastructure or additional PoE switches to display video contents on up to 253 screens (point-to-multipoint connection)
- Power supply through PoE switch - no external power supply required
- Supports CAT 5, CAT 5e, CAT 6 and CAT 7 network cables
- Supports 4K (30 Hz), 3840 x 2160p resolution
- HDMI bandwidth: 10.2 Gbit/s (max.)



- HDMI version: 1.4
- HDCP version: 1.4
- Integrated IR interface - simple remote control of the input source
- Resolutions: 4K (30 Hz), 1080p, 1080i, 720p, 576p, 576i, 480p, 480i
- Supports HDTV
- Supports Deep Color (24 bit)
- Supports uncompressed audio signals like LPCM
- Operation temperature: 0°C - 60°C
- Metal casing
- Suitable for wall mounting
- Compact size, easy to operate and install
- Dimensions: L 11.9 x W 9.4 x H 2.4 cm
- Weight: 0.275 kg
- Color: Black
- HDTV Resolution max.: 3840 x 2160 Pixel, 30Hz
- HDTV Standard: Ultra HD 4K
- Category: CAT 5e
- Distance: 120 m
- KVM: no
- PoE (Power over Ethernet): yes
- PoE (Power over Ethernet): yes
- Transmission technology: CAT, IP
- Video connection ports: HDMI

### Package contents

- 1x HDMI Extender receiver unit
- 1x IR receiver unit
- User manual

Logistics						
	Number (pcs)	Weight (kg)	Depth (cm)	Width (cm)	Height (cm)	cm <sup>3</sup>
Packaging Unit Carton	20	8.20	42.50	31.50	42.00	56,227.50
Packaging Unit Inside	1	0.41	20.00	14.90	8.00	2,384.00
Packaging Unit Single	1	0.41	20.00	14.90	8.00	2,384.00
Net single without Packaging	1	0.19	20.00	14.90	8.00	2,384.00

More images:

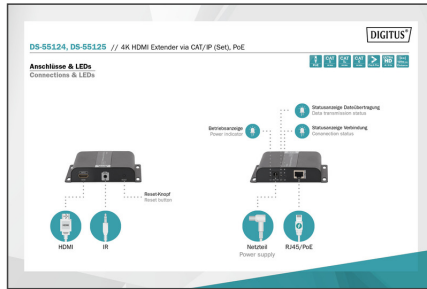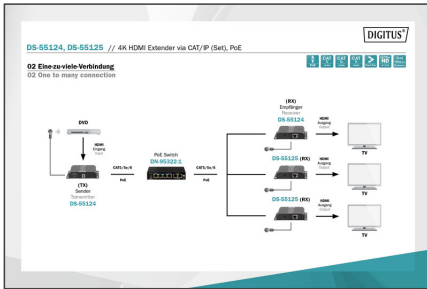

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [HDMI, Displayport & DVI Connectors](#) category:*

*Click to view products by [Digitus](#) manufacturer:*

Other Similar products are found below :

[30-528](#) [30-504](#) [33DVIR-24S1B](#) [47648-2000](#) [TC142X](#) [HAGBH](#) [AABII](#) [AAIBG](#) [AAIBH](#) [AANBG](#) [52355](#) [XHLJQ-00026](#) [HDMI-019R](#)  
[G46M2013201AWEU](#) [ST-0277D00-052-142](#) [PJ-399M](#) [PJ-615-5A](#) [HDMI-S-125-D](#) [PJ-359](#) [PJ-3850-5A](#) [PJ-3250D-5A](#) [KH-PJ-359](#) [58490](#)  
[DS-45404](#) [60907](#) [60616](#) [AAMBJ](#) [61275](#) [61161](#) [61297](#) [KABHD](#) [OEM-40](#) [61293](#) [61304](#) [DS-45316](#) [50355](#) [AK-330115-010-S](#) [AK-330101-](#)  
[002-S](#) [AHCBI](#) [AK-330127-300-S](#) [AAGBH](#) [CG526-B-3.0](#) [64866](#) [CG525-R-1.8](#) [61296](#) [CG865-3](#) [CG517-3.0](#) [EAEBD](#) [65262](#) [CG862-1.5](#)  
[AK-340103-050-S](#)