

DIGITUS HDMI IP Extender Set, Full HD

DS-55517
EAN 4016032482666



HDMI IP Video Extender Set, 120m Full HD, 1080p, one-to-many

The HDMI Extender Set is a powerful video distribution system that consists of one transmitter/receiver unit. It extends Full HD AV signals using a CAT6 network cable (point-to-point connection) up to 120 m. In addition, using network switches and the individual receiver units (DS-55518), you can distribute your video content over up to 253 displays via the already existing network (IP connection) and extend them over an unlimited distance. The additional integrated unidirectional IR interface enables remote control of the input source from the output screen (receiver side).

Use additional receiver units (DS-55518) and your existing network infrastructure/network switches to display video content on up to 253 screens (IP connection)

- Use additional receiver units (DS-55518) and your existing network infrastructure to display video content on up to 253 screens (IP connection)
- Extends Full HD AV signals with a CAT6 cable over an unlimited distance via the existing local network infrastructure or commercial network switches
- Extends Full HD AV signals with a CAT6 cable up to 120 m (point-to-point connection)
- Supports resolutions of up to 1080p/60Hz, Full HD
- Supports CAT 6, CAT 6A, CAT 7, CAT 8 network cable
- IR interface enables remote control of the input source from the output screen
- HDCP 1.3
- Transmitter unit connections:
- 1x HDMI input (1080p/60Hz) - Connection signal source




- 1x RJ45 output - Connection CAT transmission cable
- 1x IR output - Connection of IR transmitter
- 1x Power adapter input (DC 5V/2A) - Connection for external power adapter
- 1x Reset button
- Receiver unit connections:
- 1x HDMI output (1080p/60Hz) - Connection output device
- 1x RJ45 input - Connection CAT transmission cable
- 1x IR input - Connection of IR receiver
- 1x Power adapter input (DC 5V/2A) - Connection for external power adapter
- Suitable for wall mounting
- Operating temperature: 0-50°
- Power consumption: 8W
- Housing: Metal
- Dimensions (1 unit): L 10 x W 5.9 x H 2.5 cm
- Weight (1 unit): 165 g
- Color: black
- KVM: no
- KVM: no
- PoE (Power over Ethernet): no

Package contents

- 1x Transmitter unit
- 1x Receiver unit
- 1x IR transmission cable (1.2 m)
- 1x IR receiver cable (1.2 m)
- 2x Power adapter (DC 5V/2A, 1.15 m)
- 1x Mounting material
- 1x User manual

Logistics						
	Number (pcs)	Weight (kg)	Depth (cm)	Width (cm)	Height (cm)	cm ³
Packaging Unit Carton	20	15.40	62.00	51.00	23.00	72,726.00
Packaging Unit Inside	1	0.77	0.00	0.00	0.00	0.00
Packaging Unit Single	1	0.77	24.30	19.60	6.00	2,857.68
Net single without Packaging	1	0.59	24.30	19.60	6.00	2,857.68

More images:

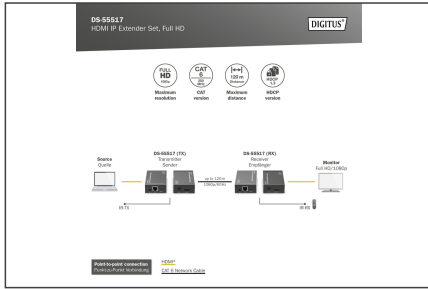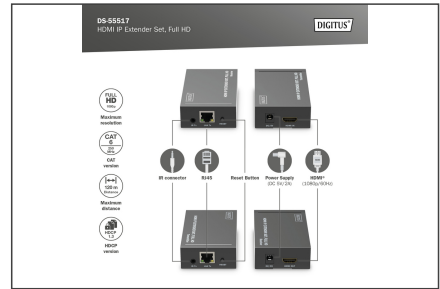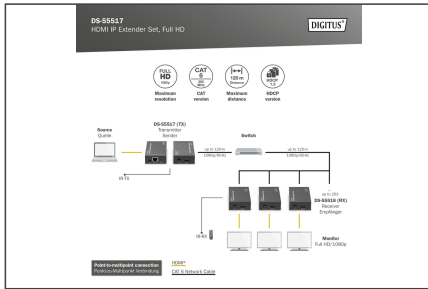

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [HDMI, Displayport & DVI Connectors](#) category:

Click to view products by [Digitus](#) manufacturer:

Other Similar products are found below :

[30-528](#) [30-504](#) [33DVIR-24S1B](#) [47648-2000](#) [TC142X](#) [HAGBH](#) [AABII](#) [AAIBG](#) [AAIBH](#) [AANBG](#) [52355](#) [XHLJQ-00026](#) [HDMI-019R](#)
[G46M2013201AWEU](#) [ST-0277D00-052-142](#) [PJ-399M](#) [PJ-615-5A](#) [HDMI-S-125-D](#) [PJ-359](#) [PJ-3850-5A](#) [PJ-3250D-5A](#) [KH-PJ-359](#) [58490](#)
[DS-45404](#) [60907](#) [60616](#) [AAMBJ](#) [61275](#) [61161](#) [61297](#) [KABHD](#) [OEM-40](#) [61293](#) [61304](#) [DS-45316](#) [50355](#) [AK-330115-010-S](#) [AK-330101-](#)
[002-S](#) [AHCBI](#) [AK-330127-300-S](#) [AAGBH](#) [CG526-B-3.0](#) [64866](#) [CG525-R-1.8](#) [61296](#) [CG865-3](#) [CG517-3.0](#) [EAEBD](#) [65262](#) [CG862-1.5](#)
[AK-340103-050-S](#)