

DIO1269

Low-Voltage Dual-SPDT (1Ω) Analog Switch with Negative Swing Audio Capability


Features

- 1Ω Typical On Resistance (R_{ON}) for +3.0V Supply
- 0.5Ω R_{ON} Flatness for +3.0V Supply
- -3dB Bandwidth: 180MHz
- Low- I_{CCT} Current Over an Expanded Control Input Range
- Green Packaged in DQFN-10
- Power-Off Protection on Common Ports
- Broad VCC Operating Range: 2.7V to 4.5V

Applications

- Cell Phone, and Digital Camera
- PDA , and Notebook
- LCD Monitor
- TV, and Set-Top Box


Block Diagram

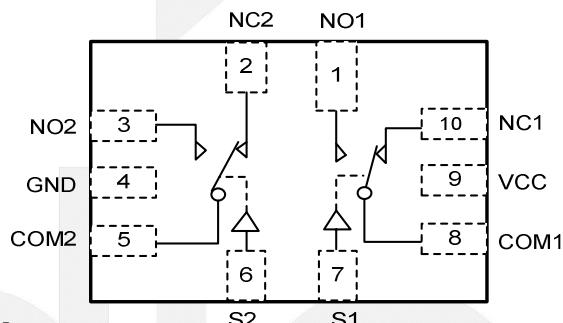

Ordering Information

Order Part Number	Top Marking		T_A	Package	
DIO1269LP10	YW GB	Green	-40 to +85°C	DQFN-10	Tape & Reel, 3000

Marking Definition



Pin Assignments

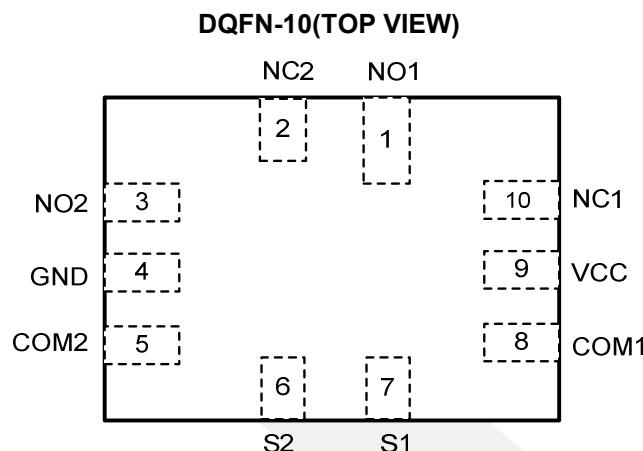


Figure 1 Pin Assignment

Pin Description

Pin Name	Description
NO1	Data Ports
NC2	Data Ports
NO2	Data Ports
GND	Ground
COM2	Data Ports
S2	Switch Select Pins
S1	Switch Select Pins
COM1	Data Ports
VCC	Supply Voltage
NC1	Data Ports

Truth Table

Control Input, Sn	Function
Low Logic Level	NC connected to COM
High Logic Level	NO connected to COM



DIO1269

Absolute Maximum Ratings

Stresses beyond those listed under "Absolute Maximum Rating" may cause permanent damage to the device. These are stress ratings only and functional operation of the device at these or any other condition beyond those indicated in the operational sections of the specifications is not implied. Exposure to absolute maximum rating conditions for extended periods may affect device reliability.

Parameter	Rating	Unit
Supply Voltage (VCC)	-0.5 to 5.5	V
Switch I/O Voltage (NC, NO, COM Pins)	-2 to (V ₊) +0.3	V
Control Input Voltage (S1,S2 Pins)	-0.5 to (V ₊) +0.3	V
Switch I/O Current (Continuous)	350	mA
Peak Switch Current (Pulsed at 1ms Duration,<10 Duty Circle)	500	mA
Storage Temperature Range (T _{STG})	-65 to 150	°C
Junction Temperature	150	°C
Lead Temperature Range	260	°C
MSL (Moisture Sensitivity Level, JEDEC J-STD-020A)	1	
ESD	HBM, JEDEC: JESD22-A114	8
	CDM, JEDEC : JESD22-C101	2
		kV

Note: Input and output negative ratings may be exceeded if input and output diode current ratings are observed.

Recommended Operating Conditions

The Recommended Operating Conditions table defines the conditions for actual device operation to ensure optimal performance to the datasheet specifications. DIOO does not recommend exceeding them or designing to Absolute Maximum Ratings.

Parameter	Rating	Unit
Supply Voltage	2.7 to 4.5	V
Control Input Voltage (S1,S2 Pins)	0 to VCC	V
Switch I/O Voltage (NC, NO, COM Pins)	-2 to VCC	V
Operating Temperature Range	-40 to 85	°C

Note: For 4.5V operation, SEL frequency (pins S1 & S2) should not exceed 100Hz and 50ns edge rate.



DIO1269

Electrical Characteristics

Typical value: VCC=2.7V to 5.5V, TA = 25°C, unless otherwise specified.

Symbol	Parameter	Conditions	Min.	Typ.	Max.	Unit
ANALOG SWITCH						
Vsw	Switch I/O voltage	2.5≤VCC≤3.5V	-2		V ₊	V
		3.5≤VCC≤5.0V				
R _{ON}	Switch On Resistance	I _{ON} =100mA, NO/NC =0.7, 3.6, 4.5V; VCC =4.5V		1		Ω
		I _{ON} =100mA, NO/NC =0.7, 3.6V; VCC =3V				
		I _{ON} =100mA, NO/NC =0, 0.7, 1.6, 2.3V; VCC =2.7V				
ΔR _{ON}	On resistance matching between channels	I _{ON} =100mA, NO/NC =0.7V, VCC =4.5V		0.04	0.13	Ω
		I _{ON} =100mA, NO/NC =0.7V, VCC =3V				
		I _{ON} =100mA, NO/NC =0.7V, VCC =2.7V				
R _{FLAT(ON)}	On resistance flatness	I _{OUT} =100mA, NO/NC =0 to VCC, VCC =4.5V		1	Ω	
		I _{OUT} =100mA, NO/NC =0 to VCC, VCC =3V				
		I _{OUT} =100mA, NO/NC =0 to VCC, VCC =2.7V				
I _{B(OFF)}	Source off leakage current	COM=0.5, VCC -0.5V, NO/NC = VCC -0.5, 0.5V, floating VCC =2.7 to 4.5V	-50		50	nA
I _{A(ON)}	Channel ON leakage current	COM=0.5, VCC -0.5V, NO/NC = VCC -0.5, 0.5V, floating VCC =2.7 to 4.5V	-20		20	nA
I _{OFF}	Power off leakage current	VCC =0V, NO/NC floating, COM =4.5V	-1		+1	μA
I _{CC}	Quiescent supply current	V _{IN} = 0 or V _{CC} , Iout=0, VCC =4.5V		32		μA
I _{CCT}	Increase in I _{CC} per input	Input at 2.6V, VCC =4.5V		3	10	μA
		Input at 1.8V, VCC =4.5V		7	15	
DIGITAL INPUT						
V _{IH}	Input voltage high	VCC =4.6V		1.42		V
		VCC =4.2V		1.38		
		VCC =3.6V		1.30		
		VCC =3.2V		1.26		
		VCC =2.8V		1.21		
V _{IL}	Input voltage low	VCC =4.6V		0.64		V
		VCC =4.2V		0.6		
		VCC =3.6V		0.54		
		VCC =3.2V		0.49		
		VCC =2.8V		0.38		
I _{IN}	Input leakage	V _{IN} = 0 to VCC	-0.5		0.5	μA

Low-Voltage Dual-SPDT (1Ω) Analog Switch with Negative Swing Audio Capability



DIO1269

Electrical Characteristics (continued)

DYNAMIC CHARACTERISTICS						
ton	Turn on time	NO/NC=1.5V, $R_L=50\Omega$, $C_L=35\text{pF}$, VCC =2.7 to 4.5V		3		μs
toff	Turn off time	NO/NC =1.5V, $R_L =50\Omega$, $C_L =35\text{pF}$, VCC =2.7 to 4.5V		0.7		μs
t_{BBM}	Break before make time	NO/NC =1.5V, $R_L =50\Omega$, $C_L =35\text{pF}$, VCC =3.6 to 4.5V		3		μs
		NO/NC =1.5V, $R_L =50\Omega$, $C_L =35\text{pF}$, VCC =2.7 to 3.6V		5		
Q	Charge Injection	$C_L =1.0\text{nF}$, $V_S=0\text{V}$, $R_S=0\Omega$, VCC =2.7 to 4.5V		25		pC
O_{IRR}	Off Isolation	f=100kHz, $R_L =50\Omega$, $C_L =0\text{pF}$, VCC =2.7 to 4.5V		-70		dB
X_{TALK}	Crosstalk	f=100kHz, $R_L =50\Omega$, $C_L =0\text{pF}$, VCC =2.7 to 4.5V		-70		dB
BW	-3dB bandwidth	$R_L =50\Omega$, $C_L =0\text{pF}$, VCC =2.7 to 4.5V		180		MHz
THD	Total Harmonic Distortion	f=20Hz to 20kHz, $R_L =32\Omega$, $V_{IN}=2\text{Vpp}$, $V_{BIAS}=0\text{V}$ VCC =2.7 to 4.5V		0.006		%
C_{IN}	Control input capacitance	f=1MHz, VCC =0V		2.5		pF
C_{OFF}	Off capacitance	f=1MHz, VCC =3.3V		30		pF
C_{ON}	On capacitance	f=1MHz, VCC =3.3V		120		pF

Specifications subject to change without notice.

Test Diagrams

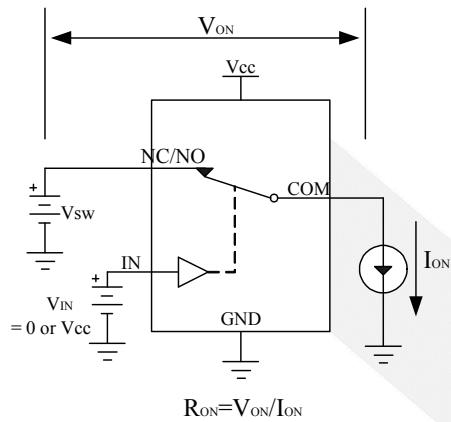


Figure 2 Switch on resistor

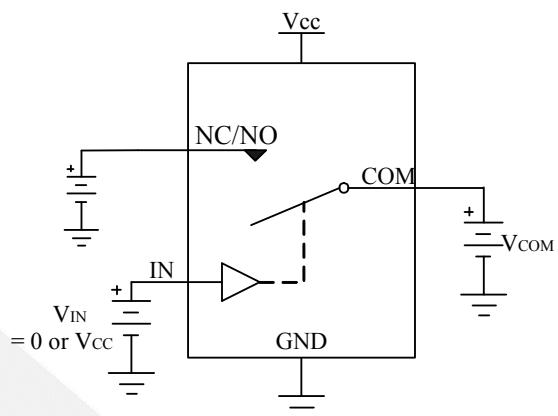


Figure 3 Switch Off Leakage

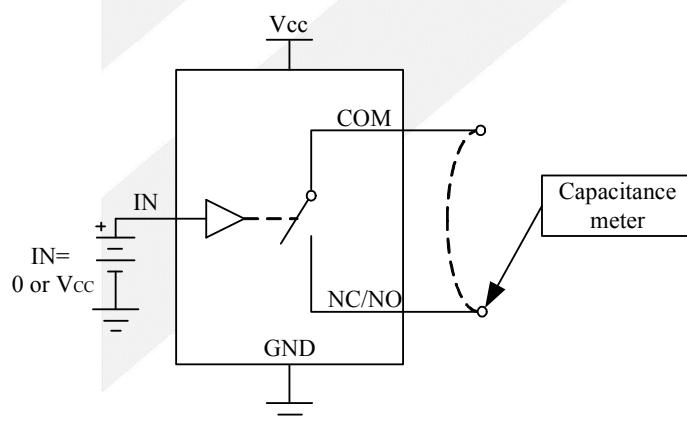


Figure 4 On/off Capacitance test

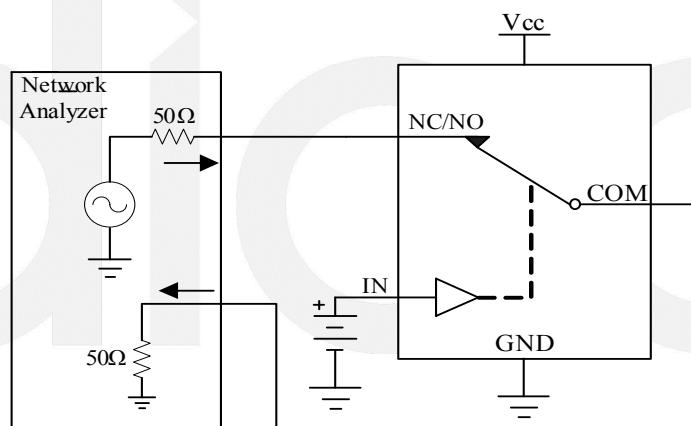


Figure 5 Bandwidth

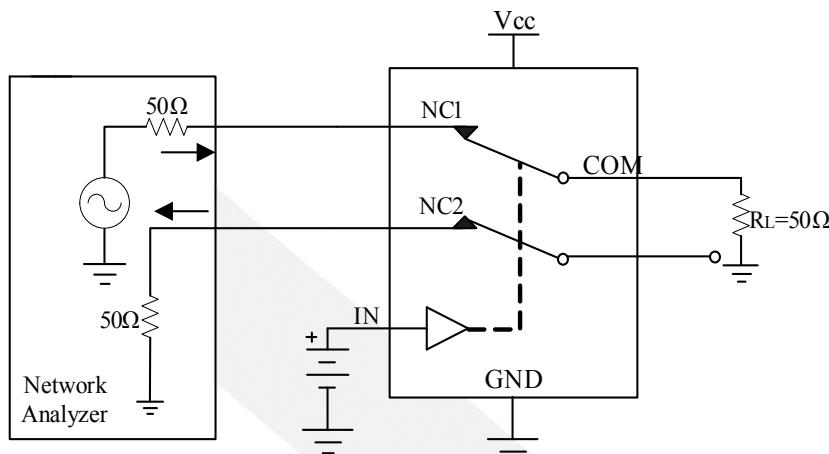


Figure 6 Channel-to-channel crosstalk

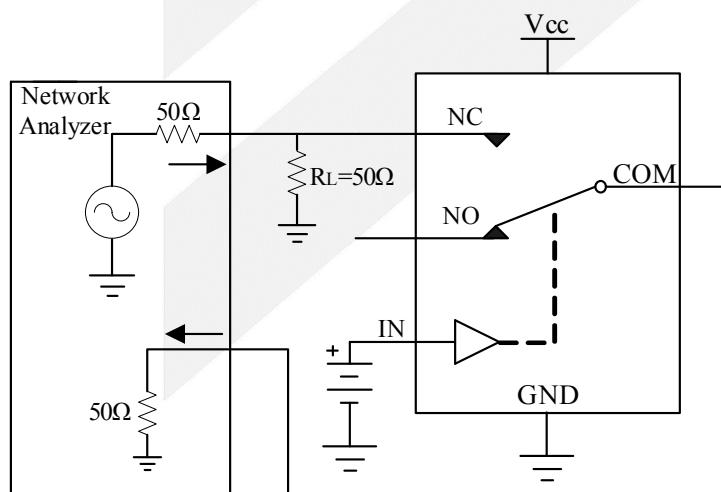


Figure 7 Off-isolation

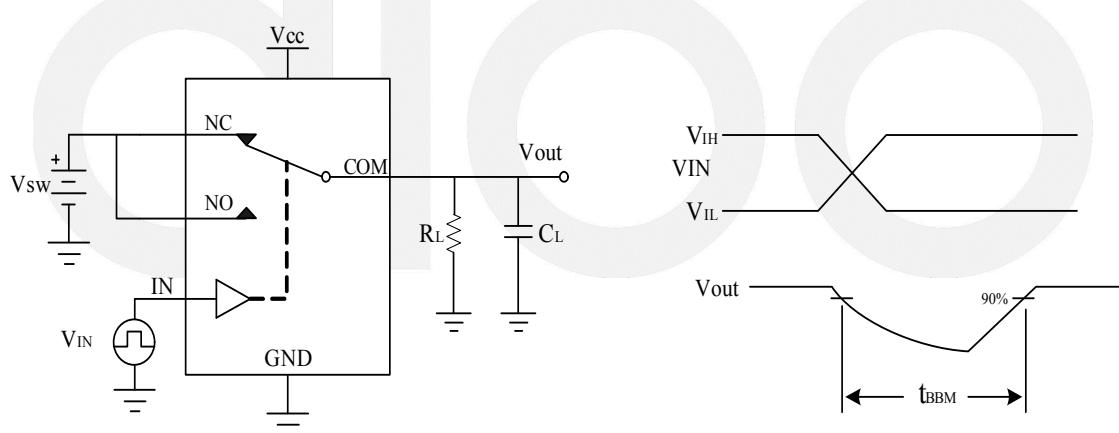


Figure 8 Break-Before-Make



DIO1269

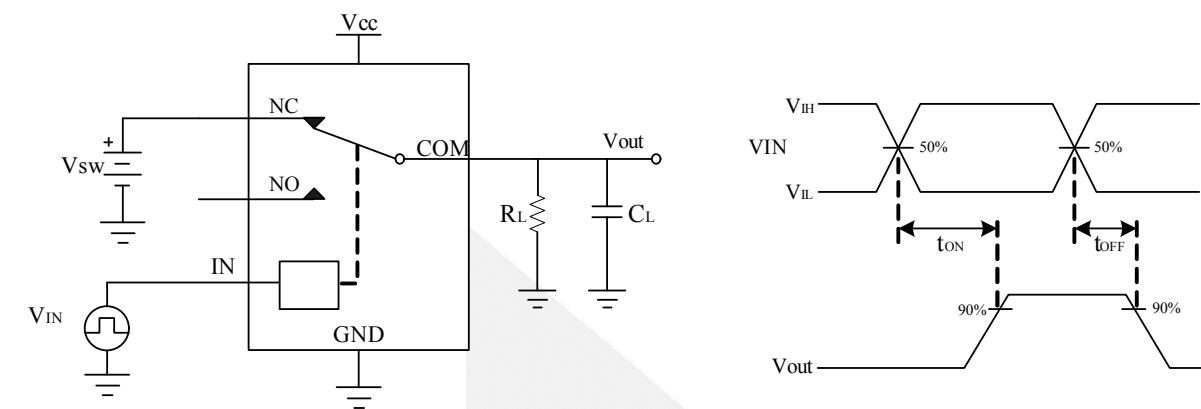


Figure 9 Turn-On/Turn-Off

Low-Voltage Dual-SPDT (1Ω) Analog Switch with Negative Swing Audio Capability




DIO1269


Typical Performance Characteristics

Low-Voltage Dual-SPDT (1Ω) Analog Switch with Negative Swing Audio Capability


Bandwidth vs. Frequency

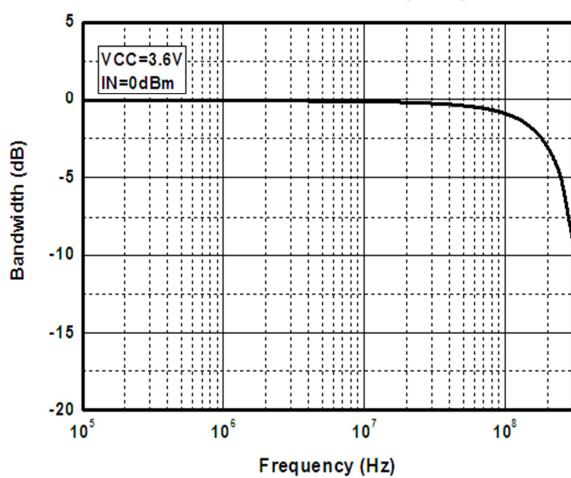


Crosstalk vs. Frequency

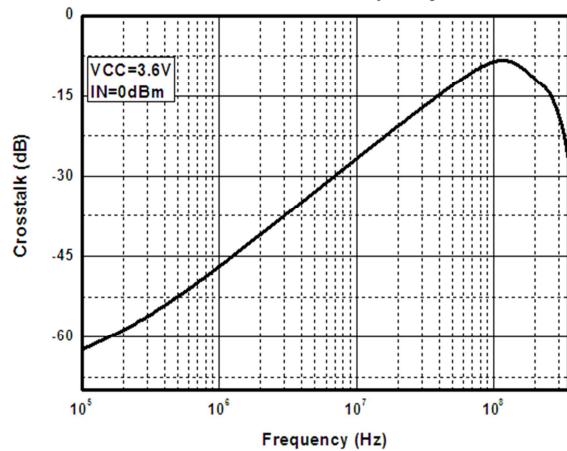

Off-isolation vs. Frequency

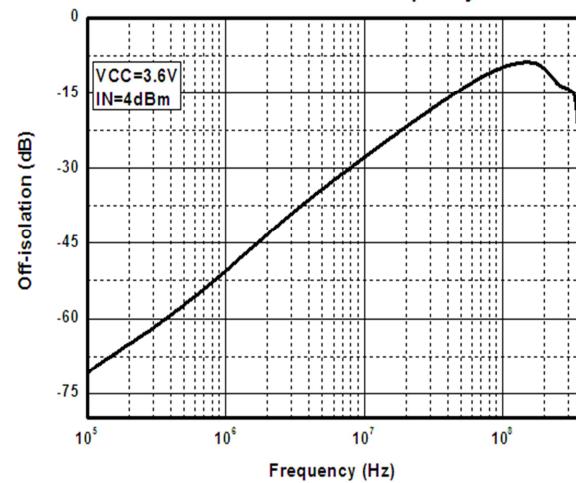

THD Ratio vs. Frequency

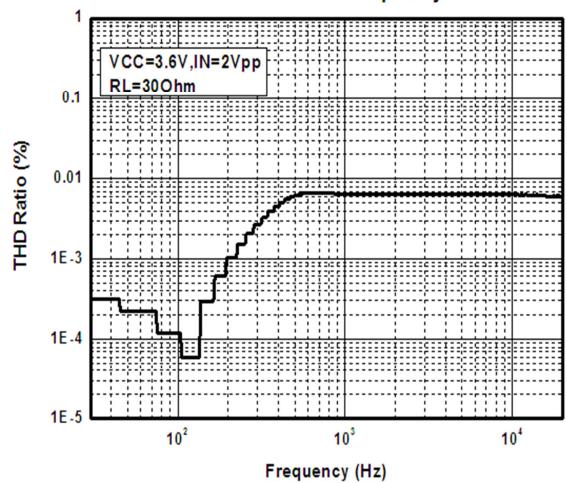



DIO1269

Low-Voltage Dual-SPDT (1Ω) Analog Switch with Negative Swing Audio Capability

CONTACT US

Dioo is a professional design and sales corporation for high-quality and performance analog semiconductors. The company focuses on industry markets, such as, cell phone, handheld products, laptop, and medical equipments and so on. Dioo's product families include analog signal processing and amplifying, LED drivers and charger IC. Go to <http://www.dioo.com> for a complete list of Dioo product families.

For additional product information, or full datasheet, please contact with our Sales Department or Representatives.



X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Analogue Switch ICs](#) category:

Click to view products by [Dioo manufacturer:](#)

Other Similar products are found below :

[FSA3051TMX](#) [NLAS4684FCTCG](#) [NLAS5223BLMNR2G](#) [NLVAS4599DTT1G](#) [NLX2G66DMUTCG](#) [425541DB](#) [425528R](#) [099044FB](#)
[NLAS5123MNR2G](#) [PI5A4599BCEX](#) [NLAS4717EPFCT1G](#) [PI5A3167CCEX](#) [SLAS3158MNR2G](#) [PI5A392AQE](#) [PI5A4157ZUEX](#)
[PI5A3166TAEX](#) [FSA634UCX](#) [TC4066BP\(N,F\)](#) [DG302BDJ-E3](#) [PI5A100QEX](#) [HV2605FG-G](#) [HV2301FG-G](#) [RS2117YUTQK10](#)
[RS2118YUTQK10](#) [RS2227XUTQK10](#) [ADG452BRZ-REEL7](#) [MAX4066ESD+](#) [MAX391CPE+](#) [MAX4730EXT+T](#) [MAX314CPE+](#)
[BU4066BCFV-E2](#) [MAX313CPE+](#) [BU4S66G2-TR](#) [NLAS3158MNR2G](#) [NLASB3157MTR2G](#) [TS3A4751PWR](#) [NLAS4157DFT2G](#)
[NLAS4599DFT2G](#) [NLAST4599DFT2G](#) [NLAST4599DTT1G](#) [DG300BDJ-E3](#) [DG2503DB-T2-GE1](#) [DG2502DB-T2-GE1](#)
[TC4W53FU\(TE12L,F\)](#) [74HC2G66DC.125](#) [ADG619BRMZ-REEL](#) [ADG1611BRUZ-REEL7](#) [LTC201ACN#PBF](#) [74LV4066DB,118](#)
[FSA2275AUMX](#)