**HOW TO ORDER** DTE-P- -





Package: T/R=Tape & Reel

V=RoHS & Lead Free Solderable Q=Halogen Free

## **FEATURES**

- \*Compact size
- %Two-way operation, auto return %Circuit type: Normally open


#### **APPLICATION**

- \*Detecting opening/ closing of DSC
- Computer peripheral
- **%Instruments**

## **SPECIFICATION**

Contact Rating	10mA, 5V DC
Contact Resistance	500m $Ω$ max.
Insulation Resistance	100M $\Omega$ min. 100V DC
Dielectric Strength	100V AC/1 minute
Operating Force	30gf max.
Travel	1.5mm
Operating Life	100,000 cycles
Operating Temp.	-10°C ~ +60°C
Storage Temp.	-40°C ~ +70°C

## **CIRCUIT**




## **PACKAGE**

<Tape & Reel> 3800 pcs

#### DTE-P

With Post

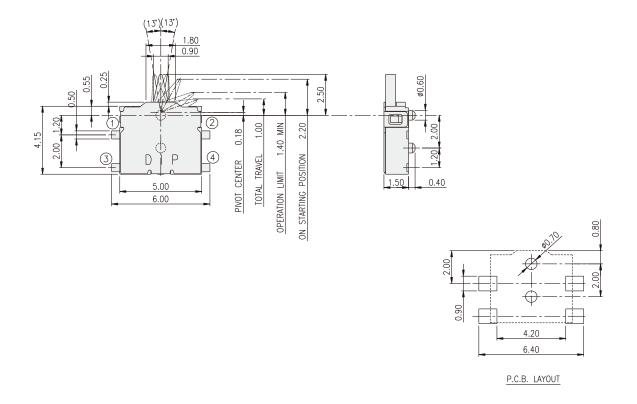

# **X-ON Electronics**

Largest Supplier of Electrical and Electronic Components

Click to view similar products for Basic / Snap Action Switches category:

Click to view products by Diptronics manufacturer:

Other Similar products are found below:

83228001 01.098.1358.1 602EN1-6B 602EN532 602EN535-RB 602HE5-RB1 604HE162 604HE223-6B 624HE17-RB 6HM89 6PA78-JM
6SE1 6SX1-H58 70500840 MBD5B1 MBH2731 73-316-0012 79211759 79211923 79218589 7AS12 ML-1155 ML-1376 831010C3.0
831060C3.TL 831090C2.EL 83131904 84212012 8AS239 8HM73-3 903VB1-PG 914CE1-6G PL-100 11SM1077-H4 11SM1077-H58
11SM1-TN107 11SM405 11SM703-T 11SM8423-H2 11SX37-T 11SX48-H58 11SX55-H58 11SM2442-T 11SM76-T 11SM77-H58
11SM77-T 11SM863-T 11SM866 11SX47-H58 A7CN-1M-1-LEFT