

FEATURES

- ※ Compact size
- ※ Two-way operation
- ※ Halogen Free


APPLICATION

- ※ Digital camera
- ※ Notebook
- ※ Automotive

SPECIFICATION

Contact Rating	50 μ A, 3V DC min. 1mA, 5V DC max.
Contact Resistance	2 Ω max.
Insulation Resistance	100M Ω min. 100V DC
Dielectric Strength	100V AC/1 minute
Operating Force	35gf max.
Travel	1.15mm
Operating Life	50,000 cycles
Operating Temp.	-10 $^{\circ}$ C ~ +60 $^{\circ}$ C
Storage Temp.	-40 $^{\circ}$ C ~ +85 $^{\circ}$ C


CIRCUIT

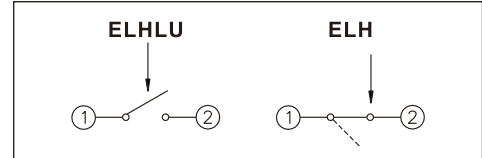

PACKAGE


<Tape & Reel>
3500 pcs

HOW TO ORDER

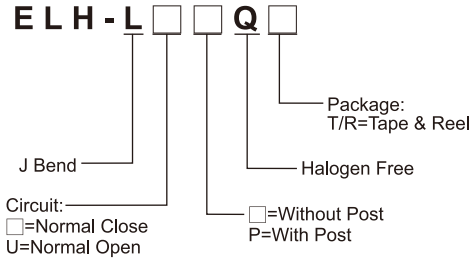

DETECTOR SWITCH

ELH

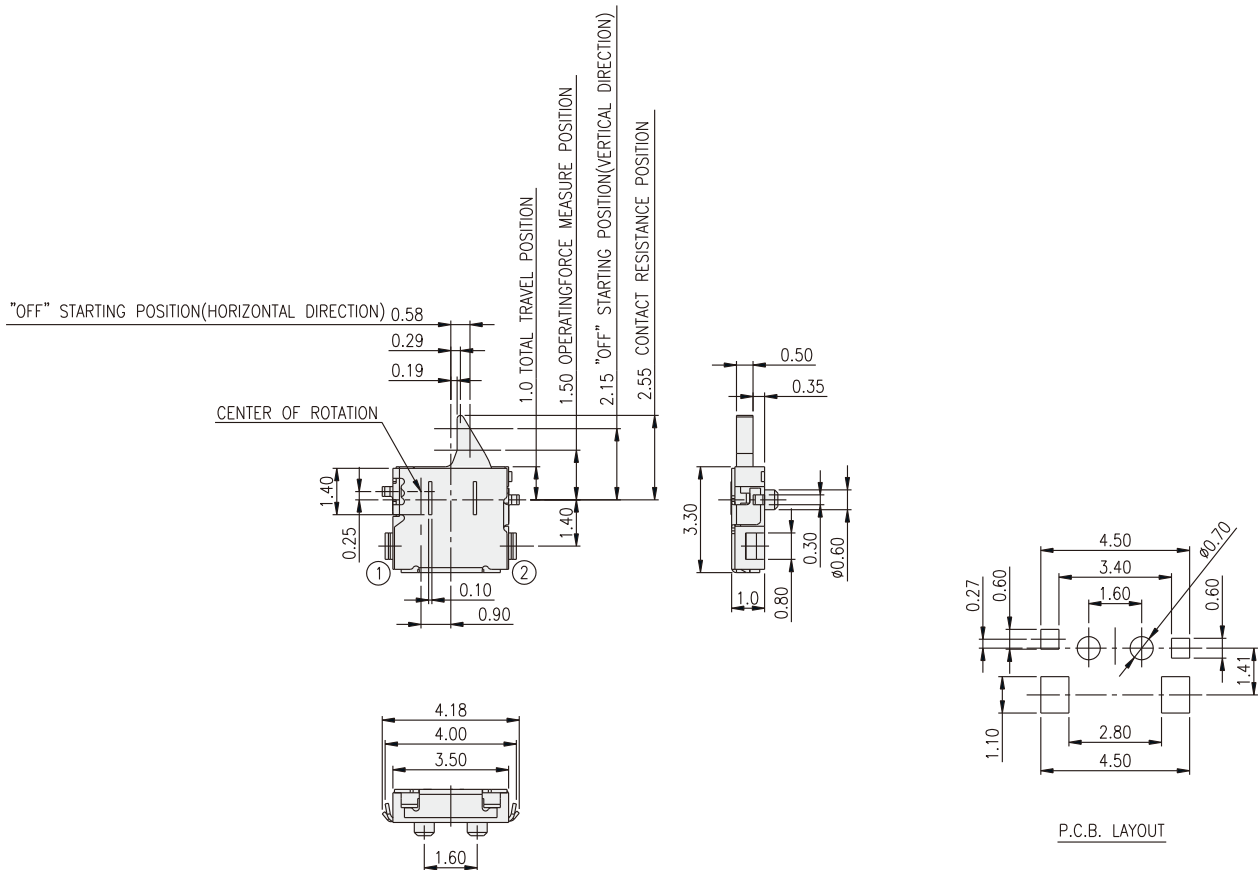

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Basic / Snap Action Switches](#) category:

Click to view products by [Diptronics](#) manufacturer:

Other Similar products are found below :

[83228001](#) [01.098.1358.1](#) [602EN1-6B](#) [602EN532](#) [602EN535-RB](#) [602HE5-RB1](#) [604HE162](#) [604HE223-6B](#) [624HE17-RB](#) [6HM89](#) [6PA78-JM](#)
[6SE1](#) [6SX1-H58](#) [70500840](#) [MBD5B1](#) [MBH2731](#) [73-316-0012](#) [79211759](#) [79211923](#) [79218589](#) [7AS12](#) [ML-1155](#) [ML-1376](#) [831010C3.0](#)
[831060C3.TL](#) [831090C2.EL](#) [83131904](#) [84212012](#) [8AS239](#) [8HM73-3](#) [903VB1-PG](#) [914CE1-6G](#) [PL-100](#) [11SM1077-H4](#) [11SM1077-H58](#)
[11SM1-TN107](#) [11SM405](#) [11SM703-T](#) [11SM8423-H2](#) [11SX37-T](#) [11SX48-H58](#) [11SX55-H58](#) [11SM2442-T](#) [11SM76-T](#) [11SM77-H58](#)
[11SM77-T](#) [11SM863-T](#) [11SM866](#) [11SX47-H58](#) [A7CN-1M-1-LEFT](#)