Tact Switch
Illuminated

FEATURES

※Various LED options
※300,000 operating life cycles

APPLICATION

※Automotive
※Network equipment
※Telecommunications
※Medical equipment
※Industrial controls

SPECIFICATION

Contact Rating	50mA, 32V DC
Contact Resistance	100mΩ max.
Insulation Resistance	100MΩ min. 100V DC
Dielectric Strength	250V AC/1 minute
Operating Force	400±100gf
Travel	0.45mm
Operating Life	300, 000 cycles
Operating Temp.	-40°C ~ +85°C
Storage Temp.	-55°C ~ +85°C

HOW TO ORDER

M L 9 - M □ □ □ Q R

- S.M.T.
- □=Without Post / P=With Post
- Operating Force: 4=400gf
- LED Color: □=Without LED, B=Blue, G=Green, R=Red, W=White, Y=Yellow, A=Amber
- Halogen Free
- Package: Tape & Reel

CIRCUIT

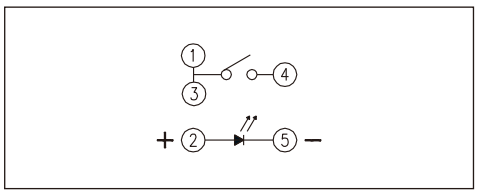

PACKAGE

<Tape & Reel>
650 pcs.

ML9

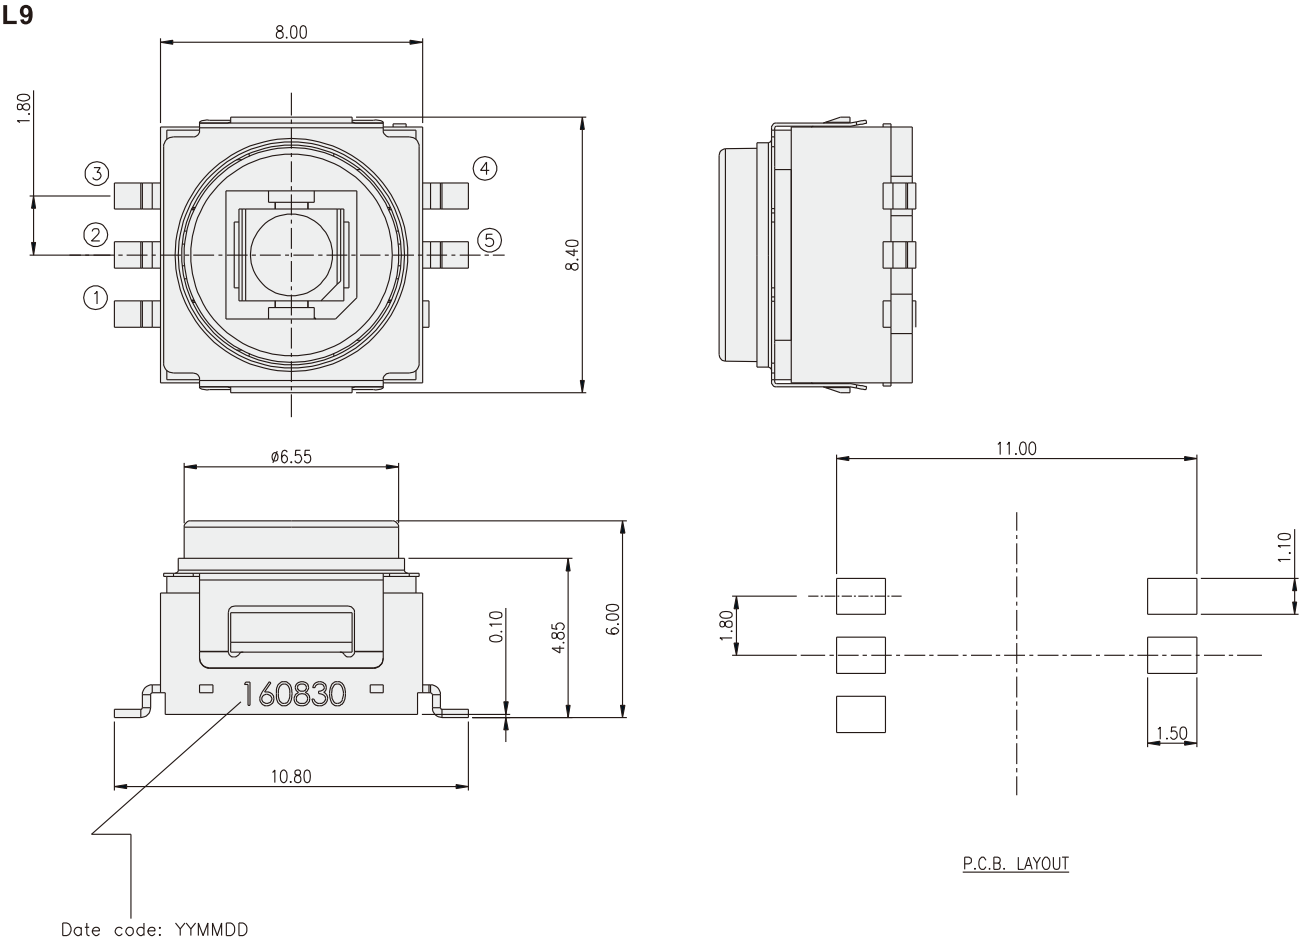

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for Tactile Switches ***category:***

Click to view products by Diptronics ***manufacturer:***

Other Similar products are found below :

5GTH92001 1-1977120-4 ADTSA62NV ADTSA62RV ADTSA63KV ADTSA644NV ADTSMW66NV ADTSMW67RV B3F-3123 B3F-6055A B3F-B32-01-KIT 1977177-8 1977266-1 ADTS644KV ADTSA61RV ADTSA62KV ADTSA63NV ADTSA63RV ADTSM21NSVTR ADTSM32NVTR ADTSM63SVTR ADTSM644KVTR ADTSMW64RV ADTSMW69NV FSMRA4JHA04 GS4.70F300QP 3ESH9R 506E00201 MJTP1164TR 3FTL600RAS 3FTL640RAS Y96K132V0FPLFS 101-TS5022T1601-EV 5GSH92001 KSJ0A231 80SH LFG ADTSM31NVTR EVQ-P1D05K MJTP1162TR ADTSM63KV 2-1977120-7 TSJW-5.2-260-TR KMT011MNGJLHS B3WN6002S ADTSA648RV 70-201.0 ADTSG648NV ADTSM62KSVTR ATA600VTR ADTSG66RV ADTS61NV