

Display Elektronik GmbH

DATA SHEET

TFT MODULE

DEM 800480U TMH-PW-N (C-TOUCH)

5,0“ TFT + PCT

Product Specification

Ver.: 2

30.01.2018

Revision History

| VERSION | DATE | REVISED PAGE NO. | Note |
|---------|------------|------------------|--------------------|
| 0 | 23.10.2017 | | First Issue |
| 1 | 02.11.2017 | | Add LED Lifetime |
| 2 | 30.01.2018 | | Modify temperature |

Contents

1. Summary
2. General Specification
3. Interface
4. Counter Drawing
5. Absolute Maximum Ratings
6. Electrical Characteristics
7. DC Characteristics
8. Optical Characteristics
9. Reliability

1. Summary

TFT 5.0" is a TN transmissive type color active matrix TFT liquid crystal display that use amorphous silicon TFT as switching devices. This module is a composed of a TFT LCD module. It is usually designed for industrial application and this module follows RoHS.

2. General Specifications

- Size: 5.0 Inch
- Dot Matrix: 800 x RGB x 480 Dots
- Module Dimension: 120.70 x 75.80 x 23.20 mm
- Active Area: 108.00 x 64.80 mm
- Dot Pitch: 0.045 x 0.135 mm
- LCD Type: TFT, Normally White TN, Transmissive
- View Direction: 12 O'Clock
- Gray Scale Inversion Direction: 6 O'Clock
- Aspect Ratio: 16:9
- Backlight Type: LED, Normally White
- Controller IC: TFP401
- Interface: HDMI
- With /Without TP: With Capacitive Touch
- CTP FW Version: A
- Surface: Glare

*Color tone slight changed by temperature and driving voltage.

3. Interface

3.1. LCM PIN Definition (CON5)

| Pin | Symbol | Function | Remark |
|-----|--------|-------------------------|--------|
| 1 | 3.3V | Raspberry Pi:Power 3.3V | |
| 2 | 5V | Raspberry Pi:Power 5V | |
| 3 | GPIO02 | Raspberry Pi:GPIO02 | |
| 4 | 5V | Raspberry Pi:Power 5V | |
| 5 | GPIO03 | Raspberry Pi:GPIO03 | |
| 6 | GND | Raspberry Pi:GND | |
| 7 | GPIO04 | Raspberry Pi:GPIO04 | |
| 8 | GPIO14 | Raspberry Pi:GPIO14 | |
| 9 | GND | Raspberry Pi:GND | |
| 10 | GPIO15 | Raspberry Pi:GPIO15 | |
| 11 | GPIO17 | Raspberry Pi:GPIO17 | |
| 12 | GPIO18 | Raspberry Pi:GPIO18 | |
| 13 | GPIO27 | Raspberry Pi:GPIO27 | |
| 14 | GND | Raspberry Pi:GND | |
| 15 | GPIO22 | Raspberry Pi:GPIO22 | |
| 16 | GPIO23 | Raspberry Pi:GPIO23 | |
| 17 | 3.3V | Raspberry Pi:3.3V | |
| 18 | GPIO24 | Raspberry Pi:GPIO24 | |
| 19 | GPIO10 | Raspberry Pi:GPIO10 | |
| 20 | GND | Raspberry Pi:GND | |
| 21 | GPIO09 | Raspberry Pi:GPIO09 | |
| 22 | GPIO25 | Raspberry Pi:GPIO25 | |
| 23 | GPIO11 | Raspberry Pi:GPIO11 | |
| 24 | GPIO08 | Raspberry Pi:GPIO08 | |
| 25 | GND | Raspberry Pi:GND | |
| 26 | GPIO07 | Raspberry Pi:GPIO07 | |
| 27 | ID_SD | Raspberry Pi:ID_SD | |
| 28 | ID_SC | Raspberry Pi:ID_SC | |
| 29 | GPIO05 | Raspberry Pi:GPIO05 | |
| 30 | GND | Raspberry Pi:GND | |
| 31 | GPIO06 | Raspberry Pi:GPIO06 | |
| 32 | GPIO12 | Raspberry Pi:GPIO12 | |
| 33 | GPIO13 | Raspberry Pi:GPIO13 | |
| 34 | GND | Raspberry Pi:GND | |
| 35 | GPIO19 | Raspberry Pi:GPIO19 | |
| 36 | GPIO16 | Raspberry Pi:GPIO16 | |
| 37 | GPIO26 | Raspberry Pi:GPIO26 | |
| 38 | GPIO20 | Raspberry Pi:GPIO20 | |
| 39 | GND | Raspberry Pi:GND | |
| 40 | GPIO21 | Raspberry Pi:GPIO21 | |

3.2. HDMI



| Pin No. | Symbol | I/O | Function | Remark |
|---------|--------|-----|---------------------------------|--------|
| 1 | Rx2+ | I | +LVDS Differential Data Input | |
| 2 | GND | P | Ground | |
| 3 | Rx2- | I | -LVDS Differential Data Input | |
| 4 | Rx1+ | I | +LVDS Differential Data Input | |
| 5 | GND | P | Ground | |
| 6 | Rx1- | I | -LVDS Differential Data Input | |
| 7 | Rx0+ | I | +LVDS Differential Data Input | |
| 8 | GND | P | Ground | |
| 9 | Rx0- | I | -LVDS Differential Data Input | |
| 10 | RxC+ | I | +LVDS Differential Clock Input | |
| 11 | GND | P | Ground | |
| 12 | RxC- | I | -LVDS Differential Clock Input | |
| 13-14 | NC | - | No connection | |
| 15 | SCL | I/O | DDC(Data Display Channel) Clock | |
| 16 | SDA | I/O | DDC(Data Display Channel) Data | |
| 17 | GND | P | Ground | |
| 18 | 5V | P | Power Supply | |
| 19 | Detect | I/O | Hot plug detect | |

I: input, O: output, P: Power

3.3. CTP USB PIN Definition (CON3)

| Pin | Symbol | Function | Remark |
|-----|--------|---------------|--------|
| 1 | 5V | Power 5V | |
| 2 | D- | Data line - | |
| 3 | D+ | Data line + | |
| 4 | NC | No connection | |
| 5 | GND | Power Ground | |

4. Counter Drawing

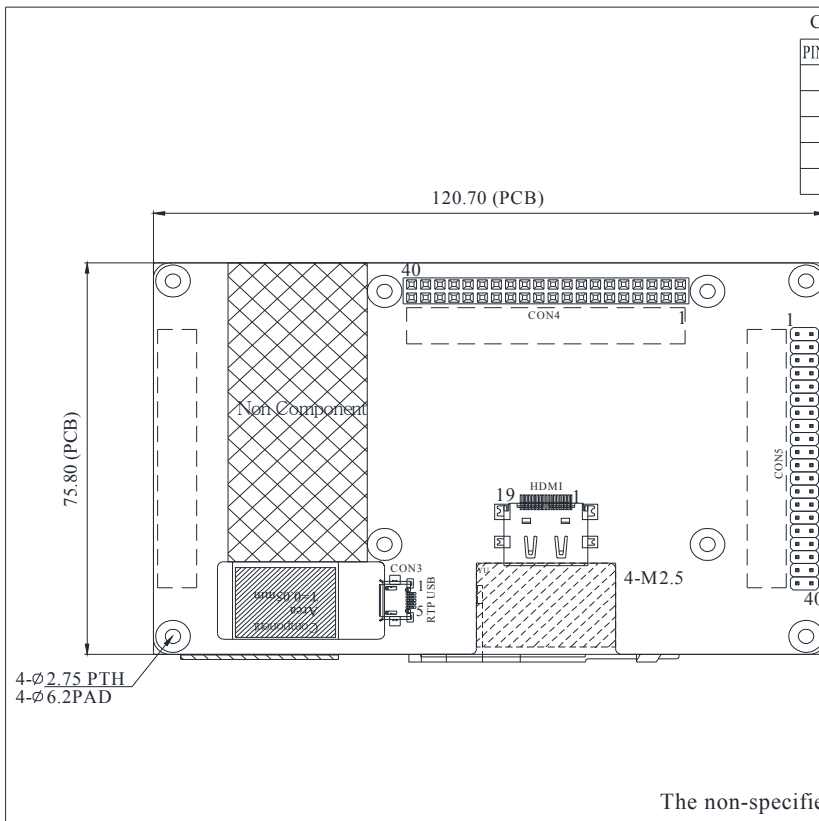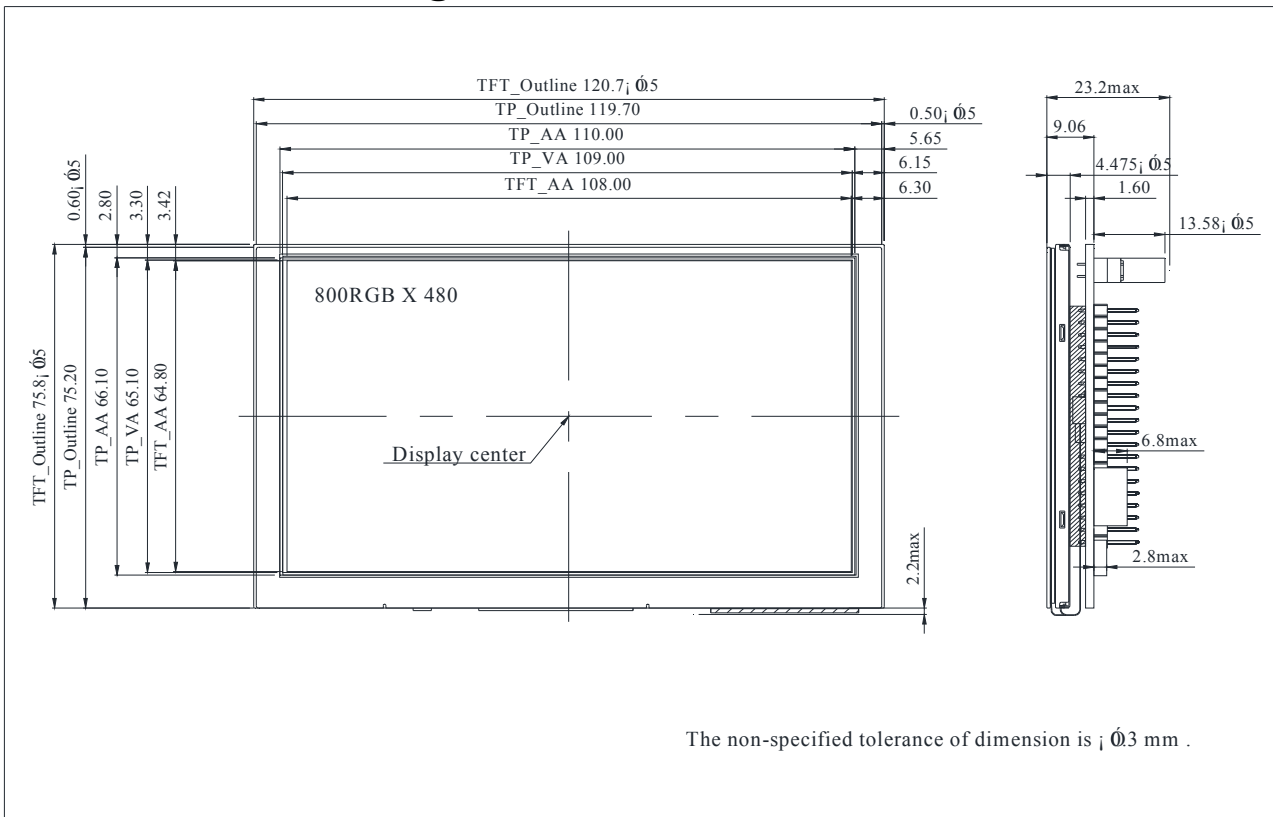

| CON3 | |
|---------|--------|
| PIN NO. | SYMBOL |
| 1 | 5V |
| 2 | D- |
| 3 | D+ |
| 4 | NC |
| 5 | GND |

| Pin | Symbol | Pin | Symbol |
|-----|--------|-----|--------|
| 1 | 3.3V | 21 | GPIO09 |
| 2 | 5V | 22 | GPIO25 |
| 3 | GPIO02 | 23 | GPIO11 |
| 4 | 5V | 24 | GPIO08 |
| 5 | GPIO03 | 25 | GND |
| 6 | GND | 26 | GPIO07 |
| 7 | GPIO04 | 27 | ID_SD |
| 8 | GPIO14 | 28 | ID_SC |
| 9 | GND | 29 | GPIO05 |
| 10 | GPIO15 | 30 | GND |
| 11 | GPIO17 | 31 | GPIO06 |
| 12 | GPIO18 | 32 | GPIO12 |
| 13 | GPIO27 | 33 | GPIO13 |
| 14 | GND | 34 | GND |
| 15 | GPIO22 | 35 | GPIO19 |
| 16 | GPIO23 | 36 | GPIO16 |
| 17 | 3.3V | 37 | GPIO26 |
| 18 | GPIO24 | 38 | GPIO20 |
| 19 | GPIO10 | 39 | GND |
| 20 | GND | 40 | GPIO21 |

The non-specified tolerance of dimension is ± 0.3 mm .

5. Absolute Maximum Ratings

| Item | Symbol | Min | Typ | Max | Unit |
|-----------------------|-----------------|-----|-----|-----|------|
| Operating Temperature | T _{OP} | -20 | — | +70 | °C |
| Storage Temperature | T _{ST} | -30 | — | +80 | °C |

Note: Device is subject to be damaged permanently if stresses beyond those absolute maximum ratings listed above

1. Temp. $\leq +60^{\circ}\text{C}$, 90% RH MAX. Temp. $> +60^{\circ}\text{C}$, Absolute humidity shall be less than 90% RH at $+60^{\circ}\text{C}$

6. Electrical Characteristics

6.1. Operating conditions:

| Item | Symbol | Condition | Min | Typ | Max | Unit | Remark |
|------------------------|--------|-----------|-----|--------|-----|------|-----------|
| Supply Voltage For LCM | VDD | — | 4.9 | 5 | 5.1 | V | - |
| Supply Current For LCM | IDD | — | — | 350 | 380 | mA | Note1,2,3 |
| LED Lifetime | — | VDD=5V | -- | 50,000 | - | Hr | Note4,5 |

Note 1: This value is test for VDD =5.0V, Ta=+25°C only

Note 2: Display with Raspberry pi the driver power is over USB, first make sure you have a 2A power supply, with a good quality USB cable, a thin wire power cable is no good. Make sure its 24AWG or smaller, shorter USB cables are better too.

Note3: CTP driver is base on the mouse driver program and through USB port connect to PC or embedded board. Can only support the single touch.

Note 4: The LED Supply Voltage is defined by the number of LED at Ta=+25°C and I_L =20mA/pcs.

Note 5: The “LED Lifetime” is defined as the module brightness decrease to 50% Original brightness at Ta=+25°C and I_L =20mA/pcs. The LED lifetime could be decreased if operating I_L is lager than 25mA/pcs.

7. DC CHARATERISTICS

| Parameter | Symbol | Rating | | | Unit | Condition |
|--------------------------|-----------------|--------|-----|--------|------|-----------|
| | | Min | Typ | Max | | |
| Low Level Input Voltage | V _{IL} | 0 | - | 0.3VDD | V | |
| High Level Input Voltage | V _{IH} | 0.7VDD | - | VDD | V | |

8. Optical Characteristics

| Item | Symbol | Condition. | Min | Typ. | Max. | Unit | Remark | |
|--|--------|-----------------------------------|------------|------|------|-----------------------|-------------------|------------|
| Response Time | Tr | $\theta=0^\circ$ 、 $\phi=0^\circ$ | - | 10 | 20 | .ms | Note 3,5 | |
| | Tf | | - | 15 | 30 | .ms | | |
| Contrast Ratio | CR | At optimized viewing angle | 400 | 500 | - | - | Note 4,5 | |
| Color Chromaticity | White | $\theta=0^\circ$ 、 $\phi=0^\circ$ | Wx | 0.26 | 0.31 | 0.36 | | Note 2,6,7 |
| | | | Wy | 0.28 | 0.33 | 0.38 | | |
| Viewing Angle (Gray Scale Inversion Direction) | Hor. | $CR \geq 10$ | Θ_R | 60 | 70 | - | Deg. | Note 1 |
| | | | Θ_L | 60 | 70 | - | | |
| | Ver. | | Φ_T | 40 | 50 | - | | |
| | | | Φ_B | 60 | 70 | - | | |
| Brightness | - | - | 300 | 400 | - | cd/ m ² | Center of display | |

Ta=+25°C±2°C

Note 1: Definition of viewing angle range

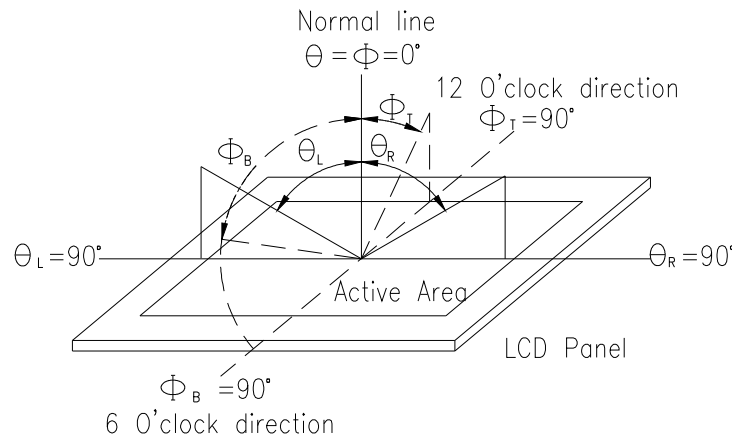


Fig. 9.1. Definition of viewing angle

Note 2: Test equipment setup:

After stabilizing and leaving the panel alone at a driven temperature for 10 minutes, the measurement should be executed. Measurement should be executed in a stable, windless, and dark room. Optical specifications are measured by Topcon BM-7or BM-5 luminance meter 1.0° field of view at a distance of 50cm and normal direction.


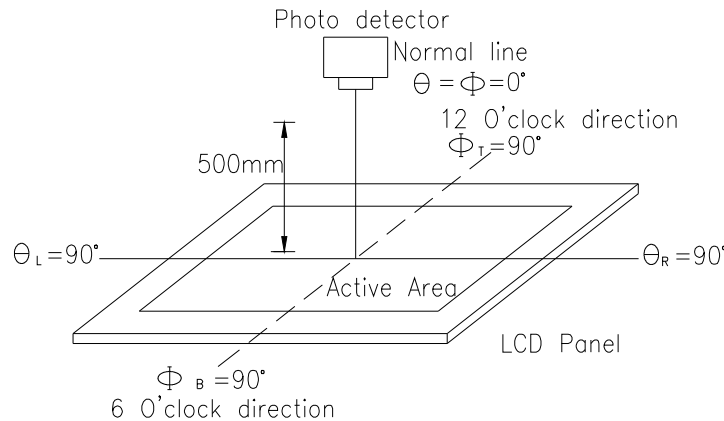


Fig. 9.2. Optical measurement system setup

Note 3: Definition of Response time:

The response time is defined as the LCD optical switching time interval between “White” state and “Black” state. Rise time, T_r , is the time between photo detector output intensity changed from 90% to 10%. And fall time, T_f , is the time between photo detector output intensity changed from 10% to 90%

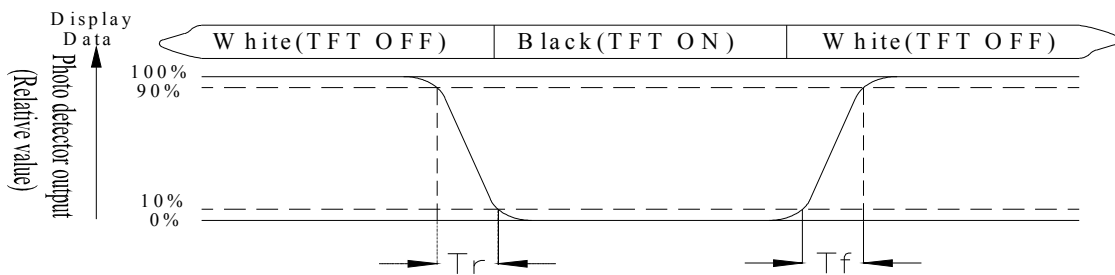

Note 4: Definition of contrast ratio:

The contrast ratio is defined as the following expression.

$$\text{Contrast ratio (CR)} = \frac{\text{Luminance measured when LCD on the "White" state}}{\text{Luminance measured when LCD on the "Black" state}}$$

Note 5: White $V_i = V_{i50} \pm 1.5V$

Black $V_i = V_{i50} \pm 2.0V$

“±” means that the analog input signal swings in phase with VCOM signal.

“±” means that the analog input signal swings out of phase with VCOM signal.

The 100% transmission is defined as the transmission of LCD panel when all the input terminals of module are electrically opened.


Note 6: Definition of color chromaticity (CIE 1931)

Color coordinates measured at the center point of LCD

Note 7: Measured at the center area of the panel when all the input terminals of LCD panel are electrically opened.

9. Reliability

Content of Reliability Test (Wide temperature, -20°C~+70°C)
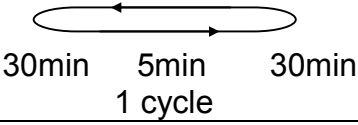
| Environmental Test | | | |
|---|--|---|------|
| Test Item | Content of Test | Test Condition | Note |
| High Temperature storage | Endurance test applying the high storage temperature for a long time. | +80°C 200hrs | 2 |
| Low Temperature storage | Endurance test applying the low storage temperature for a long time. | -30°C 200hrs | 1,2 |
| High Temperature Operation | Endurance test applying the electric stress (Voltage & Current) and the thermal stress to the element for a long time. | +70°C 200hrs | — |
| Low Temperature Operation | Endurance test applying the electric stress under low temperature for a long time. | -20°C 200hrs | 1 |
| High Temperature/ Humidity Operation | The module should be allowed to stand at +60°C,90%RH max | +60°C,90%RH 96hrs | 1,2 |
| Thermal shock resistance | The sample should be allowed stand the following 10 cycles of operation -20°C +25°C +70°C  | -20°C/+70°C 10 cycles | — |
| Vibration test | Endurance test applying the vibration during transportation and using. | Total fixed amplitude : 1.5mm Vibration Frequency : 10~55Hz One cycle 60 seconds to 3 directions of X,Y,Z for Each 15 minutes | 3 |
| Static electricity test | Endurance test applying the electric stress to the terminal. | VS=±600V(Contact) ±800V(Air), RS=330Ω CS=150pF 10 times | — |

Note1: No dew condensation to be observed.

Note2: The function test shall be conducted after 4 hours storage at the normal Temperature and humidity after remove from the test chamber.

Note3: The packing have to including into the vibration testing.

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [TFT Displays & Accessories](#) category:

Click to view products by [Display Elektronik](#) manufacturer:

Other Similar products are found below :

[OAI-80038AA-2013-A](#) [HDA430T-3G1H](#) [EA CARREDIPTFT02](#) [NL6448BC20-21D](#) [TM022HDHT11-00](#) [NB7W-KBA04](#) [NB-ATT01](#)
[NB5Q-ATT01](#) [NB5Q-KBA04](#) [NB-CN001](#) [NL12880BC20-05](#) [NL8060BC26-35C](#) [NL8060BC26-35F](#) [TCG104SVLQAPNN-AN20](#) [OAI-](#)
[80038AA-2008-A](#) [315-U004B15300](#) [UMSH-8596MD-34T \(REV D\)](#) [98-0003-3490-8](#) [1044278](#) [1029309](#) [1060549](#) [DE 127-TU-30/7,5](#) [DE](#)
[128-TU-20/7,5](#) [EP-LK007TFTPCAP](#) [FR7.0A00](#) [RC2002A-TIG-CSX](#) [NL6448BC2021C](#) [TX17D01VM2EAB](#) [TX14D23VM5BAA](#)
[TCG121WXLRXVNNANX35](#) [EIC-LCD-1080P](#) [T272480C07VR01](#) [1060632](#) [TCG070WVLPAANN-AN50](#) [TCG035QVLPDANN-GN50](#)
[1060630](#) [RFE430V-AIW-DNG](#) [T-55619GD065J-LW-ABN](#) [NHD-1.8-128160EF-SSXN-FT](#) [TCG104SVLPEANN-AN30](#) [NL6448BC33-70](#)
[NL192108BC18-06F](#) [NLB150XG02L-01](#) [NL6448BC20-30D](#) [NL10276BC16-06](#) [NL192108AC10-01D](#) [NL6448AC18-08F](#) [NL6448BC20-30F](#)
[NL12880BC20-05BD](#) [NL12880BC20-05D](#)