BAT54 A/C/S




BAT54 A/C/S SOT-23 Plastic-Encapsulate Schottky Barrier Diode

General description

SOT-23 Plastic-Encapsulate Schottky Barrier Diode


FEATURES

- High Current Capability
- Low Forward Voltage Drop
- Extremely Fast Switching Speed
- SOT-23 Small Outline Plastic Package
- Epoxy UL: 94V-0



SOT-23 Package

MARKING:



Maximum Ratings & Thermal Characteristics (Ratings at 25°C ambient temperature unless otherwise specified.)


Parameters	Symbol	Limit	Unit
Maximum repetitive peak reverse voltage	VRRM	30	V
Maximum RMS voltage	VRMS	21	V
Maximum DC blocking voltage	VDC	30	V
Maximum average forward rectified current	IFM	200	mA
Peak forward surge current 8.3 ms single half sinewave	IFSM	600	mA
Typical thermal resistance	RθJA	500	°C/W
Power Dissipation	PD	200	mW
Junction Temperature	Tj	125	°C
Storage temperature range	TSTG	-50-+150	°C


Electrical Characteristics (Ratings at 25°C ambient temperature unless otherwise specified).


Parameters	Symbol	Test conditions	Min	Тур	Max	Unit	
Maximum forward voltage	VF1	IF = 0.1mA			240		
	VF2	IF = 1.0mA			320		
	VF3	IF = 10mA			400		
	VF4	IF = 30mA			500	mV	
	VF5	IF = 100mA			1000		
Maximum reverse breakdown voltage	VR	IR=100uA	30			V	
Maximum reverse current	lR	VR=25V			2.0	uA	
Type junction capacitance	Cj	VR = 1.0V, f = 1MHz			10	pF	
Reverse Recovery time	trr	IF=IR=10mA Irr=0.1XIR,RL=100 Ω			5	ns	




Typical Characteristics

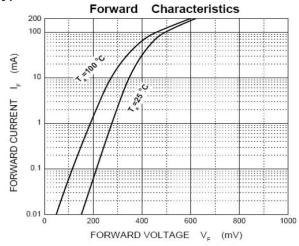


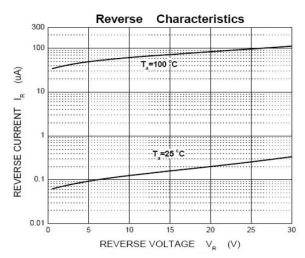

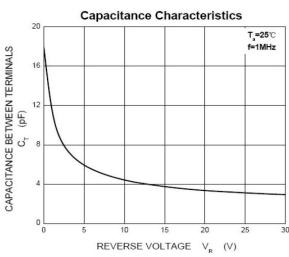


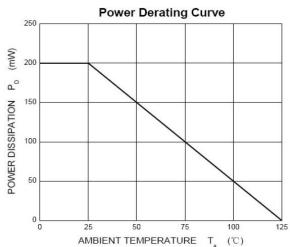

SOT-23 PACKAGE OUTLINE Plastic surface mounted package

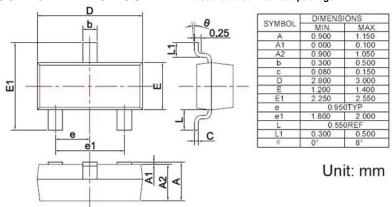

Precautions: PCB Design (Recommended land dimensions for SOT-23 diode. Electrode patterns for PCBs)



Note:

- 1.Controlling dimension; in millimeters.
- 2.General tolerance:± 0.05mm.
- 3. The pad layout is for reference purposes only.



Important Notice and Disclaimer

DOESHARE has used reasonable care in preparing the information included in this document, but DOESHARE does not warrant that such information is error free. DOESHARE assumes no liability whatsoever for any damages incurred by you resulting from errors in or omissions from the information included herein.

DOESHARE no warranty, representation or guarantee regarding the documents, circuits and products specification, DOESHARE reservation rights to make changes for any documents, products, circuits and specifications at any time without notice.

Purchasers are solely responsible for the choice, selection and use of the DOESHARE products and services described herein, and DOESHARE assumes no liability whatsoever relating to the choice, selection or use of the products and services described herein.

No license, express or implied, by implication or otherwise under any intellectual property rights of DOESHARE.

Resale of DOESHARE products with provisions different from the statements and/or technical features set forth in this document shall immediately void any warranty granted by DOESHARE for the DOESHARE product or service described herein and shall not create or extend in any manner whatsoever, any liability of DOESHARE.

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for Schottky Diodes & Rectifiers category:

Click to view products by Doeshare manufacturer:

Other Similar products are found below:

MA4E2039 MA4E2508M-1112 MBR10100CT-BP MBR1545CT MMBD301M3T5G GS1JE-TP RB160M-50TR BAS16E6433HTMA1
BAS 3010S-02LRH E6327 BAT 54-02LRH E6327 NSR05F40QNXT5G NSVR05F40NXT5G NTE555 JANS1N6640 SB07-03C-TB-H
SK310-T SK33A-TP SK34B-TP SS3003CH-TL-E PDS3100Q-7 GA01SHT18 CRS10I30A(TE85L,QM MA4E2501L-1290
MBRB30H30CT-1G DMJ3940-000 SB007-03C-TB-E SK32A-TP SK33B-TP SK35A-TP SK38B-LTP SK38B-TP NRVBM120LT1G
NTE505 NTSB30U100CT-1G VS-6CWQ10FNHM3 CRG04(T5L,TEMQ) ACDBA1100LR-HF ACDBA1200-HF ACDBA2100-HF
ACDBA240-HF ACDBA3100-HF CDBQC0530L-HF ACDBA260LR-HF ACDBA1100-HF MA4E2502L-1246 10BQ060-M3/5BT
NRVB130LSFT1G CRS08TE85LQM PMAD1108-LF B120Q-13-F