

ESD5Z12V Transient Voltage Suppressors ESD Protection Diode

General description

Silicon Diode in a SOD-523 Plastic Package.

FEATURES

- Stand-off Voltage: 12V
- Low Leakage Current
- Response Time is Typically < 1ns
- IEC61000-4-2 Level 4 ESD Protection
- RoHS Compliant
- Green EMC
- Matte Tin(Sn) Lead Finish
- · Band Indicates Cathode

Absolute Maximum Ratings (T_A = 25°C unless otherwise noted)

Symbol	Parameter	Value	Units
PD	Total Power Dissipation on FR-5 Broad	150	mW
TL	Max Lead Solder Temperature range (10 Second Duration)	260	°C
T_{stg}	Storage Temperature Range	-55 to +150	°C
TJ	Junction Temperature	+150	°C
ESD	IEC61000-4-2 Air Discharge Contact Discharge	±15 ±8	KV
ESD	Per Human Body Model	16	KV

Symbol **Parameter** V_{C} Clamping Voltage @ IPP I_{PP} Peak Pulse Current Breakdown Voltage @ I_⊤ V_{BR} I_{T} **Test Current** I_R Reverse Leakage Current @ V_{RWM} Reverse Standoff Voltage V_{RWM} V_{F} Forward Voltage@ IF Forward Current I_{F}

Green Product




SOD-523 Flat Lead



Device Marking:

Device Type	Marking			
ESD5Z12V	ZM			



V-I characteristics for a uni-directional TVS

Electrical Characteristics (T_A = 25°C unless otherwise noted)

Device Type	Vrwm (Volts)	Ir @ V rwm (μΑ)	V _{BR} @ I _T (Note 2) (Volts)	I _T (mA)	IPP+ (A)	Vc @ Max I _{PP+} (Volts)	P PK+ (W)	C @ V _R = 0V, f = 1MHz (pF)
	Max	Max	Min		Max	Max	Max	Тур.
ESD5Z12V	12	1	13.5	1.0	5	30	95	55

^{*} Surge current waveform per Figure 1.

Note 1: VBR is measured with a pulse test current IT at an ambient temperature of 25°C.



SURGE CURRENT WAVEFORM:


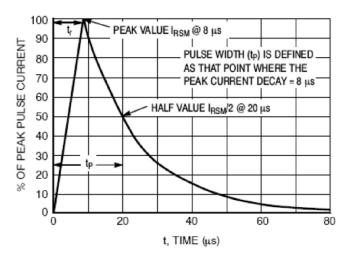


Figure 1. 8 x 20 μs Pulse Waveform

Flat Lead SOD-523 Package Outline



Note: Dimensions are exclusive of Burrs, Mold Flash & Tie Bar extrusions.

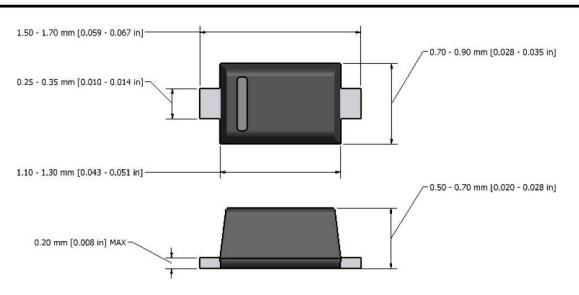

Important Notice and Disclaimer

DOESHARE has used reasonable care in preparing the information included in this document, but DOESHARE does not warrant that such information is error free. DOESHARE assumes no liability whatsoever for any damages incurred by you resulting from errors in or omissions from the information included herein.

DOESHARE no warranty, representation or guarantee regarding the documents, circuits and products specification, DOESHARE reservation rights to make changes for any documents, products, circuits and specifications at any time without notice.

Purchasers are solely responsible for the choice, selection and use of the DOESHARE products and services described herein, and DOESHARE assumes no liability whatsoever relating to the choice, selection or use of the products and services described herein.

No license, express or implied, by implication or otherwise under any intellectual property rights of DOESHARE.

Resale of DOESHARE products with provisions different from the statements and/or technical features set forth in this document shall immediately void any warranty granted by DOESHARE for the DOESHARE product or service described herein and shall not create or extend in any manner whatsoever, any liability of DOESHARE.

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for ESD Suppressors / TVS Diodes category:

Click to view products by Doeshare manufacturer:

Other Similar products are found below:

60KS200C D18V0L1B2LP-7B D5V0F4U5P5-7 NTE4902 P4KE27CA P6KE11CA P6KE39CA-TP P6KE8.2A JANTX1N6053A

SA110CA SA60CA SA64CA SMBJ12CATR SMBJ33CATR SMBJ8.0A ESD105-B1-02EL E6327 ESD112-B1-02EL E6327

ESD5V0L1B02VH6327XTSA1 ESD7451N2T5G 19180-510 CPDT-5V0USP-HF 3.0SMCJ33CA-F 3.0SMCJ36A-F HSPC16701B02TP

JANTX1N6126A JANTX1N6465 USB50805e3/TR7 D3V3Q1B2DLP3-7 D55V0M1B2WS-7 DRTR5V0U4SL-7 SCM1293A-04SO

ESD200-B1-CSP0201 E6327 SM12-7 SM1605E3/TR13 SMLJ45CA-TP CEN955 W/DATA 82350120560 VESD12A1A-HD1-GS08

CPDUR5V0R-HF CPDQC5V0U-HF CPDQC5V0USP-HF CPDQC5V0-HF D1213A-01LP4-7B ESD101-B1-02EL E6327 824500181

MMAD1108/TR13 5KP100A 5KP15A 5KP18A 5KP48A