

MMBT3904

MMBT3904 SOT-23 Plastic-Encapsulate Transistors(NPN)

General description

SOT-23 Plastic-Encapsulate Transistors(NPN)

FEATURES

- Complementary to MMBT3906
- Power Dissipation of 200mW
- High Stability and High Reliability
- SOT-23 Small Outline Plastic Package
- Epoxy UL: 94V-0



DEVICE MARKING CODE:

Device Type	Device Marking
MMBT3904	1AM

Maximum Ratings & Thermal Characteristics (Ratings at 25°C ambient temperature unless otherwise specified.)

Parameters	Symbol	Value	Unit
Collector-Base Voltage	VCBO	60	V
Collector-Emitter Voltage	VCEO	40	V
Emitter -Base Voltage	VEBO	6	V
Collector Current-Continuous	IC	200	mA
Collector Power Dissipation	PC	200	mW
Junction Temperature	Tj	150	°C
Storage Temperature	Tstg	-55-+150	°C
Thermal resistance From junction to ambient	RθJA	625	°C/W

Electrical Characteristics (Ratings at 25°C ambient temperature unless otherwise specified).

Parameter	Symbols	Test Condition	Limits		Unit
			Min	Max	
Collector-base breakdown voltage	V(BR)CBO	IC=10uA, IE=0	60		V
Collector-emitter breakdown voltage	V(BR)CEO	IC=1mA, IB=0	40		V
Emitter-base breakdown voltage	V(BR)EBO	IE=10uA, IC=0	6		V
Collector cut-off current	ICEX	VCE=30V, VEB(off)=3V		50	nA
Collector cut-off current	ICBO	VCB=60V, IE=0		100	nA
Emitter cut-off current	IEBO	VEB=5V, IC=0		100	nA
DC current gain	hFE(1)	VCE=1V, IC=10mA	100	300	
	hFE(2)	VCE=1V, IC=50mA	60		
	hFE(3)	VCE=1V, IC=100mA	30		
Collector-emitter saturation voltage	VCE(sat)	IC=50mA, IB=5mA		0.30	V
Base -emitter saturation voltage	VBE(sat)	IC=50mA, IB=5mA		0.95	V
Transition frequency	fT	VCE=20V, IC=10mA, f=100MHz	300		MHz
Delay time	td	VCC=3V, VBE(off)=-0.5V, IC=10mA, IB1=1mA		35	nS
Rise time	tr	VCC=3V, VBE(off)=-0.5V, IC=10mA, IB1=1mA		35	nS
Storage time	ts	VCC=3V, IC=10mA, IB1=IB2=1mA		200	nS
Fall time	tf	VCC=3V, IC=10mA, IB1=IB2=1mA		50	nS

*Pulse test: pulse width ≤ 300us, duty cycle ≤ 2.0%









MMBT3904

CLASSIFICATION OF hFE(1)

HFE	100-300	
RANK	L	H
RANGE	100-200	200-300


RATING AND CHARACTERISTIC CURVES

Static Characteristic

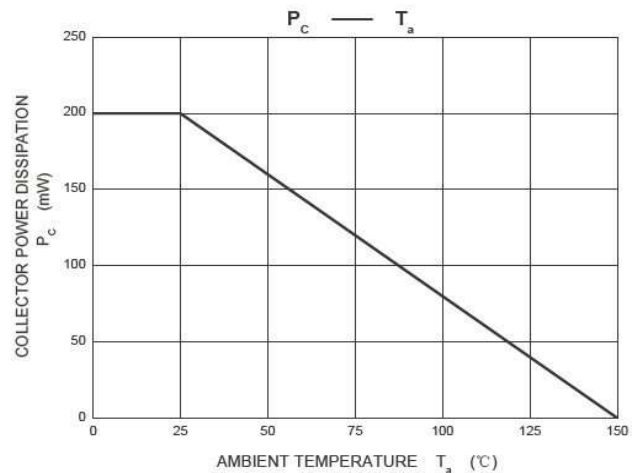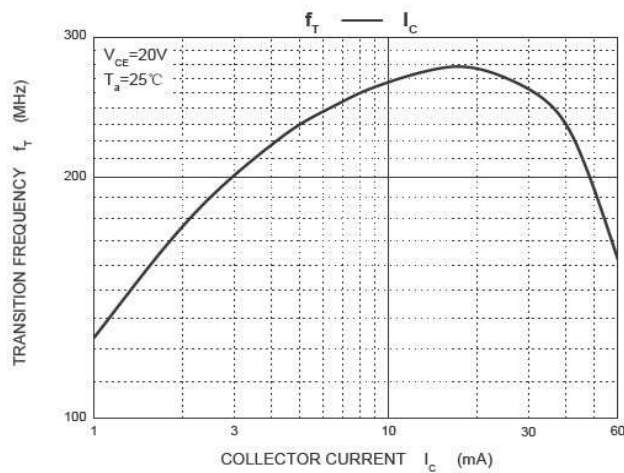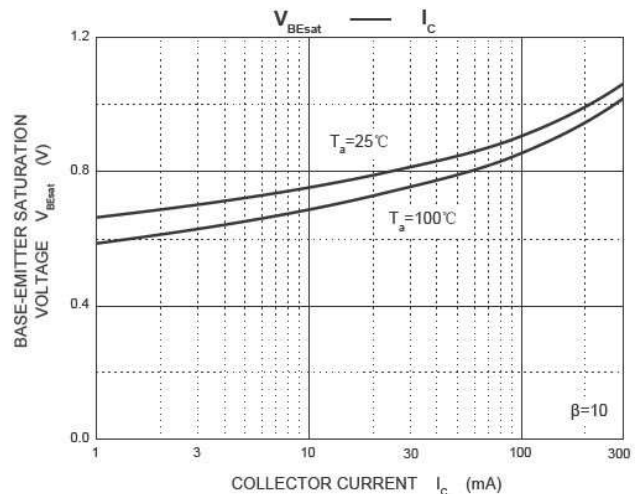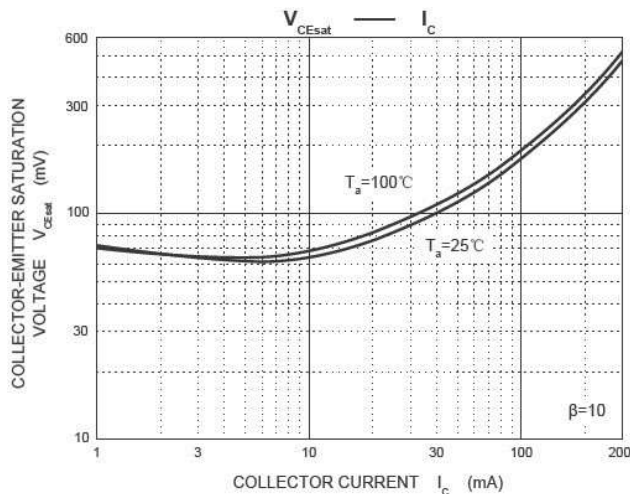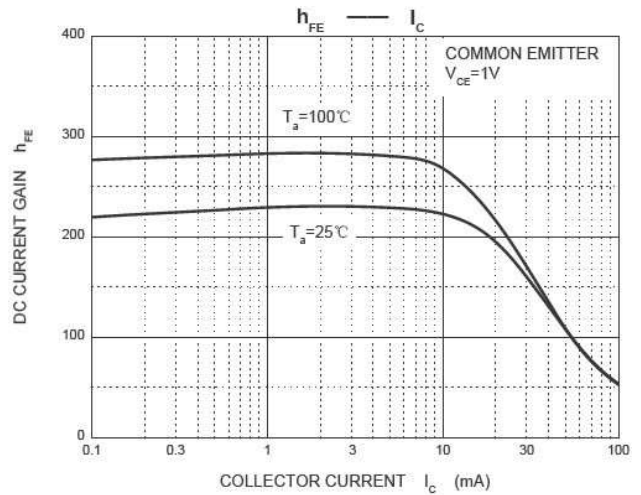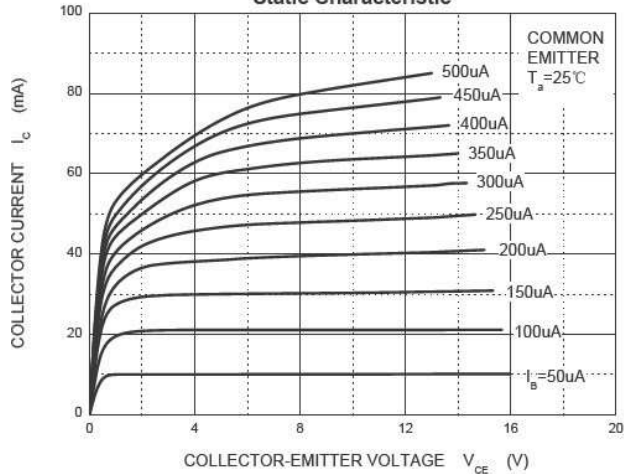

MMBT3904

SOT-23 PACKAGE OUTLINE Plastic surface mounted package

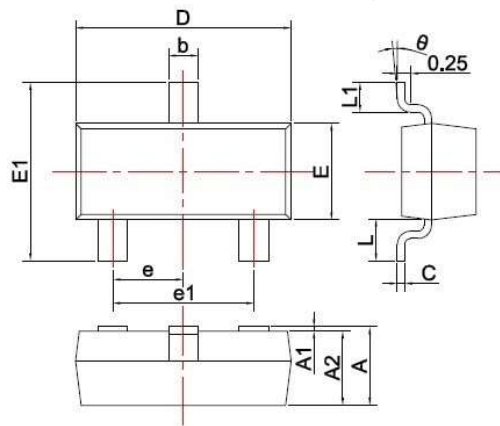


SYMBOL	DIMENSIONS	
	MIN.	MAX.
A	0.900	1.150
A1	0.000	0.100
A2	0.900	1.050
b	0.300	0.500
c	0.080	0.150
D	2.800	3.000
E	1.200	1.400
E1	2.250	2.550
e	0.950TYP	
e1	1.800	2.000
L	0.550REF	
L1	0.300	0.500
θ	0°	8°

Unit: mm

Precautions: PCB Design

Recommended land dimensions for SOT-23 diode. Electrode patterns for PCBs



Note:

1. Controlling dimension: In millimeters.
2. General tolerance: ± 0.05mm.
3. The pad layout is for reference purposes only.

Important Notice and Disclaimer

DOESHARE has used reasonable care in preparing the information included in this document, but DOESHARE does not warrant that such information is error free. DOESHARE assumes no liability whatsoever for any damages incurred by you resulting from errors in or omissions from the information included herein.

DOESHARE no warranty, representation or guarantee regarding the documents, circuits and products specification, DOESHARE reservation rights to make changes for any documents, products, circuits and specifications at any time without notice.

Purchasers are solely responsible for the choice, selection and use of the DOESHARE products and services described herein, and DOESHARE assumes no liability whatsoever relating to the choice, selection or use of the products and services described herein.

No license, express or implied, by implication or otherwise under any intellectual property rights of DOESHARE.

Resale of DOESHARE products with provisions different from the statements and/or technical features set forth in this document shall immediately void any warranty granted by DOESHARE for the DOESHARE product or service described herein and shall not create or extend in any manner whatsoever, any liability of DOESHARE.

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Bipolar Transistors - BJT category](#):

Click to view products by [Doeshare manufacturer](#):

Other Similar products are found below :

[619691C](#) [MCH4017-TL-H](#) [MMBT-2369-TR](#) [BC546/116](#) [BC557/116](#) [BSW67A](#) [NJVMJD148T4G](#) [NTE123AP-10](#) [NTE153MCP](#) [NTE16](#)
[NTE195A](#) [NTE92](#) [C4460](#) [2N4401-A](#) [2N6728](#) [2SA1419T-TD-H](#) [2SA2126-E](#) [2SB1204S-TL-E](#) [2SC2712S-GR,LF](#) [2SC5488A-TL-H](#)
[2SD2150T100R](#) [SP000011176](#) [2N2907A](#) [2N3904-NS](#) [2N5769](#) [2SC2412KT146S](#) [2SD1816S-TL-E](#) [CPH6501-TL-E](#) [MCH4021-TL-E](#)
[MJE340](#) [US6T6TR](#) [NJL0281DG](#) [732314D](#) [CPH3121-TL-E](#) [CPH6021-TL-H](#) [873787E](#) [IMZ2AT108](#) [UMX21NTR](#) [MCH6102-TL-E](#) [FP204-](#)
[TL-E](#) [NJL0302DG](#) [2N3583](#) [2SA2014-TD-E](#) [2SC2812-5-TB-E](#) [30A02MH-TL-E](#) [TN6717A](#) [NSV40301MZ4T1G](#) [NTE13](#) [NTE26](#) [NTE282](#)