SS32 THUR SS310



SS32 THUR SS310 Schottky Barrier Rectifiers

General description


3.0Amp Surface Mounted Schottky Barrier Rectifiers

FEATURES

- Flammability Classification 94V-O
- Plastic package has Underwriters Laboratory
- For surface mounted applications
- · Built-in strain relief
- · High surge capacity

MECHANICAL DATA

- Case: JEDEC DO-214AB molded plastic
- Terminals: Solder plated, solderable per MIL-STD-750 Method 2026
- Polarity: Color band denotes cathodeWeight: 0.007 ounce, 0.25 gram



Unit: inch (mm)

Maximum Ratings And Electrical Characteristics


Characteristic	Symbol	SS32	SS33	SS34	SS35	SS36	SS38	SS39	SS310	Unit
Marking Code	Mark	SS32	SS33	SS34	SS35	SS36	SS38	SS39	SS310	N/A
Peak Repetitive Reverse Voltage Working Peak Reverse Voltage DC Blocking Voltage	VRRM VRWM VR	20	30	40	50	60	80	90	100	V
RMS Reverse Voltage	VR(RMS)	14	21	28	35	42	56	64	70	V
Average Rectified Output Current	Io	3.0								Α
Non-Repetitive Peak Forward Surge Current 8.3ms Single half sine-wave superimposed on rated load (JEDEC Method)	Ігѕм	100								Α
Forward Voltage @I _F = 5.0A	V FM	0.45 0.55 0.6 0.7 0.85					V			
Peak Reverse Current @T _A = 25°C At Rated DC Blocking Voltage @T _A = 100°C	lгм	0.5 20								mA
Typical Thermal Resistance Junction to Ambient (Note 1)	RJA	55								K/W
Typical junction capacitance	Cı	500				350				pF
Operating Temperature Range	Tj	-55 to +150								°C
Storage Temperature Range	Тѕтс	-55 to +150								°C


Note: 1.Measured at 1.0 MHz and applied reverse voltage of 4.0V DC


2. Thermal resistance junction to ambient




Rating And Characteristic Curves

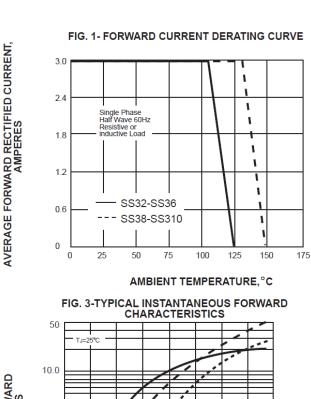









PERCENT OF PEAK REVERSE VOLTAGE,%



INSTANTANEOUS FORWARD VOLEAGE,



t,PULSE DURATION,sec.

1.0

10

REVERSE VOLTAGE, VOLTS

100

0.1



Important Notice and Disclaimer

DOESHARE has used reasonable care in preparing the information included in this document, but DOESHARE does not warrant that such information is error free. DOESHARE assumes no liability whatsoever for any damages incurred by you resulting from errors in or omissions from the information included herein.

DOESHARE no warranty, representation or guarantee regarding the documents, circuits and products specification, DOESHARE reservation rights to make changes for any documents, products, circuits and specifications at any time without notice.

Purchasers are solely responsible for the choice, selection and use of the DOESHARE products and services described herein, and DOESHARE assumes no liability whatsoever relating to the choice, selection or use of the products and services described herein.

No license, express or implied, by implication or otherwise under any intellectual property rights of DOESHARE.

Resale of DOESHARE products with provisions different from the statements and/or technical features set forth in this document shall immediately void any warranty granted by DOESHARE for the DOESHARE product or service described herein and shall not create or extend in any manner whatsoever, any liability of DOESHARE.

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for Schottky Diodes & Rectifiers category:

Click to view products by Doeshare manufacturer:

Other Similar products are found below:

MA4E2039 MMBD301M3T5G RB160M-50TR D83C BAS16E6433HTMA1 BAS 3010S-02LRH E6327 BAT 54-02LRH E6327

NRVBAF360T3G NSR05F40QNXT5G NTE555 JANS1N6640 SS3003CH-TL-E GA01SHT18 CRS10I30A(TE85L,QM MBRA140TRPBF

MBRB30H30CT-1G BAT 15-04R E6152 JANTX1N5712-1 DMJ3940-000 SB007-03C-TB-E NRVBB20100CTT4G NRVBM120LT1G

NTSB30U100CT-1G CRG04(T5L,TEMQ) ACDBA1100LR-HF ACDBA1200-HF ACDBA240-HF ACDBA3100-HF CDBQC0530L-HF

ACDBA260LR-HF ACDBA1100-HF 10BQ015-M3/5BT NRVBM120ET1G VSSB410S-M3/5BT 1N5819T-G PDS1040Q-13 B160BQ-13-F

SDM05U20CSP-7 BAS 70-07 E6433 B140S1F-7 HSM560Je3/TR13 DDB2265-000 ZHCS506QTA HSM190Je3/TR13 B330AF-13

ACDBUC0230-HF SDM1U100S1F-7 MBR10200CTF-G1 CDLL5712 DMF2822-000