



### ■ Features

- Fast Switching Device (TRR <4.0 nS)
- Power Dissipation of 500mW
- High Stability and High Reliability
- Low reverse leakage

### ■ Applications


- For General Purpose Switching Applications

### ■ Mechanical Data

- package:SOD-123
- Polarity: Color band denotes cathode end
- Flammability rating of epoxy resin: UL 94V-0
- Mounting Position: Any.

### ■ Ordering Information

Part Number	Package	Marking	Packing	Quantity per reel	Reel Size
1N4148W	SOD-123	T4	Tape & Reel	3,000 PCS	7 inches

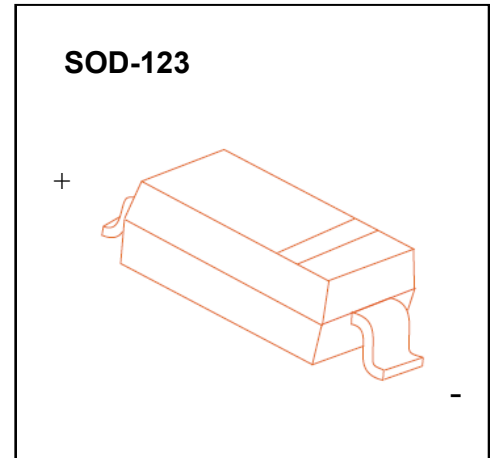

**Maximum Ratings & Thermal Characteristics**(Ratings at 25 °C ambient temperature unless otherwise specified.)

Parameters	Symbol	Value	Unit
Peak Reverse Voltage	$V_{RM}$	100	V
Power Dissipation	$P_d$	500	mW
Operating junction temperature	$T_j$	150	°C
Storage temperature range	$T_{STG}$	-65-+150	°C
Thermal Resistance from Junction to Ambient	$R_{\theta JA}$	250	°C/W
Average Rectified Current	$I_o$	150	mA
Non-repetitive Peak Forward Current	$I_{FM}$	300	mA
Peak Forward Surge Current @ $t_p=1\mu s$ ; $T_A=25^\circ C$	$I_{FSM}$	2.0	A

Valid provided that electrodes are kept at ambient temperature.


**Electrical Characteristics**(Ratings at 25 °C ambient temperature unless otherwise specified)

Symbols	Parameter	Test Condition	Limits		Unit
			Min	Max	
<b>BV</b>	Breakdown Voltage	$I_R=100\mu A$	100		V
<b>IR</b>	Reverse Leakage Current	$V_R=20V$	---	25	nA
		$V_R=20V T_j=150^\circ C$	---	50	$\mu A$
		$V_R=75$	---	5	$\mu A$
<b>VF</b>	Forward Voltage	$I_F=10mA$	---	1.00	V
		$I_F=100mA$	---	1.25	
<b>TRR</b>	Reverse Recovery Time	$I_F = I_R = 10mA,$	---	4	nS
		$I_{rr}=0.1X I_R$			
		$R_L=100\Omega$			
<b>C</b>	Capacitance	$V_R=0V, f=1MHZ$	---	4	pF




### Typical Characteristics


Forward characteristics

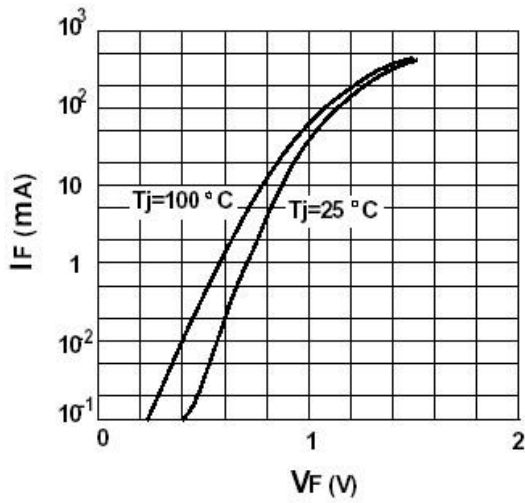


Admissible power dissipation versus ambient temperature

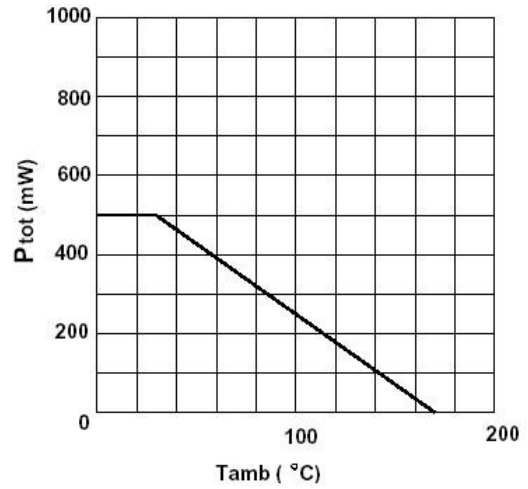


Leakage current versus junction temperature

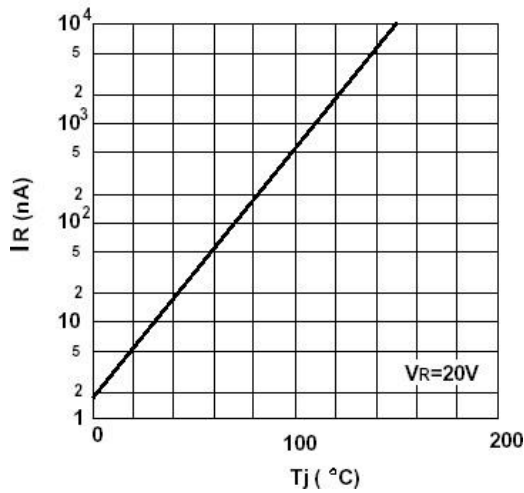

Reverse capacitance VS. reverse voltage

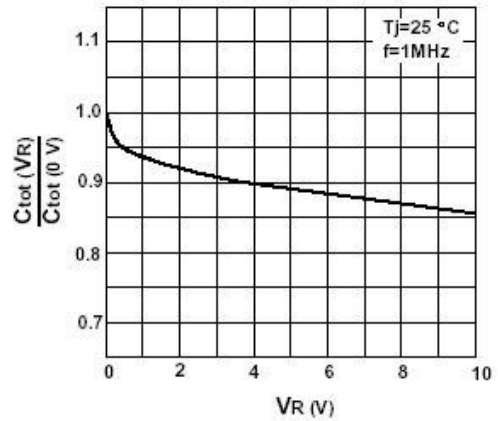


Admissible repetitive peak forward current VS. pulse duration

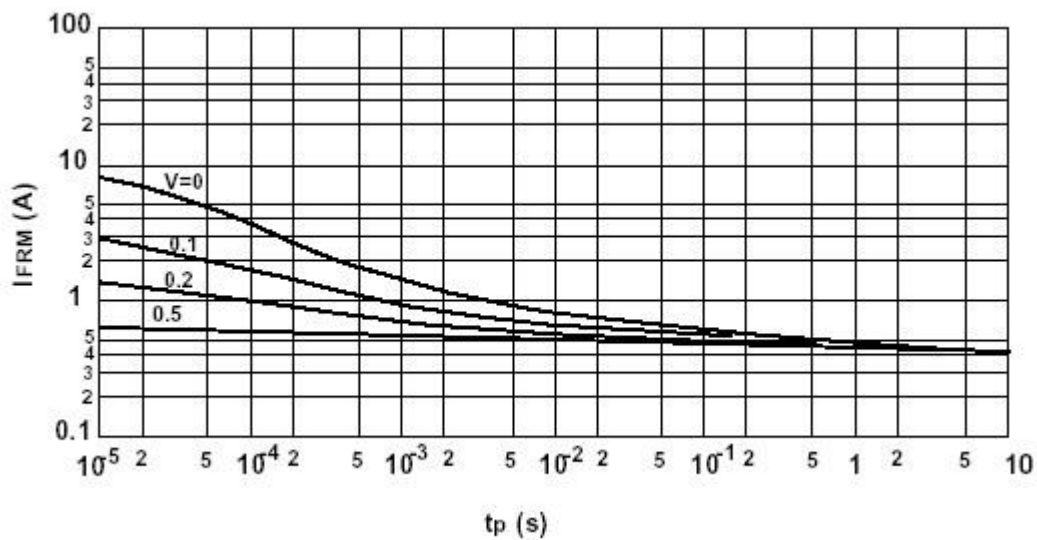



■ SOD-123 Package Outline Dimensions

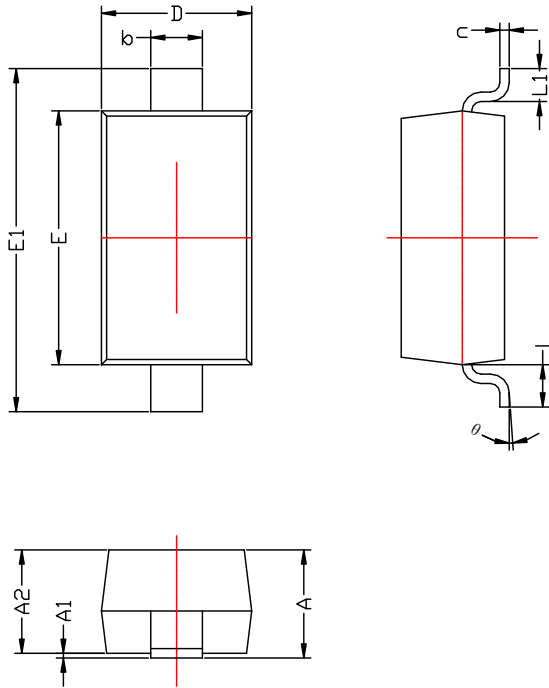

Symbol	Dimensions	
	MIN	MAX
A	1.050	1.250
A1	0.000	0.100
A2	1.050	1.150
b	0.450	0.650
c	0.080	0.150
D	1.500	1.700
E	2.600	2.800
E1	3.550	3.850
L	0.500REF	
L1	0.250	0.450
$\theta$	0°	8°

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Diodes - General Purpose, Power, Switching category](#):*

*Click to view products by [DOWO manufacturer](#):*

Other Similar products are found below :

[MMBD3004S-13-F](#) [1N3611](#) [NTE156A](#) [NTE6244](#) [1SS400CST2RA](#) [SDAA13](#) [SHN2D02FUTW1T1G](#) [1N4449](#) [1N456A](#) [1N914BTR](#)  
[D291S45T](#) [BAS 16-02L E6327](#) [BAS 16-02V H6327](#) [BAS 21U E6327](#) [BAS 28 E6327](#) [BAW56DWQ-7-F](#) [BAW75-TAP](#) [MM230L-CAA](#)  
[IDW40E65D1](#) [JAN1N3600](#) [JAN1N4454UR-1](#) [SMMSD4148T3G](#) [BYW95B/A52A](#) [NSVDAN222T1G](#) [CDSZC01100-HF](#) [BAV70HDW-7](#)  
[BAS28-7](#) [JANTX1N6640](#) [BAW56HDW-13](#) [BAS28 TR](#) [VS-HFA04SD60STR-M3](#) [1SS388-TP](#) [BAV99TQ-13-F](#) [BAV99HDW-13](#) [1N4004](#)  
[MMDB30-E28X](#) [LS4148](#) [IDV15E65D2](#) [W0503RH200S0L](#) [W0503SH200S0L](#) [M0268SJ200NLF](#) [M0268RJ200NLF](#) [S3MBF](#) [US1J](#)  
[DAN217U-TP](#) [SHV-06JNS-Q](#) [IDW30C65D1](#) [IDW80C65D1](#) [VS-HFA30TA60CSR-M3](#) [M1MA152WAT1](#)