

Breakdown Voltage: 6.8 to 600 V

Peak Pulse Power: 600 W

Surface Mount Transient Voltage Suppressors



Features

- Glass passivated chip
- 600 W peak pulse power capability with a 10/1000 μ s waveform, repetitive rate (duty cycle):0.01 %
- Low leakage
- Uni and Bidirectional unit
- Excellent clamping capability
- Very fast response time
- RoHS compliant

Mechanical Data

- Case: Molded plastic
- Epoxy: UL 94V-0 rate flame retardant
- Lead: Solderable per MIL-STD-750, method 2026
- Polarity: Color band denotes cathode end except Bipolar
- Mounting position: Any

SMB/ DO-214AA

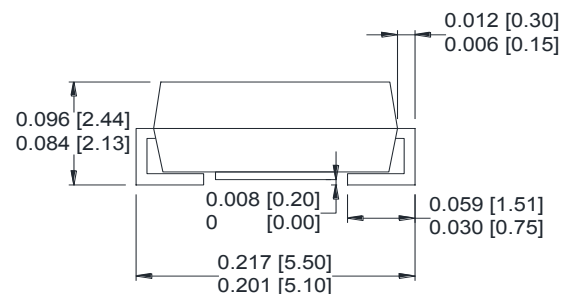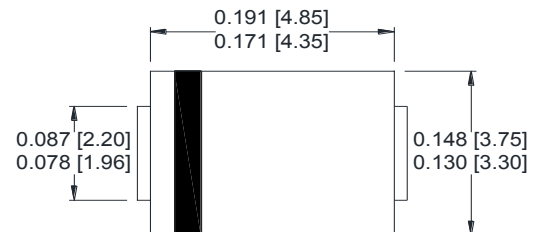

Dimensions: inch[mm]

Maximum Ratings($T_A=25^\circ\text{C}$ unless otherwise noted)

| Parameter | Symbol | Value | Unit |
|---|----------------|----------------|------------------|
| Peak power dissipation with a 10/1000 μ s waveform ⁽¹⁾ | P_{PP} | 600 | W |
| Peak pulse current with a 10/1000 μ s waveform ⁽¹⁾ | I_{PP} | See Next Table | A |
| Power dissipation on infinite heatsink at $T_L = 75^\circ\text{C}$ | P_D | 5.0 | W |
| Peak forward surge current, 8.3 ms single half sine-wave unidirectional only ⁽²⁾ | I_{FSM} | 100 | A |
| Maximum instantaneous forward voltage at 25 A for unidirectional only ⁽³⁾ | V_F | 3.5/5.0 | V |
| Operating junction and storage temperature range | T_J, T_{STG} | - 55 to +150 | $^\circ\text{C}$ |

Note:

(1)Non-repetitive current pulse per Fig.5 and derated above $T_A=25^\circ\text{C}$ per Fig.1

(2)Measured on 8.3 ms single half sine-wave or equivalent square wave, duty cycle = 4 pulses per minute maximum

(3) $V_F < 3.5\text{V}$ for devices of $V_{BR} < 200\text{V}$ and $V_F < 5.0\text{V}$ for devices of $V_{BR} > 201\text{V}$



Ratings and Characteristics Curves ($T_A=25^\circ\text{C}$ unless otherwise noted)

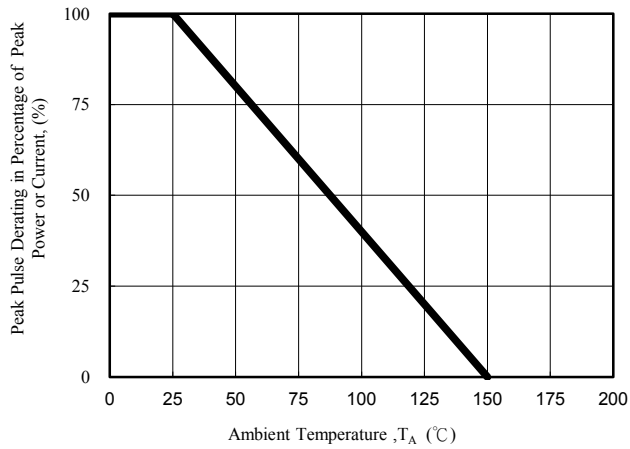


Fig. 1 - Pulse Derating Curve

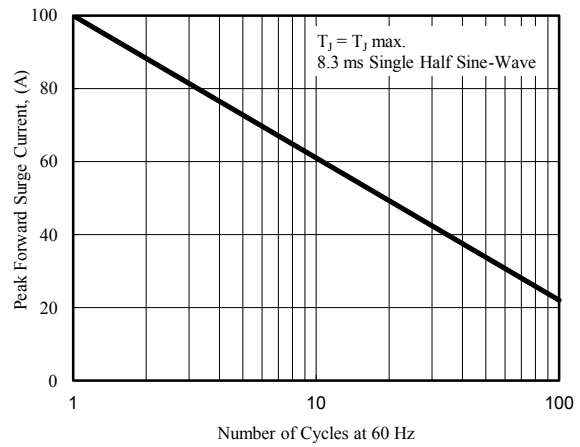


Fig. 2 - Maximum Non-Repetitive Surge Current

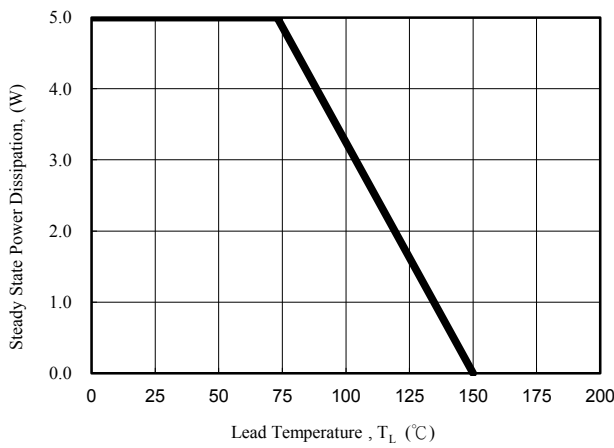


Fig. 3 - Steady State Power Derating Curve

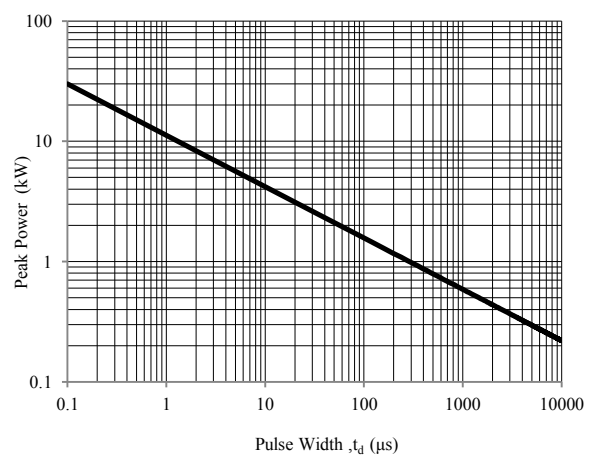


Fig. 4 - Peak Pulse Power Rating Curve

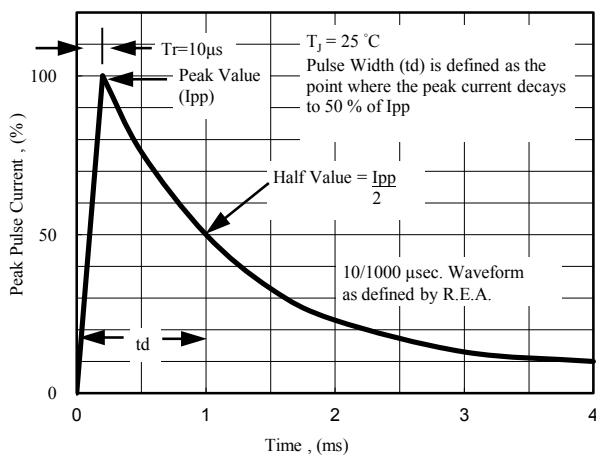


Fig. 5 - Pulse Waveform

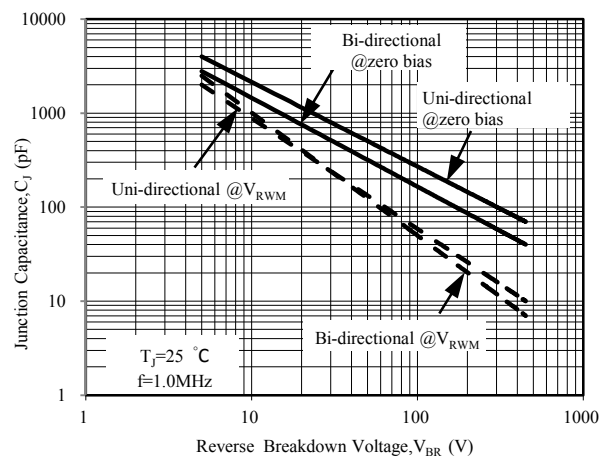


Fig. 6 - Typical Junction Capacitance

Electrical Characteristics($T_A=25^{\circ}\text{C}$ unless otherwise noted)

| Part Number (Uni) | Part Number (Bi) | Device Marking Code | | Breakdown Voltage V_{BR} @ I_T | | | Maximum Reverse Leakage I_R @ V_{RWM} (uA) | Working Peak Reverse Voltage V_{RWM} (V) | Maximum Reverse Surge Current I_{PP} (A) | Maximum Clamping Voltage V_C @ I_{PP} (V) |
|-------------------|------------------|---------------------|------|------------------------------------|---------|------------|--|--|--|---|
| | | Uni | Bi | Min (V) | Max (V) | I_T (mA) | | | | |
| P6SMB6.8A | P6SMB6.8CA | 6V8A | 6V8C | 6.46 | 7.14 | 10 | 1000 | 5.8 | 57.14 | 10.5 |
| P6SMB7.5A | P6SMB7.5CA | 7V5A | 7V5C | 7.13 | 7.88 | 10 | 500 | 6.4 | 53.10 | 11.3 |
| P6SMB8.2A | P6SMB8.2CA | 8V2A | 8V2C | 7.79 | 8.61 | 10 | 200 | 7.0 | 49.59 | 12.1 |
| P6SMB9.1A | P6SMB9.1CA | 9V1A | 9V1C | 8.65 | 9.56 | 1 | 50 | 7.8 | 44.78 | 13.4 |
| P6SMB10A | P6SMB10CA | 10A | 10C | 9.50 | 10.50 | 1 | 10 | 8.6 | 41.38 | 14.5 |
| P6SMB11A | P6SMB11CA | 11A | 11C | 10.45 | 11.55 | 1 | 5 | 9.4 | 38.46 | 15.6 |
| P6SMB12A | P6SMB12CA | 12A | 12C | 11.40 | 12.60 | 1 | 5 | 10.2 | 35.93 | 16.7 |
| P6SMB13A | P6SMB13CA | 13A | 13C | 12.35 | 13.65 | 1 | 1 | 11.1 | 32.97 | 18.2 |
| P6SMB15A | P6SMB15CA | 15A | 15C | 14.25 | 15.75 | 1 | 1 | 12.8 | 28.30 | 21.2 |
| P6SMB16A | P6SMB16CA | 16A | 16C | 15.20 | 16.80 | 1 | 1 | 13.6 | 26.67 | 22.5 |
| P6SMB18A | P6SMB18CA | 18A | 18C | 17.10 | 18.90 | 1 | 1 | 15.3 | 23.81 | 25.2 |
| P6SMB20A | P6SMB20CA | 20A | 20C | 19.00 | 21.00 | 1 | 1 | 17.1 | 21.66 | 27.7 |
| P6SMB22A | P6SMB22CA | 22A | 22C | 20.90 | 23.10 | 1 | 1 | 18.8 | 19.61 | 30.6 |
| P6SMB24A | P6SMB24CA | 24A | 24C | 22.80 | 25.20 | 1 | 1 | 20.5 | 18.07 | 33.2 |
| P6SMB27A | P6SMB27CA | 27A | 27C | 25.65 | 28.35 | 1 | 1 | 23.1 | 16.00 | 37.5 |
| P6SMB30A | P6SMB30CA | 30A | 30C | 28.50 | 31.50 | 1 | 1 | 25.6 | 14.49 | 41.4 |
| P6SMB33A | P6SMB33CA | 33A | 33C | 31.35 | 34.65 | 1 | 1 | 28.2 | 13.13 | 45.7 |
| P6SMB36A | P6SMB36CA | 36A | 36C | 34.20 | 37.80 | 1 | 1 | 30.8 | 12.02 | 49.9 |
| P6SMB39A | P6SMB39CA | 39A | 39C | 37.05 | 40.95 | 1 | 1 | 33.3 | 11.13 | 53.9 |
| P6SMB43A | P6SMB43CA | 43A | 43C | 40.85 | 45.15 | 1 | 1 | 36.8 | 10.12 | 59.3 |
| P6SMB47A | P6SMB47CA | 47A | 47C | 44.65 | 49.35 | 1 | 1 | 40.2 | 9.26 | 64.8 |
| P6SMB51A | P6SMB51CA | 51A | 51C | 48.45 | 53.55 | 1 | 1 | 43.6 | 8.56 | 70.1 |
| P6SMB56A | P6SMB56CA | 56A | 56C | 53.20 | 58.80 | 1 | 1 | 47.8 | 7.79 | 77.0 |
| P6SMB62A | P6SMB62CA | 62A | 62C | 58.90 | 65.10 | 1 | 1 | 53.0 | 7.06 | 85.0 |
| P6SMB68A | P6SMB68CA | 68A | 68C | 64.60 | 71.40 | 1 | 1 | 58.1 | 6.52 | 92.0 |
| P6SMB75A | P6SMB75CA | 75A | 75C | 71.25 | 78.75 | 1 | 1 | 64.1 | 5.83 | 103.0 |
| P6SMB82A | P6SMB82CA | 82A | 82C | 77.90 | 86.10 | 1 | 1 | 70.1 | 5.31 | 113.0 |
| P6SMB91A | P6SMB91CA | 91A | 91C | 86.45 | 95.55 | 1 | 1 | 77.8 | 4.80 | 125.0 |
| P6SMB100A | P6SMB100CA | 100A | 100C | 95.00 | 105.00 | 1 | 1 | 85.5 | 4.38 | 137.0 |
| P6SMB110A | P6SMB110CA | 110A | 110C | 104.50 | 115.50 | 1 | 1 | 94.0 | 3.95 | 152.0 |
| P6SMB120A | P6SMB120CA | 120A | 120C | 114.00 | 126.00 | 1 | 1 | 102.0 | 3.64 | 165.0 |
| P6SMB130A | P6SMB130CA | 130A | 130C | 123.50 | 136.50 | 1 | 1 | 111.0 | 3.35 | 179.0 |
| P6SMB150A | P6SMB150CA | 150A | 150C | 142.50 | 157.50 | 1 | 1 | 128.0 | 2.90 | 207.0 |
| P6SMB160A | P6SMB160CA | 160A | 160C | 152.00 | 168.00 | 1 | 1 | 136.0 | 2.74 | 219.0 |
| P6SMB170A | P6SMB170CA | 170A | 170C | 161.50 | 178.50 | 1 | 1 | 145.0 | 2.56 | 234.0 |
| P6SMB180A | P6SMB180CA | 180A | 180C | 171.00 | 189.00 | 1 | 1 | 154.0 | 2.44 | 246.0 |
| P6SMB200A | P6SMB200CA | 200A | 200C | 190.00 | 210.00 | 1 | 1 | 171.0 | 2.19 | 274.0 |
| P6SMB220A | P6SMB220CA | 220A | 220C | 209.00 | 231.00 | 1 | 1 | 185.0 | 1.83 | 328.0 |
| P6SMB250A | P6SMB250CA | 250A | 250C | 237.50 | 262.50 | 1 | 1 | 214.0 | 1.74 | 344.0 |
| P6SMB300A | P6SMB300CA | 300A | 300C | 285.00 | 315.00 | 1 | 1 | 256.0 | 1.45 | 414.0 |
| P6SMB350A | P6SMB350CA | 350A | 350C | 332.50 | 367.50 | 1 | 1 | 299.3 | 1.24 | 482.0 |
| P6SMB380A | P6SMB380CA | 380A | 380C | 361.00 | 399.00 | 1 | 1 | 324.9 | 1.14 | 524.4 |
| P6SMB400A | P6SMB400CA | 400A | 400C | 380.00 | 420.00 | 1 | 1 | 342.0 | 1.09 | 548.0 |
| P6SMB440A | P6SMB440CA | 440A | 440C | 418.00 | 462.00 | 1 | 1 | 376.2 | 0.99 | 607.2 |
| P6SMB500A | P6SMB500CA | 500A | 500C | 475.00 | 525.00 | 1 | 1 | 427.5 | 0.87 | 690.0 |
| P6SMB520A | P6SMB520CA | 520A | 520C | 494.00 | 546.00 | 1 | 1 | 444.6 | 0.84 | 717.6 |
| P6SMB550A | P6SMB550CA | 550A | 550C | 522.50 | 577.50 | 1 | 1 | 470.3 | 0.79 | 759.0 |
| P6SMB600A | P6SMB600CA | 600A | 600C | 570.00 | 630.00 | 1 | 1 | 513.0 | 0.72 | 828.0 |

Note:

1. The available parts are "A" type only, the parts without A (V_{BR} is $\pm 10\%$) is not available
2. Add suffix 'C' or 'CA' after part number to specify Bi-directional devices
3. For Bi-Directional devices having V_R of 10 volts and under, the I_R limit is double

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [ESD Suppressors / TVS Diodes](#) category:

Click to view products by [DOWO](#) manufacturer:

Other Similar products are found below :

[60KS200C](#) [D18V0L1B2LP-7B](#) [D5V0F4U5P5-7](#) [NTE4902](#) [P4KE27CA](#) [P6KE11CA](#) [P6KE39CA-TP](#) [P6KE8.2A](#) [JANTX1N6053A](#)
[SA110CA](#) [SA60CA](#) [SA64CA](#) [SMBJ12CATR](#) [SMBJ33CATR](#) [SMBJ8.0A](#) [ESD105-B1-02EL E6327](#) [ESD112-B1-02EL E6327](#)
[ESD5V0L1B02VH6327XTSA1](#) [ESD7451N2T5G](#) [19180-510](#) [CPDT-5V0USP-HF](#) [3.0SMCJ33CA-F](#) [3.0SMCJ36A-F](#) [HSPC16701B02TP](#)
[JANTX1N6126A](#) [JANTX1N6465](#) [USB50805e3/TR7](#) [D3V3Q1B2DLP3-7](#) [D55V0M1B2WS-7](#) [DRTR5V0U4SL-7](#) [SCM1293A-04SO](#)
[ESD200-B1-CSP0201 E6327](#) [SM12-7](#) [SM1605E3/TR13](#) [SMLJ45CA-TP](#) [CEN955 W/DATA](#) [82350120560](#) [VESD12A1A-HD1-GS08](#)
[CPDUR5V0R-HF](#) [CPDQC5V0U-HF](#) [CPDQC5V0USP-HF](#) [CPDQC5V0-HF](#) [D1213A-01LP4-7B](#) [ESD101-B1-02EL E6327](#) [824500181](#)
[MMAD1108/TR13](#) [5KP100A](#) [5KP15A](#) [5KP18A](#) [5KP48A](#)