



Features

- Bi-directional ESD protection of one lines
- 40Watts peak pulse power (tp = 8/20μs)
- Working voltage: 3.3V
- Junction Capacitance: 0.22pF(Typ)
- Low leakage current
- IEC 61000-4-2 ±15kV contact ±20kV air
- IEC 61000-4-5 (Lightning) 6A (8/20μs)


Applications

- USB3.0 and USB3.1
- Ultra-high-speed data lines
- Sensitive interfaces lines
- Notebooks, Desktops, and Servers
- Portable instrumentation

Mechanical Data

- Package:DFN0603-2L
- Molding compound flammability rating: UL 94V-0
- RoHS/WEEE Compliant

Schematic & PIN Configuration



Ordering Information

Part Number	Package	Marking	Packing	Reel Size
PESD4V0Y1BSFYL	DFN0603-2L	C9	10000 Tape & Reel	7 inches

Absolute Maximum Rating($T_A=25^{\circ}\text{C}$ unless otherwise Specified)


Parameter	Symbol	Value	Unit
Peak Pulse Power ($t_p = 8/20\mu\text{s}$)	PPP	40	Watts
Peak Pulse Current ($t_p = 8/20\mu\text{s}$) (Note1)	I_{pp}	6	A
ESD per IEC 61000-4-2 (Air) ESD per IEC 61000-4-2 (Contact)	V_{ESD}	20 15	kV
Lead Soldering Temperature	T_L	260(10seconds)	$^{\circ}\text{C}$
Junction Temperature	T_J	-55 to +125	$^{\circ}\text{C}$
Storage Temperature Range	T_{stg}	-55 to +125	$^{\circ}\text{C}$

Electrical Characteristics($T_A=25^{\circ}\text{C}$ unless otherwise Specified)

Parameter	Symbol	Test Condition	Min	Typ	Max	Unit
Reverse Working Voltage	V_{RWM}				3.3	V
Breakdown Voltage	V_{BR}	$I_T = 1\text{mA}$	4.0	7.8		V
Reverse Leakage Current	I_R	$V_{RWM}=3.3\text{V}$		5	200	nA
Holding Voltage	V_H	$I_H=50\text{mA}$	0		0	V
Clamping Voltage	V_C	$I_{PP}=6\text{A}, t_p=8/20\mu\text{s}$		5.5	6.5	V
Clamping Voltage	V_C	$I_{TLP}=4\text{A}, t_p=0.2/100\text{ns}$		5.8		V
Clamping Voltage	V_C	$I_{TLP}=16\text{A}, t_p=0.2/100\text{ns}$		9.4	11.8	V
ESD Dynamic Resistance	R_{DYN}	$TLP=0.2/100\text{ns}$		0.3	0.5	Ω
Junction Capacitance	C_J	Between I/O; $V_R=0\text{V}$; $f=1\text{MHz}$		0.22	0.32	pF




Electrical Parameters ($T_A = 25^\circ\text{C}$ unless otherwise noted)

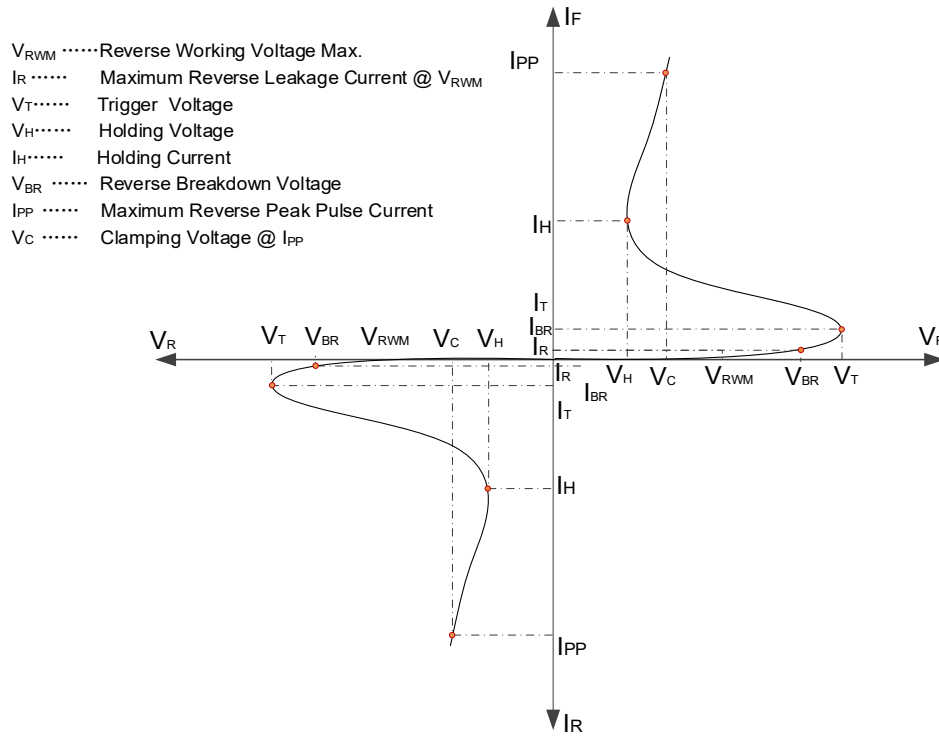






Typical Characteristics ($T_A = 25^\circ\text{C}$ unless otherwise Specified)

Capacitance vs. Reverse Voltage

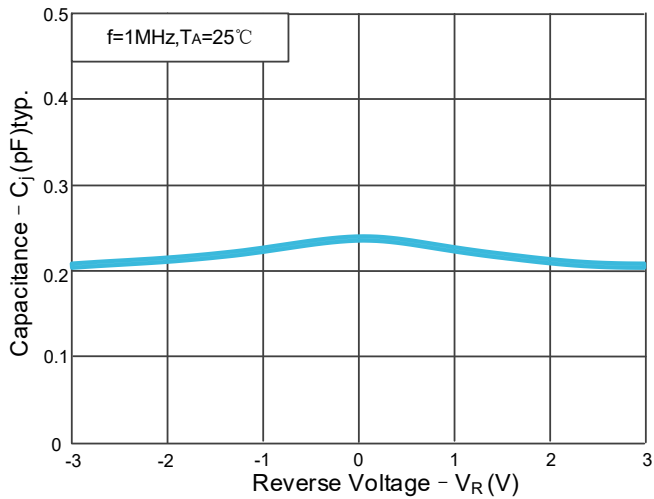


Reverse Clamping Voltage vs. Peak Pulse Current

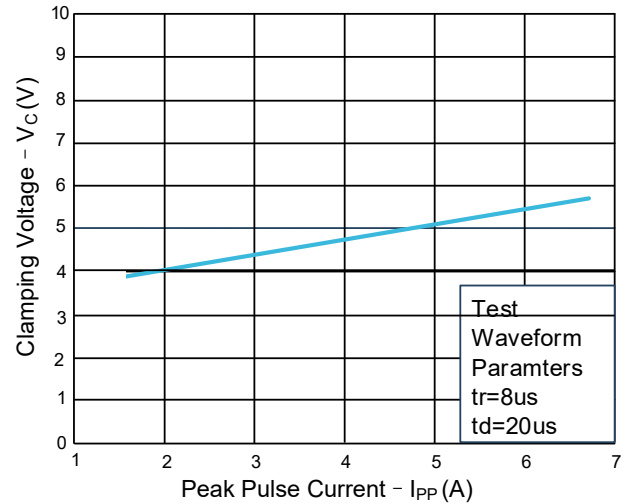


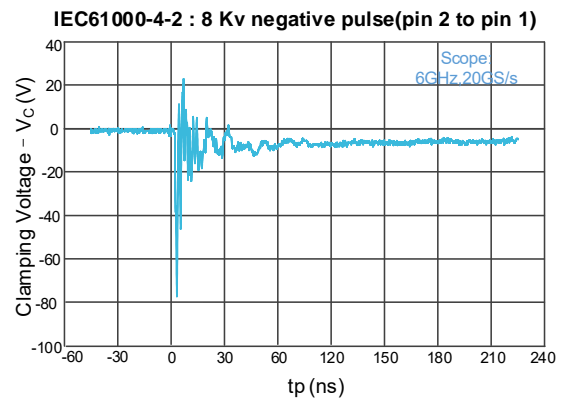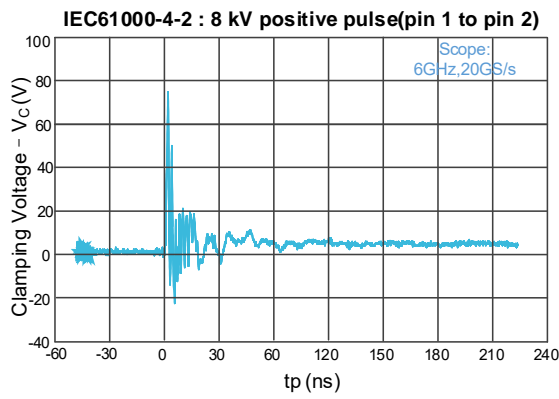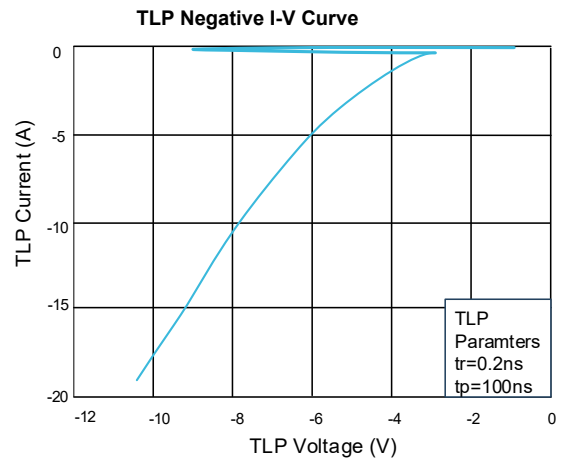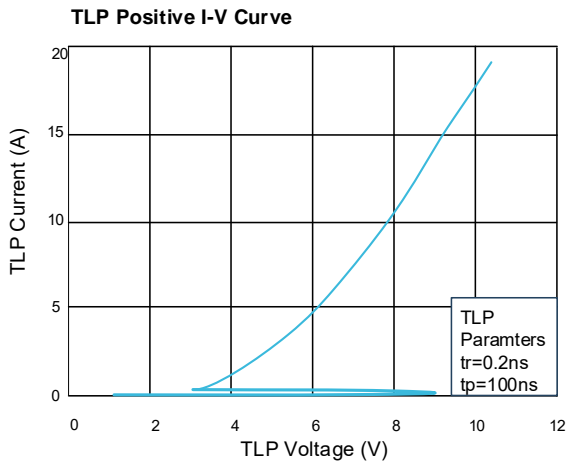


Outline Drawing – DFN0603

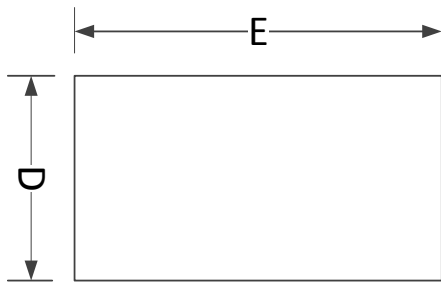

TOP VIEW

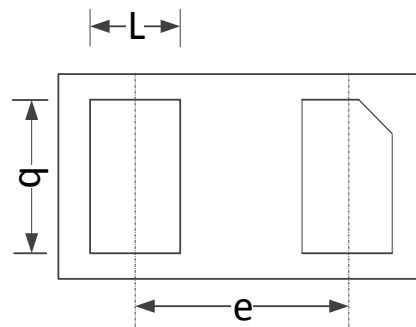

BOTTOM VIEW

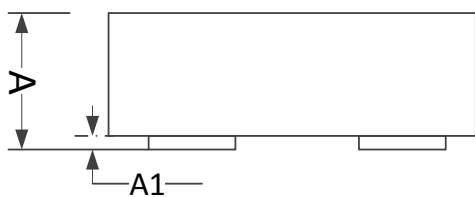

SIDE VIEW

COMMON DIMENSION (MM)			
PKG	DFN0603		
REF.	MIN.	NOM.	MAX.
A	0.28	0.30	0.34
A1	0.00	0.02	0.05
b	0.21	0.23	0.265
L	0.14		0.24
e	0.40BSC		
D	0.25	0.30	0.35
E	0.55	0.60	0.65

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [ESD Suppressors / TVS Diodes](#) category:

Click to view products by [DOWO](#) manufacturer:

Other Similar products are found below :

[60KS200C](#) [D18V0L1B2LP-7B](#) [D5V0F4U5P5-7](#) [NTE4902](#) [P4KE27CA](#) [P6KE11CA](#) [P6KE8.2A](#) [JANTX1N6053A](#) [SA60CA](#) [SA64CA](#)
[SMBJ12CATR](#) [SMBJ33CATR](#) [SMBJ6.5A](#) [SMBJ8.0A](#) [ESD101-B1-02ELS E6327](#) [ESD112-B1-02EL E6327](#) [ESD7451N2T5G](#) [19180-510](#)
[CPDT-5V0USP-HF](#) [3.0SMCJ33CA-F](#) [3.0SMCJ36A-F](#) [HSPC16701B02TP](#) [JANTX1N6126A](#) [D3V3Q1B2DLP3-7](#) [D55V0M1B2WS-7](#)
[SCM1293A-04SO](#) [ESD200-B1-CSP0201 E6327](#) [SM12-7](#) [CEN955 W/DATA](#) [VESD12A1A-HD1-GS08](#) [CPDQC5V0-HF](#) [D1213A-01LP4-7B](#)
[ESD101-B1-02EL E6327](#) [AOZ8808DI-03](#) [5KP15A](#) [5KP48A](#) [5KP90A](#) [ESD3V3D7-TP](#) [15KPA36A-LF](#) [P4KE56CA](#) [P4KE68A](#)
[P4KE91CATR](#) [P6KE120A](#) [P6KE13CA](#) [P6KE43CA](#) [P6KE6.8CA](#) [P6KE8.2](#) [P6SMBJ20CA](#) [JANTX1N6072A](#) [SR2835ESKG](#)