



**Features**

- Bi-directional ESD protection of one lines
- 450Watts peak pulse power (tp = 8/20μs)
- Working voltage: 5V
- Junction Capacitance: 60pF(Typ)
- Low clamping voltage
- Low leakage current
- IEC 61000-4-2 ±30kV contact ±30kV air
- IEC 61000-4-5 (Lightning) 30A (8/20μs)


**Applications**

- Cellular Handsets and Accessories
- Personal Digital Assistants
- Notebooks and Handhelds
- Portable Instrumentation
- Peripherals
- Pagers Peripherals
- Desktop and Servers


**Mechanical Data**

- Package:SOD-323
- Molding compound flammability rating: UL 94V-0
- RoHS/WEEE Compliant

**Schematic & PIN Configuration**

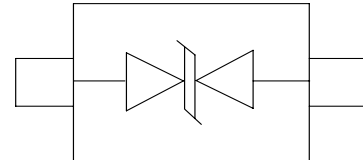

**Ordering Information**

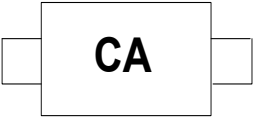Part Number	Package	Marking	Packing	Reel Size
PESD5V0S1BA-N	SOD-323		3000 Tape & Reel	7 inches

**Absolute Maximum Rating**( $T_A=25^{\circ}\text{C}$  unless otherwise Specified)


Parameter	Symbol	Value	Unit
Peak Pulse Power (8/20 $\mu\text{s}$ )	Ppk	450	W
Peak Pulse Current (8/20 $\mu\text{s}$ )	IPP	30	A
ESD per IEC 61000-4-2 (Air) ESD per IEC 61000-4-2 (Contact)	VESD	$\pm 30$ $\pm 30$	kV
Operating Temperature Range	TJ	-55 to +125	$^{\circ}\text{C}$
Storage Temperature Range	Tstg	-55 to +150	$^{\circ}\text{C}$

**Electrical Characteristics**( $T_A=25^{\circ}\text{C}$  unless otherwise Specified)

Parameter	Symbol	Test Condition	Min	Typ	Max	Unit
Reverse Working Voltage	VRWM				5	V
Breakdown Voltage	VBR	$I_T = 1\text{mA}(\text{Pin1-Pin2})$	6.0	7.0	8.0	V
Reverse Leakage Current	$I_R$	$VRWM = 5.0\text{V}(\text{Pin2-Pin1})$			0.5	$\mu\text{A}$
Clamping Voltage	VC	$IPP = 10\text{A}$ (8 x 20 $\mu\text{s}$ pulse) (Pin1-Pin2)		9.0	11.0	V
Clamping Voltage	VC	$IPP = 30\text{A}$ (8 x 20 $\mu\text{s}$ pulse) (Pin1-Pin2)		12.0	15.0	V
Junction Capacitance	CJ	$VR = 0\text{V}$ , $f = 1\text{MHz}$ (Pin1-Pin2)		60	100	pF


**Electrical Parameters** ( $T_A = 25^{\circ}\text{C}$  unless otherwise noted)

Symbol	Parameter
$I_T$	Test Current
IPP	Maximum Reverse Peak Pulse Current
Vc	Clamping Voltage @Ic

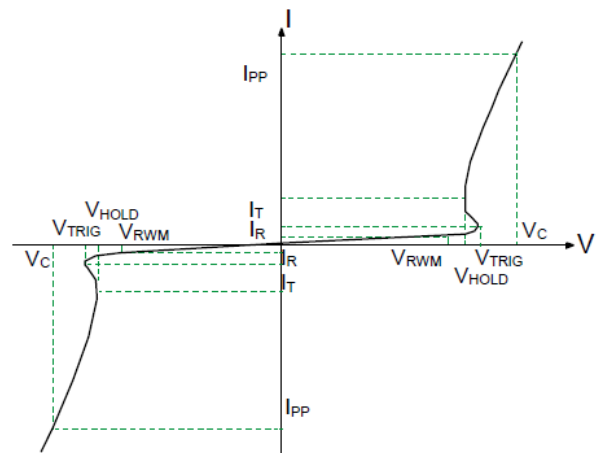





Typical Characteristics( $T_A=25^{\circ}C$  unless otherwise Specified)

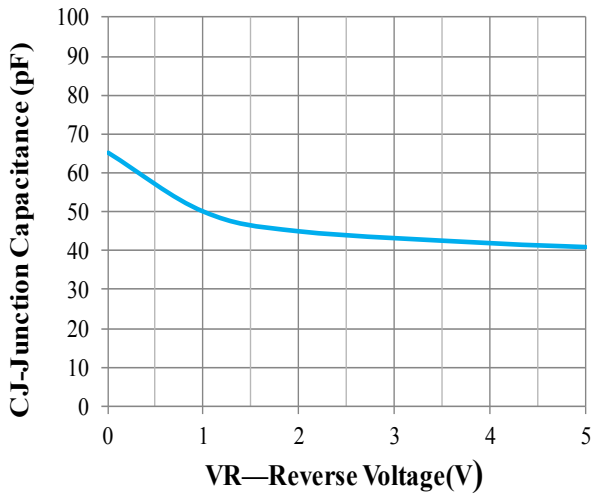


Junction Capacitance vs. Reverse Voltage

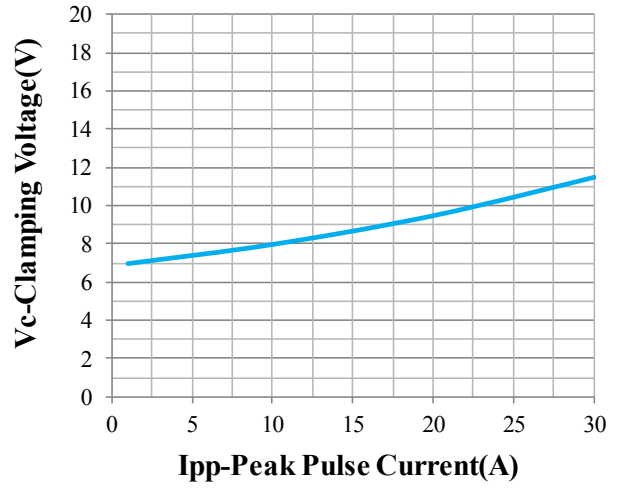


Clamping Voltage vs. Peak Pulse Current

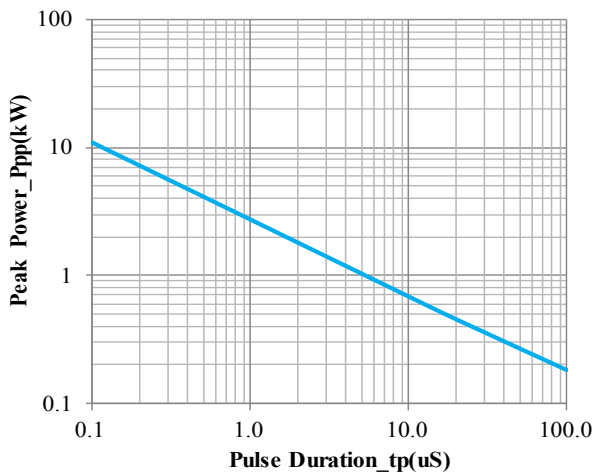


Peak Pulse Power vs. Pulse Time

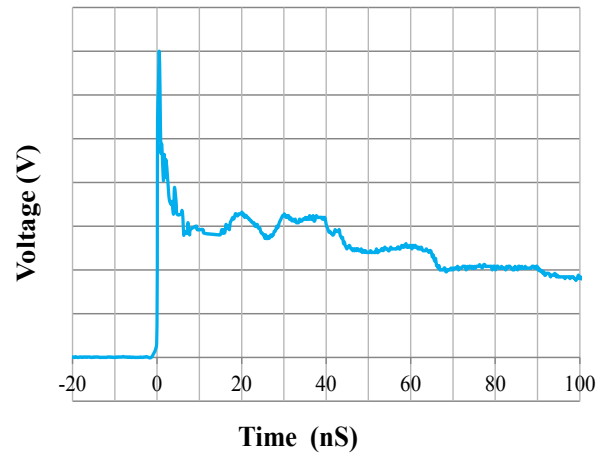

IEC61000-4-2 Pulse Waveform

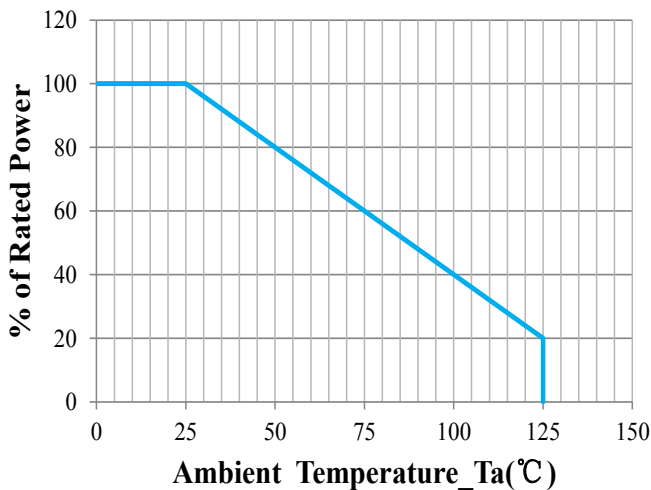


Power Derating Curve

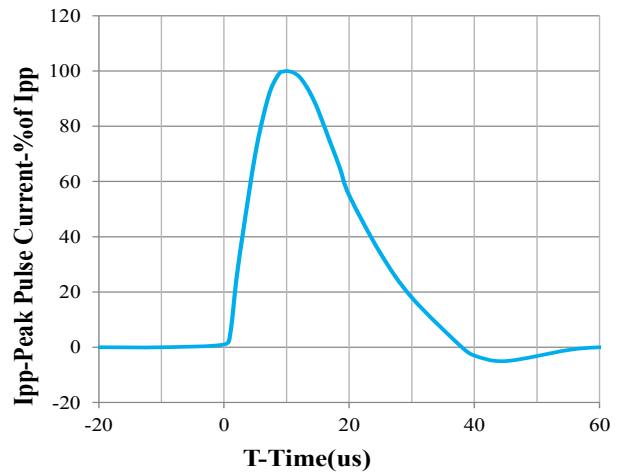

8 X 20us Pulse Waveform



Outline Drawing – SOD-323

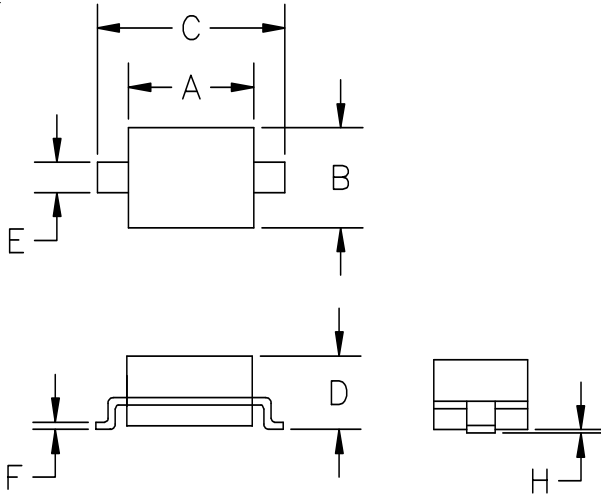

SYM	DIMENSIONS			
	MILLIMETERS		INCHES	
	MIN	MAX	MIN	MAX
A	1.50	1.80	0.060	0.071
B	1.20	1.40	0.045	0.054
C	2.30	2.70	0.090	0.107
D	-	1.10	-	0.043
E	0.30	0.40	0.012	0.016
F	0.10	0.25	0.004	0.010
H	-	0.10	-	0.004

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [ESD Suppressors / TVS Diodes](#) category:*

*Click to view products by [DOWO](#) manufacturer:*

Other Similar products are found below :

[60KS200C](#) [D18V0L1B2LP-7B](#) [D5V0F4U5P5-7](#) [NTE4902](#) [P4KE27CA](#) [P6KE11CA](#) [P6KE8.2A](#) [SA60CA](#) [SA64CA](#) [SMBJ12CATR](#)  
[SMBJ33CATR](#) [SMBJ6.5A](#) [SMBJ8.0A](#) [ESD101-B1-02ELS E6327](#) [ESD112-B1-02EL E6327](#) [ESD7451N2T5G](#) [19180-510](#) [CPDT-5V0USP-](#)  
[HF](#) [3.0SMCJ33CA-F](#) [3.0SMCJ36A-F](#) [HSPC16701B02TP](#) [JANTX1N6126A](#) [D3V3Q1B2DLP3-7](#) [D55V0M1B2WS-7](#) [SCM1293A-04SO](#)  
[ESD200-B1-CSP0201 E6327](#) [SM12-7](#) [CEN955 W/DATA](#) [VESD12A1A-HD1-GS08](#) [CPDQC5V0-HF](#) [D1213A-01LP4-7B](#) [ESD101-B1-02EL](#)  
[E6327](#) [AOZ8808DI-03](#) [5KP15A](#) [5KP48A](#) [5KP90A](#) [ESD3V3D7-TP](#) [15KPA36A-LF](#) [P4KE56CA](#) [P4KE68A](#) [P4KE91CATR](#) [P6KE120A](#)  
[P6KE13CA](#) [P6KE43CA](#) [P6KE6.8CA](#) [P6KE8.2](#) [P6SMBJ20CA](#) [JANTX1N6072A](#) [SR2835ESKG](#) [SA90CA](#)