

Features

- Uni-directional ESD protection of four lines
- 120W Peak pulse Power (8/20us)
- Working voltage: 3.3V
- Junction Capacitance: 0.3pF(Typ) I/O to I/O
- Low clamping voltage
- Low leakage current
- IEC 61000-4-2 ± 12 kV contact ± 17 kV air
- IEC 61000-4-5 (Lightning) 8A (8/20 μ s)
- IEC 61000-4-4 (EFT) 40A (5/50ns)


Mechanical Data

- Package:DFN2510-10L
- Molding compound flammability rating: UL 94V-0
- RoHS/WEEE Compliant

Applications

- HDMI/USB2.0
- Monitors and flat panel displays
- 10/100/1000 ethernet
- Notebook computers
- SIM ports
- ATM interface

Schematic & PIN Configuration



Ordering Information

Part Number	Package	Marking	Packing	Reel Size
PUSB3FR4Z	DFN2510-10L	3324P	3000 Tape & Reel	7 inches



Absolute Maximum Rating($T_A=25^{\circ}\text{C}$ unless otherwise Specified)


Úææ ã^c^Á	Û { à Á	T ã Ě	T æ Ě	W } ãÁ
Úææ ã^c^Á [, ^Á M Ě • D G °CÁ	Ú \	Ě	120	Y
Úææ ã^c^Á II^ } ó M Ě • D G °CÁ	ÓÚ		8	œ
ÒÜÖ (ÒÔĪ FĚĚ ĚÁĪ & @ * ^ D G °CÁ	XÒÜÖ	Ě	† 17	\ XÁ
ÒÜÖ (ÒÔĪ FĚĚ ĚÁĪ } æÁĪ & @ * ^ D G °CÁ	XÒÜÖ	Ě	† 12	\ XÁ
R } & ã } Á {] ^ Á	VR	Ě	150	°CÁ
U] ^ Á * Á {] ^ Á	VUÚ	Ě €	125	°CÁ
Ù ã } Á {] ^ Á	VÜVÖ	Ě 5	Fí €	°CÁ
Š æ Á {] ^ Á	VŠ	Ě	Gí €	°CÁ

Electrical Characteristics($T_A=25^{\circ}\text{C}$ unless otherwise Specified)


Parameter	Symbol	Test Condition	Min	Typ	Max	Unit
Reverse Working Voltage	VRWM				3.3	V
Breakdown Voltage	VBR	IT = 1mA	4			V
Reverse Leakage Current	IR	VRWM = 3.3V			1	uA
Holding Voltage	VC	IPP=1A; tp=8/20us		7	9	V
Clamping Voltage	VC	IPP=8A;tp=8/20us		13	15	V
Junction Capacitance	CJ	I/O to GND; VR=0V; f=1MHz		0.6	1.0	pF
Junction Capacitance	CJ	I/O to I/O; VR=0V; f=1MHz		0.3	0.5	pF



Symbol	Parameters
VRWM	Peak Reverse Working Voltage
IR	Reverse Leakage Current @ VRWM
VBR	Breakdown Voltage @ IT
IT	Test Current
IPP	Maximum Reverse Peak Pulse Current
VC	Clamping Voltage @ IPP
IF	Forward Current
VF	Forward Voltage @ IF

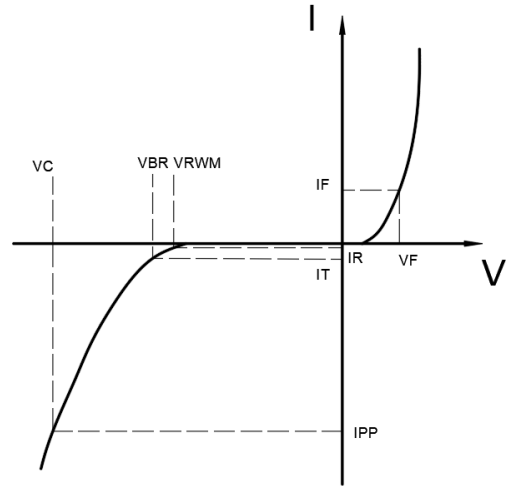


Typical Characteristics (TA=25°C unless otherwise Specified)

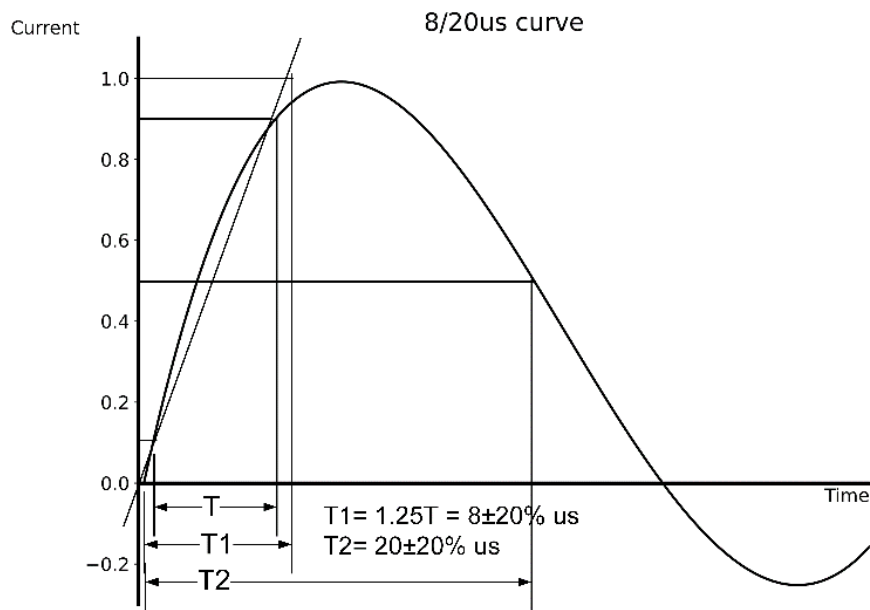



Outline Drawing – DFN2510-10L

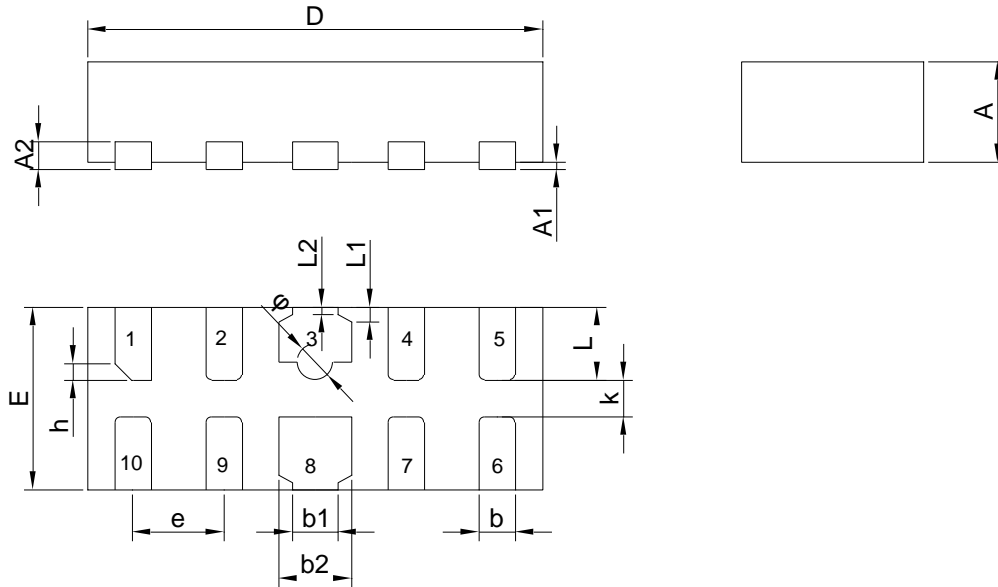

Dimensions in Millimeter							
Symbol	Min.	Nom.	Max.	Symbol	Min.	Nom.	Max.
A	0.500	0.550	0.600	D	2.450	2.500	2.550
A1	0.00	/	0.05	E	0.950	1.00	1.050
A2	0.122	0.152	0.200	e	0.450	0.500	0.550
b	0.150	0.200	0.250	h	0.080	0.120	0.150
b1	0.200	0.250	0.300	k	0.150	0.200	0.250
b2	0.350	0.400	0.450	L	0.350	0.400	0.450
L1	0.075 REF			L2	0.05 REF		
φ	0.150	0.200	0.250				

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [ESD Suppressors / TVS Diodes](#) category:

Click to view products by [DOWO](#) manufacturer:

Other Similar products are found below :

[60KS200C](#) [D18V0L1B2LP-7B](#) [D5V0F4U5P5-7](#) [NTE4902](#) [P4KE27CA](#) [P6KE11CA](#) [P6KE8.2A](#) [JANTX1N6053A](#) [SA60CA](#) [SA64CA](#)
[SMBJ12CATR](#) [SMBJ33CATR](#) [SMBJ6.5A](#) [SMBJ8.0A](#) [ESD101-B1-02ELS E6327](#) [ESD112-B1-02EL E6327](#) [ESD7451N2T5G](#) [19180-510](#)
[CPDT-5V0USP-HF](#) [3.0SMCJ33CA-F](#) [3.0SMCJ36A-F](#) [HSPC16701B02TP](#) [JANTX1N6126A](#) [D3V3Q1B2DLP3-7](#) [D55V0M1B2WS-7](#)
[SCM1293A-04SO](#) [ESD200-B1-CSP0201 E6327](#) [SM12-7](#) [CEN955 W/DATA](#) [VESD12A1A-HD1-GS08](#) [CPDQC5V0-HF](#) [D1213A-01LP4-7B](#)
[ESD101-B1-02EL E6327](#) [AOZ8808DI-03](#) [5KP15A](#) [5KP48A](#) [5KP90A](#) [ESD3V3D7-TP](#) [15KPA36A-LF](#) [P4KE56CA](#) [P4KE68A](#)
[P4KE91CATR](#) [P6KE120A](#) [P6KE13CA](#) [P6KE43CA](#) [P6KE6.8CA](#) [P6KE8.2](#) [P6SMBJ20CA](#) [JANTX1N6072A](#) [SR2835ESKG](#)