

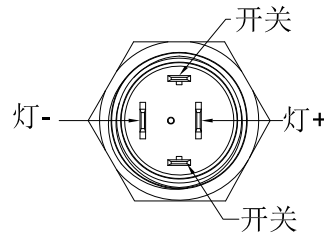

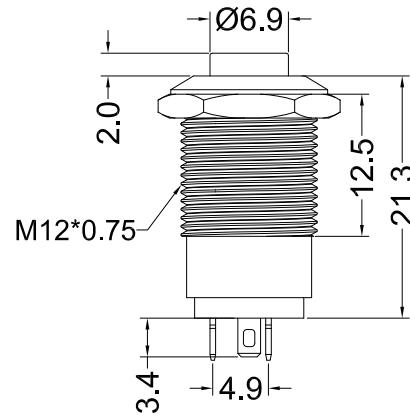
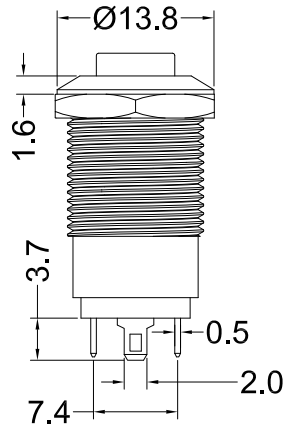


备注：
拧螺母，配垫圈。

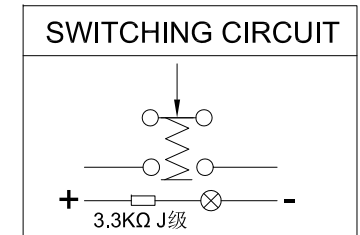

Nut Torque:5~14Nm
 Operating Pressure:300gf ±100gf
 Operating Stroke:2.8mm±0.3
 Protection Grade:IP67
 Function:ON-OFF
 Base:PA66
 Shell:Brass,Ni Plating
 Button:SUS
 Lamp Type:LED
 Lamp Life:50000H
 Forward current:20mA Max
 Rating:0.2A 250V AC/0.5A 12V DC
 Contact Resistance:50mΩ Max
 Insulation Resistance:100MΩ Min
 Dielectric Strength:1500VAC 1 minute
 Electrical life:50,000 cycles
 Mechanical life:100,000 cycles
 Operating Temperature:-20°C~80°C
 Relative Air Humidity:45%~85%
 Safety Approval:



				 D-SWITCH [®] 东莞市德崧电子有限公司 D-SWITCH ELECTRONICS CO.,LTD					
		公差 TOLERANCES		.X± 0.5	.XX± 0.3	角度 ANGLE ±1°		单位 DIMENSION UNIT mm.	
		版本 VERSION		A0	比例尺 SCALE		1:1	日期 DATE	
		日期 DATE		2022.08.03		品名 TITLE		图号 DRAWING NO	
		核准 APPROVED BY		核对 CHECKED BY		绘图 DRAWN BY		孙成	
版本 VER		变更说明 CHANGE DESCRIPTION		日期 DATE		ECN NO.		PBM-12Z12-HT-G4-R24-B8S-0004	
								1010719	

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Pushbutton Switches](#) category:

Click to view products by [D-SWITCH](#) manufacturer:

Other Similar products are found below :

[8971K1133](#) [LW2L-M1C20M-A](#) [01-153.025](#) [M22-D-R-GB0/K11](#) [67021K512](#) [701PB580](#) [7199K101](#) [810K12910](#) [810KSV30B](#) [FLT 2U EE](#)
[01A](#) [MML21EA2ADK](#) [MML21KA3ABK](#) [MML23KW3AA01W](#) [8418K2](#) [8442K3](#) [8450K1](#) [860K11911T01A](#) [861901](#) [861K11911T01A07](#)
[861K13810T00A14](#) [861K13911](#) [8646AB6X718UL](#) [9533CD4+U574+U4922](#) [99-450.837](#) [99-453.837](#) [A2PMA1X03EC56](#) [A3A-7310](#) [A3A-](#)
[7340](#) [12037A2ULCSA](#) [1203A2UL](#) [ABGW410-R](#) [1211390004](#) [ABN400-R](#) [121382](#) [1213C3](#) [HE3B-M2](#) [1211500044](#) [121194](#) [1212MRA](#)
[1232A6NF](#) [121489](#) [1223A2ULCSA](#) [D5P-MT4](#) [13435AG](#) [13445AD29GX768](#) [AG23-L2](#) [AH165-2SGLG1TE3](#) [AH165-TGFY22](#) [AH165-](#)
[TGL5Y11E3](#) [AH165-TGLR11AA3](#)