

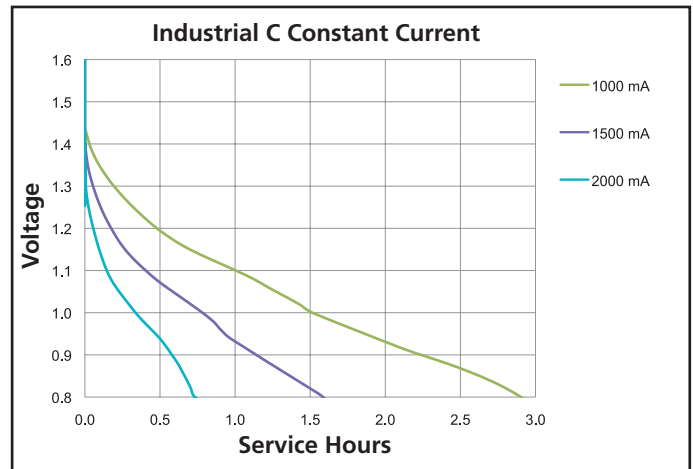
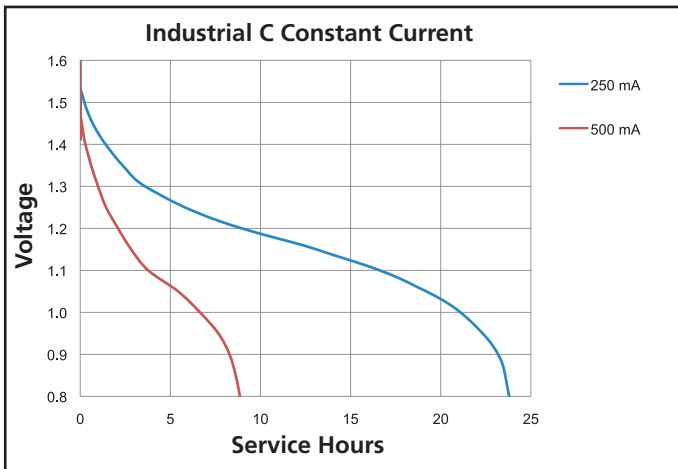
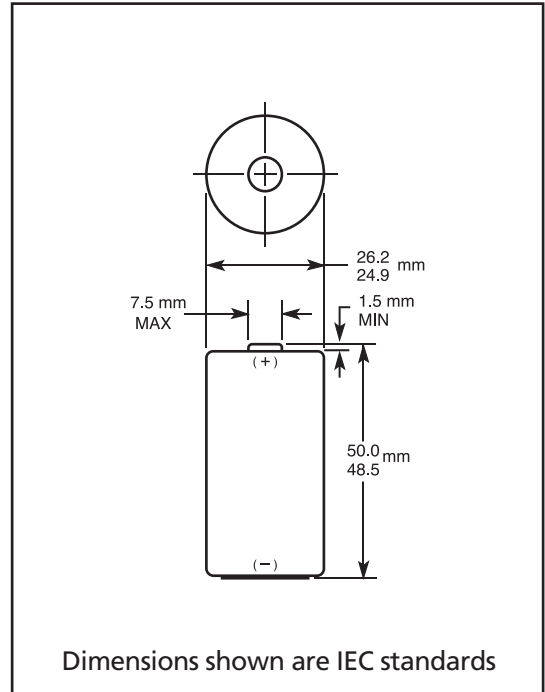
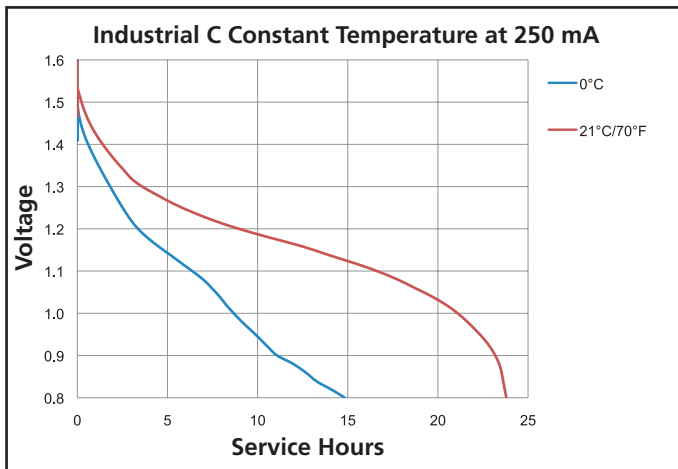


Nominal voltage	1.5 V
Impedance	150 m-ohm @ 1 kHz
Typical weight	69 g (2.4 oz)
Typical volume	26.9 cm <sup>3</sup> (1.6 in <sup>3</sup> )
Terminals	Flat
Storage temperature range	5°C to 30°C (41°F to 86°F)
Operating temperature range	-20°C to 54°C (-4°F to 130°F)
Designation	IEC: LR14

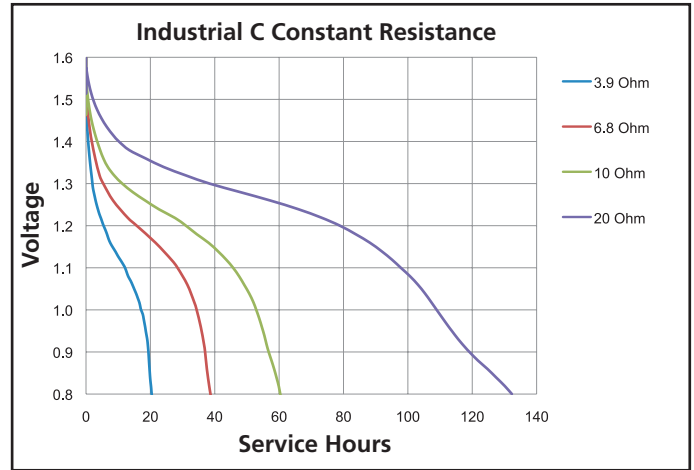

Berkshire Corporate Park  
Bethel, CT. 06801 U.S.A.  
Telephone: Toll-free 1-800-544-5454  
www.duracell.com

Delivered capacity is dependent on the applied load, operating temperature and cut-off voltage. Please refer to the charts and discharge data shown for examples of the energy/service life that the battery will provide for various load conditions.

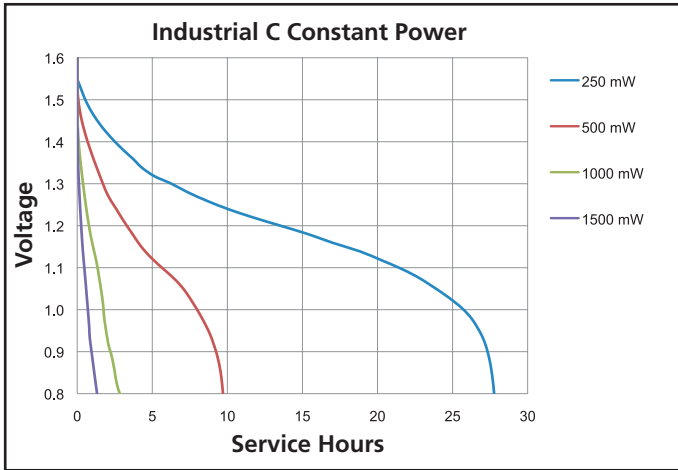

**DURACELL**<sup>®</sup>  
BATTERIES

Berkshire Corporate Park  
Bethel, CT. 06801 U.S.A.  
Telephone: Toll-free 1-800-544-5454  
www.duracell.com

Delivered capacity is dependent on the applied load, operating temperature and cut-off voltage. Please refer to the charts and discharge data shown for examples of the energy/service life that the battery will provide for various load conditions.

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Duracell](#) manufacturer:*

Other Similar products are found below :

[MS76B](#) [PC134A](#) [CEF27 2XAA 2XAAA](#) [DRN5923](#) [CEF14 2XAA 2XAAA](#) [DRC6104](#) [PX32AB](#) [DRC6101](#) [DRC6105](#) [DRF5982](#) [DRG5945](#)  
[DRN5926](#) [DRP5962](#) [DRS5964](#) [DRC6103](#) [DRP5952](#) [DRP5960](#) [DRP5954](#) [5000394002852](#) [DRN6112](#) [DRO5941](#) [675 ET](#) [DRN5921](#)  
[DRC5908](#) [364 D364 V364 SR60](#) [DRG5946](#) [DRS6120](#) [10 ET](#) [DRO5940](#) [DRN6113](#) [DRC5901](#) [DRN5930](#) [DRN5924](#) [DRC5911](#) [DRP5958](#)  
[DRP5953](#) [DRS5963](#) [DRO5942](#) [ACCU-R3/750/DR](#) [DURACELL AA 1300MAH BLISTER B4](#) [DRF5983](#) [392](#) [DRO5943](#) [DRS5965](#)  
[LR3/AAA/MN2400\(K4\) PLUS POWER](#) [DRS5962](#) [7K67 J](#) [13 ET](#) [DRS5960](#) [DRC5905](#)