


Diameter: 20.0 mm (0.78")
Height: 3.20 mm (0.125")


Specifications

Classifications:	Lithium
Chemical System	Manganese Dioxide Li/Organic Electrolyte
Designation:	ANSI CR2032, IEC 5004LC
Nominal Voltage:	3V
Storage Temp:	+5°C to +30°C
Operating Temp:	-20°C to +60°C
Typical Weight:	3.0 gm
Typical Volume:	0.63 cm ³ (0.04 in ³)
Typical Li Content:	0.07g
Transportation:	For complete details, please see the reference: Special Provision A45 of the International Air Transport Association Dangerous Goods Regulations
Global (except US)	
United States:	49 CFR 173.185

Relative Capacity vs. Discharge

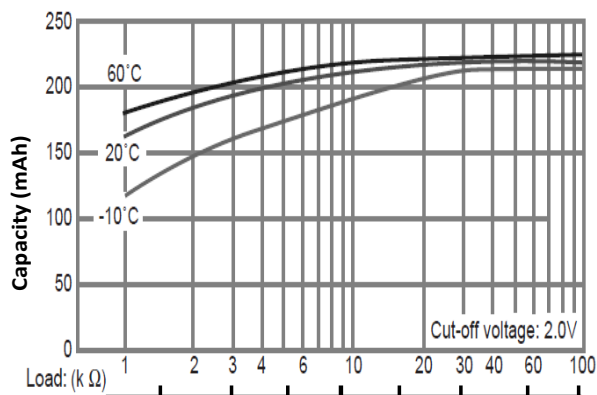

Constant Temperature Discharge @ 15 kΩ

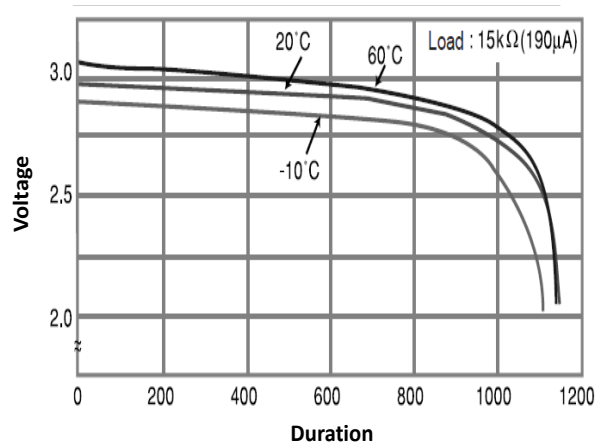

* Nominal capacity indicates duration until the voltage drops down to 2.0V when discharged at a nominal discharge current at 20°C.
 ** When using these batteries at temperatures outside the range of -20 to +60°C, please consult Duracell in advance for conditions of use.
 *** Dimensions and weight are for the battery itself, but may vary depending on the shape of terminals or other factors.

DURACELL®
 BATTERIES

Berkshire Corporate Park
 Bethel, CT 06801 U.S.A
 Telephone: Toll-free 1-800-544-5454
 Internet: www.duracell.com

*Delivered capacity is dependent on the applied load, intermittent changes, operating temperature and cut off voltage. Please refer to the charts and discharge data shown for examples of energy/service life that the battery will provide for various conditions.

Information and contents in this data sheet are for reference purposes only. They do not constitute any warranty and representation is subject to change without notice. For the most current information and further details, please contact Duracell.

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Coin Cell Battery](#) category:

Other Similar products are found below :

[449915B](#) [RJD3048HPPV30M](#) [NI-MH-B80H-3A3H](#) [095668F](#) [458980A](#)