



Dimensions shown are IEC standards

Nominal voltage	1.5 V
Impedance	71 m-ohm @ 1 kHz
Typical weight	24 g (0.8 oz)
Typical volume	8.4 cm ³ (0.5 in ³)
Terminals	Flat
Storage temperature range	5°C to 30°C (41°F to 86°F)
Operating temperature range	-20°C to 54°C (-4°F to 130°F)
Designation	ANSI: 15A IEC: LR6

Coppertop AA - Constant Current

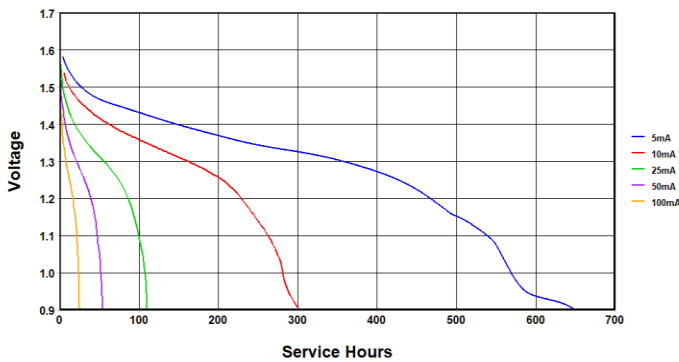

Coppertop AA - Constant Current

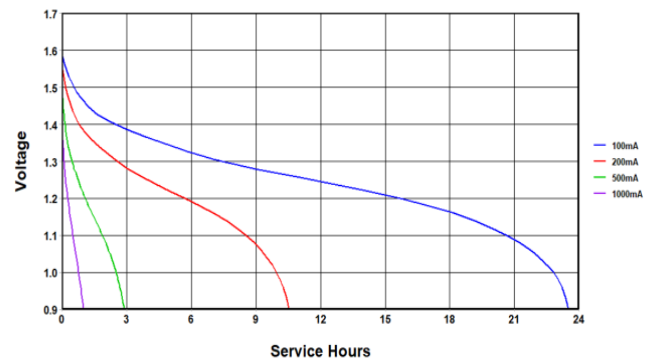


DURACELL®


A Berkshire Hathaway Company
 Berkshire Corporate Park
 Bethel, CT. 06801 U.S.A.
 Telephone: Toll-free 1-800-544-5454
 www.duracell.com

Delivered capacity is dependent on the applied load, operating temperature and cut-off voltage. Please refer to the charts and discharge data shown for examples of the energy/service life that the battery will provide for various load conditions.


Coppertop AA - Constant Power

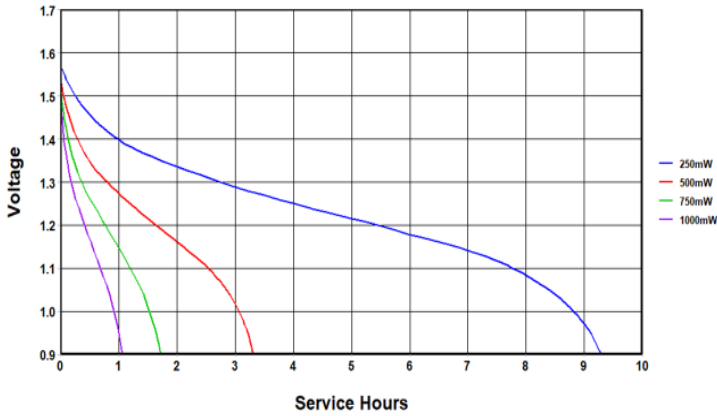

Coppertop AA - Constant Resistance

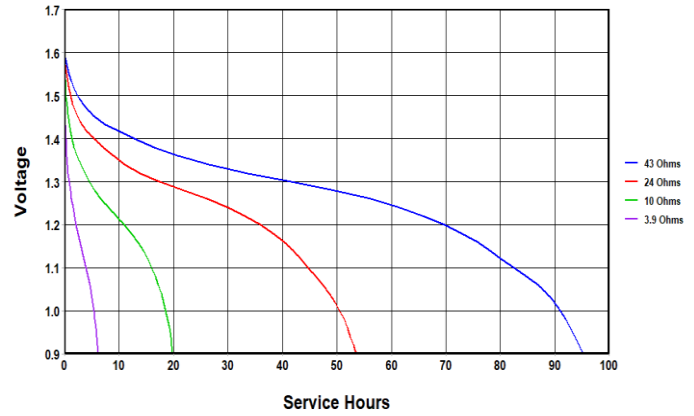

Typical Duracell Coppertop AA Cell Impedance

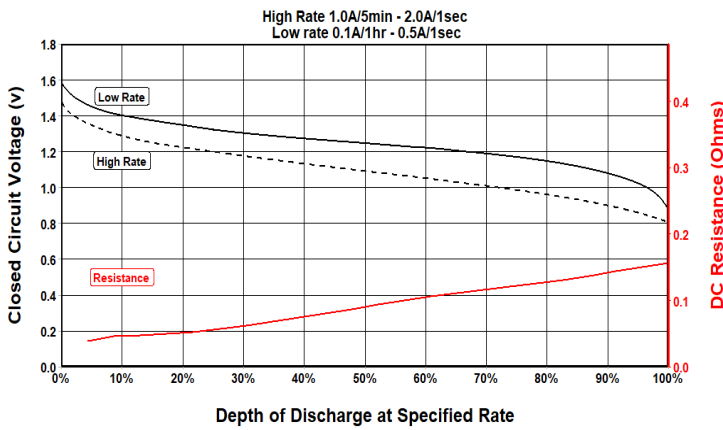

DURACELL®

A Berkshire Hathaway Company
 Berkshire Corporate Park
 Bethel, CT. 06801 U.S.A.
 Telephone: Toll-free 1-800-544-5454
 www.duracell.com

Delivered capacity is dependent on the applied load, operating temperature and cut-off voltage. Please refer to the charts and discharge data shown for examples of the energy/service life that the battery will provide for various load conditions.

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Consumer Battery & Photo Battery](#) category:

Click to view products by [Duracell](#) manufacturer:

Other Similar products are found below :

[6LR61AD/B](#) [2909830](#) [CR-2PA/1B](#) [CR-123APA/1B](#) [LR6XWA/3SB](#) [MN1300](#) [LR14XWA/BB](#) [LR20XWA/B](#) [MN1604](#) [MN2400](#)
[LR03XWA/B](#) [LR14XWA/B](#) [LR6XWA/B](#) [PC1604](#)