


## Stop Switch, Series 51

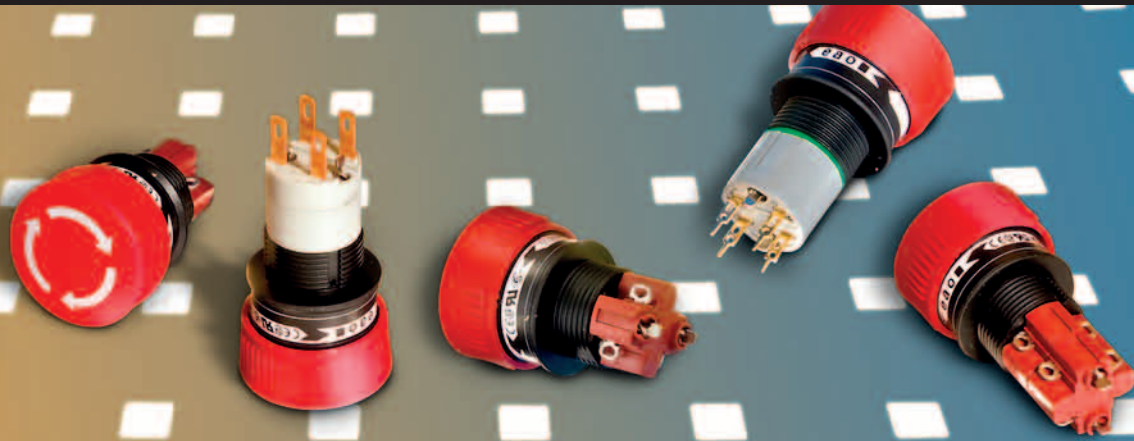

EAO – the expert partner for Human Machine Interfaces – has launched a new compact stop switch with an ultra-low, less than 19mm back panel depth. The new Series 51 Stop Switch utilises a mono block design with an integrated switching element to set a new space-saving standard for industry.

The mono block design minimises the back panel depth and offers an extremely rugged construction that protects the switch from damage caused by heavy-handed use, or operator abuse. The ground-breaking design has been tested beyond 100,000 actuations, so it's a genuine fit-and-forget product.

### Main features

- Back panel depth of only 18.8mm, with solder terminal version S16
- Choice of connection methods: solder, plug-in or PCB mount
- Visible actuation status
- Attractive and ergonomic design
- Protected to IP65 from the front

### Mounting

16 mm Ø mounting hole

### Typical applications

This compact, cost effective switch is suitable for equipment that requires a reliable, rugged and attractive stop switch for non-hazardous applications including:

- Medical diagnostic equipment
- Hand held terminals
- Machine and process controls
- Instrumentation
- Supermarket check-outs
- Disabled lifts

### Switching system

- Switching element with solder connection
  - Self-cleaning, double-break snap-action switching system
  - 1 NC contact and 1 NO contact per switching element
  - Available with up to two switching elements (2 NC contact and 2 NO contact)
- Switching element with 2.8mm plug-in/solder connection
  - Self-cleaning, double-break snap-action switching system. (1 NC contact and 1 NO contact)
- Low signal level switching element with 2.0mm plug-in, solder or PCB mount connection.
  - Single-break momentary contact switch system. Two contacts per switching element with a combination of NC and NO contacts

### Material

Actuator housing	Polyamide (PA66), Thermoplastic elastomer (TPE)
Lens	Polyamide (PA6)
Actuator	Polybutylene Terephthalate (PBT)
Label	R-640 polyester

### Switching element

Solder connection:	Polyamide (PA 6.6)
Plug-in/solder connection:	Diallyl Phthalate (DAP), Polyamide (PA), Polysulfone (PSU)
Plug-in/solder/PCB connection:	Polysulfone (PSU)

### Contact material

Snap action solder connection:	gold-plated silver
Snap action plug-in/solder connection:	gold-plated silver
Low level plug-in/solder/PCB connection:	gold-plated

**Mechanical properties**

- Connections
  - Solder or solder/plug connection, 2.8×0.5 mm
  - Universal connection with 2.0×0.5 mm plug-in/solder and PCB connection
- Actuating force: 4 ... 6 N (depending on the switching element)
- Mechanical lifetime: 100,000 switching cycles


**Electrical properties**

Solder element:	min. 5 VAC/DC, 1 mA max. 250 VAC/DC, 5 A
Plug-in/solder element:	min. 5 VAC/DC, 1 mA max. 250 VAC/DC, 5 A
Plug-in/solder/PCB element:	min. 100 µV/10 µA max. 42 VAC/DC, 100 mA

**Environmental conditions**


- Temperature:
  - Storage temperature: –40 °C ... +85 °C
  - Operating temperature: –25 °C ... +55 °C
- Degree of front protection: IP65
- Approvals: UL/CSA pending, CB, ENEC (EN 61058-1)
- Declaration of conformity: CE

**Wiring Diagrams**

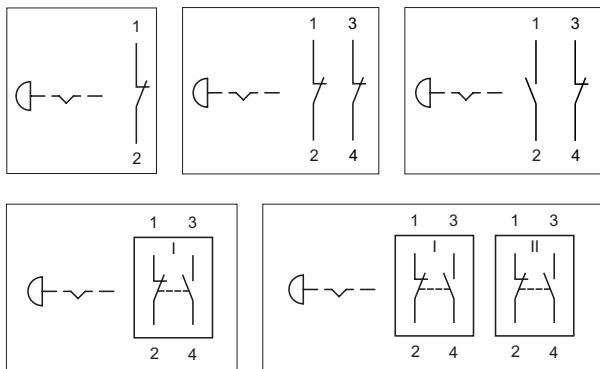


**Versions**


Solder connection




Solder connection




Plug-in/solder connection



Plug-in/solder/PCB connection



**Drilling pattern**



3D product drawings are available in a range of formats to download from our website [www.eao.com](http://www.eao.com)

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Emergency Stop Switches / E-Stop Switches](#) category:*

*Click to view products by [EAO manufacturer](#):*

Other Similar products are found below :

[84-5021.2B40](#) [84-6830.0020](#) [A01ESSP8](#) [A22EL-M-24A-11B](#) [AVN302N-R](#) [A165E-S-01\(STOP\)](#) [AYLD2212602SN-R-TK962](#)  
[AVLD39911N-R-24V](#) [A22Z-EG22](#) [A165E-SY](#) [3100.0110Y](#) [3050.1302Y](#) [3SE2243-0XX40](#) [3SK1111-2AB30](#) [3SK1211-1BB40](#) [44-710](#) [84-](#)  
[6841.2B20](#) [84-6830.0040](#) [H3141AAKAA](#) [A165E-R-24D-01](#) [E3102AAAAB](#) [A22E-M-03](#) [ZA2BV05](#) [A22EL-M-T2-01](#) [951FY000-WO](#)  
[ER6022-022N](#) [952+2000-00](#) [ES3S51653](#) [601+0000-OP](#) [E3101AAAAB](#) [84-5130.0040](#) [CS AR-05V024](#) [CS AR-22V024](#) [DS AE1VA](#) [DS](#)  
[KB2A](#) [DS KB3A](#) [HE2G-21SHE-L-K](#) [HE6B-M211Y](#) [774191](#) [774316](#) [777760](#) [R1.100.0129.0 SMA0129- NO/NO](#) [R1.188.0640.0 SNV](#)  
[4063KL-A](#) [R1.188.1810.0 SNA 4043K-A](#) [R1.188.1840.0 SNA 4043K-A](#) [SR BD40ALK-B02F](#) [AVLW39911D-R-120V](#) [AYD311NUG](#)  
[AVLD32211DNUR](#) [84-5040.0020.0049](#)