


EK75SB005 Datasheet

Technical Specifications

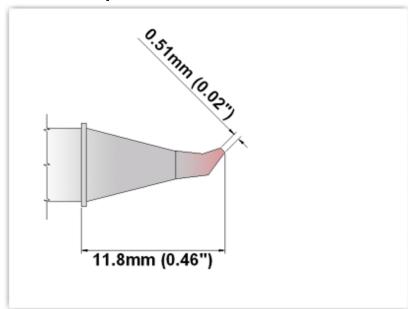

EK75SB005

Bent Sharp 30° 0.51mm (0.02")

Tip Style: Bent Sharp 30°
Tip Width: 0.51mm (0.02")
Tip Length: 11.80mm (0.46")

75 Type Cartridge¹: 350°C - 398°C


RoHS Compliant² / Lead Free: YES

Equivalent to: SFV-CNB05

For Use With: EB-2000S, PS900 w/SHP-K, MFR-PS1100/MFR-PS2200 w/SHP-KM

Material Composition



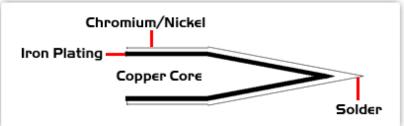



All components are RoHS compliant and Lead-Free.

Easy Braid Co. tip cartridges will typically idle within a temperature range of +/-1.1°C. However, there is variation in idle temperature across tip geometries within an individual temperature series. Easy Braid Co. offers a wide variety of tip geometries from 0.25mm fine point tip to 5mm chisel. The length and geometry of a tip will have an influence on the tip idle temperature. To accurately measure idle temperature it will depend greatly on the measurement method,

technique and equipment used. Two different methods or the use of alternative equipment will produce different test results.

² Please refer to $\underline{\text{http://www.rohs.gov.uk}}$ for details on RoHS Compliance.

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for easy braid manufacturer:

Other Similar products are found below:

EB41D2120 ETZ-KIT-1 SHP-PM Q-A-100 OS-E-100 OS-A-100 S-B-5AS OS-E-25 S2626-O-T OS-E-10AS S-E-100 Q-B-100 S-A-100 Q-D-100 S3030R-O-T Q-E-10AS Q-B-25 Q-E-25 LF-A-5AS Q-A-25 Q-A-10AS Q-E-100 LF-E-5AS S-B-100 S2235-O-T OS-D-100 LF-B-5AS Q-A-5AS S-A-10AS S-D-10AS LF-D-5AS LF-C-10AS S-B-10AS LF-D-10AS Q-D-10AS S-C-5AS OS-D-5AS Q-E-5AS OS-C-100 OS-B-25 S-D-5AS Q-D-25 Q-C-100 OS-B-100 S-E-5AS OS-D-10AS Q-C-25 S-E-10AS OS-E-5AS Q-B-10AS