

# Bussmann series 690 Volts gG/gL NH Fuse links



## Product description

Eaton's Bussmann series 690 V a.c. NH square bodied industrial fuse links are suitable for a wide variety of applications.

## Standard features

- Reliable dual indicator system
- Low temperature rise
- Globally compliant
- Compatible with Bussmann series PV NH base range (see data sheet 10163)

**Catalogue symbol:**

- (amp)NHG(size)B-690 with conducting metal gripping lugs

**Fuse size:**

- 000 to 4\*

**Technical data:**

- Volts: 690 V a.c.
- Amps: 2 to 800 A
- Breaking capacity: 120 kA AC
- Operating frequency: 45-62 Hz
- Class of operation: gG/gL

**Standards/Approvals:**

- IEC 60269
- VDE 0636
- DIN 43620


**Microswitches:**

- 170H0236
- BVL50

**Packaging:**

- Sizes 000 to 3: 3 per carton
- Size 4: 1 per carton

**Size - mm**

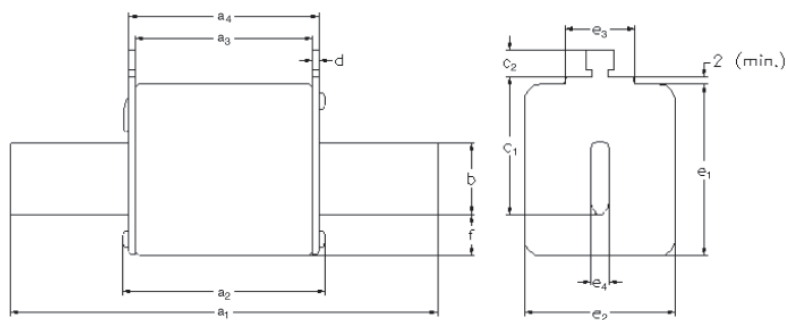

**Table 1. NH Sizes**

Size	a1	a2 (max)	a3	a4	b	c1	c2	d	e1 (max)	e2 (max)	e3 (max)	e4	f (max)
000	78.5 ± 1.5	54	45±1.5	49±1.5	15	35	10	2±0.5	41	21	16	6	8
00	78.5 ± 1.5	54	45±1.5	49±1.5	15	35	11	2±0.5	48	30	25	6	15
1	135±2.5	75	62±2.5	68±2.5	20	40	11	2.5±0.5	53	40	25	6	15
2	150±2.5	75	62±2.5	68±2.5	25	48	11	2.5±0.5	61	53	25	6	15
3	150±2.5	75	62±2.5	68±2.5	32	60	11	3±0.5	75	70	25	6	18
4*	200±3	84	62±2.5	90±3	50	85	10	3±0.5	102	87	25	8	30


\* Single indication slotted tags

Table 2. Part numbers

Size	Rated current (Amps)	Rated voltage (V a.c.)	gG/gL dual indicator	Pack quantity
			Voltage conducting metal gripping lugs	
000	2	690	2NHG000B-690	3
	4		4NHG000B-690	
	6		6NHG000B-690	
	10		10NHG000B-690	
	16		16NHG000B-690	
	20		20NHG000B-690	
	25		25NHG000B-690	
	32		32NHG000B-690	
	35		35NHG000B-690	
	40		40NHG000B-690	
	50		50NHG000B-690	
	63		63NHG000B-690	
	00		50	
63		63NHG00B-690		
80		80NHG00B-690		
100		100NHG00B-690		
125		125NHG00B-690		
160		160NHG00B-660		
1	50	690	50NHG1B-690	
	63		63NHG1B-690	
	80		80NHG1B-690	
	100		100NHG1B-690	
	125		125NHG1B-690	
	160		160NHG1B-690	
	200		200NHG1B-690	
	224		224NHG1B-690	
	250		250NHG1B-690	
2	200		200NHG2B-690	
	224		224NHG2B-690	
	250		250NHG2B-690	
	315		315NHG2B-690	
3	250		250NHG3B-690	
	315		315NHG3B-690	
	355		355NHG3B-690	
	400		400NHG3B-690	
	425		425NHG3B-690	
	500		500NHG3B-690	
4	630		630NHG4B-690	1
	800		800NHG4B-690	

\* Available upon request

Time-current curves - NH Size 000

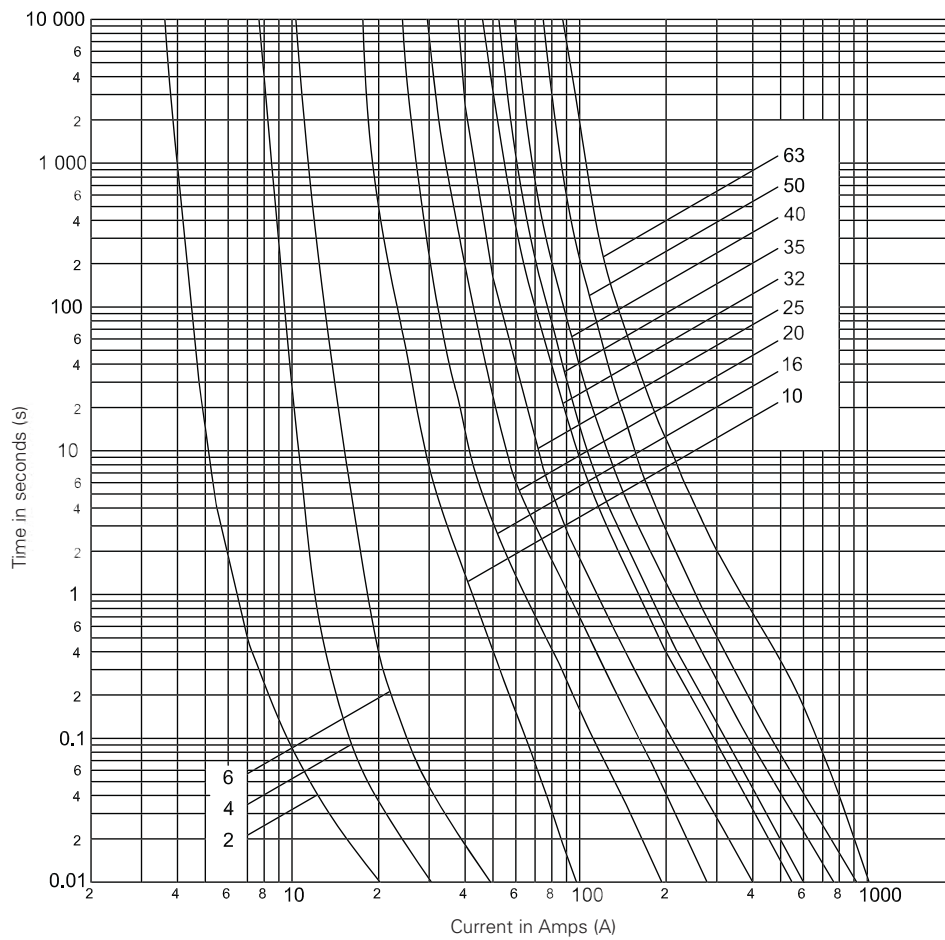


Technical data - NH size 000

Part numbers with metal gripping lugs	Fuse link size	Rated current (Amps)	Rated voltage (V a.c.)	I <sup>2</sup> t (Amps <sup>2</sup> Seconds)			Net weight per fuse (kg)
				Minimum pre-arcing	*I <sub>1</sub> , 120kA at 690 V a.c.	Watts loss	
2NHG000B-690	000	2	690	3.5	8	4	0.118
4NHG000B-690		4		6	16	2	
6NHG000B-690		6		14	25	2	
10NHG000B-690		10		60	400	1.5	
16NHG000B-690		16		240	1200	2.5	
20NHG000B-690		20		500	2500	2.5	
25NHG000B-690		25		920	4400	3.5	
32NHG000B-690		32		1800	9600	3.5	
35NHG000B-690		35		2800	15,000	4	
40NHG000B-690		40		3300	15,000	4	
50NHG000B-690		50		6100	26,500	5.5	
63NHG000B-690		63		6500	30,500	5.5	

\*I<sub>1</sub> is the maximum breaking capacity test at rated voltage according to IEC 60269 requirements

Time-current curves - NH Size 00

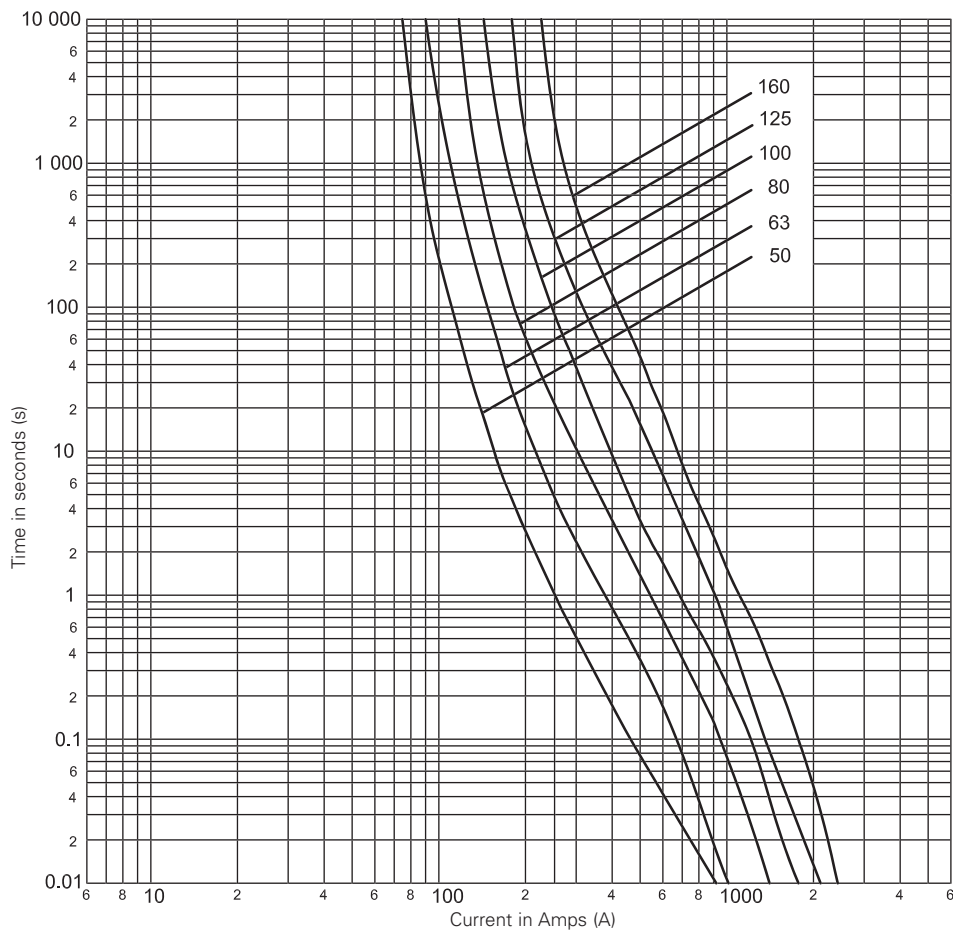


Technical data - NH size 00

Part numbers with metal gripping lugs	Fuse link size	Rated current (Amps)	Rated voltage (V a.c.)	I <sup>2</sup> t (Amps <sup>2</sup> Seconds)			Net weight per fuse (kg)
				Minimum pre-arcing	*I <sub>1</sub> , 120kA at 690 V a.c.	Watts loss	
50NHG00B-690	00	50	690	5800	35,000	5	0.182
63NHG00B-690		63		5800	43,000	5	
80NHG00B-690		80		11,000	54,500	7	
100NHG00B-690		100		19,000	92,000	7.5	
125NHG00B-690		125		27,500	105,000	9.5	
160NHG00B-660		160	660	40,500	135,000	13	

\*I<sub>1</sub> is the maximum breaking capacity test at rated voltage according to IEC 60269 requirements

Time-current curves - NH Size 1

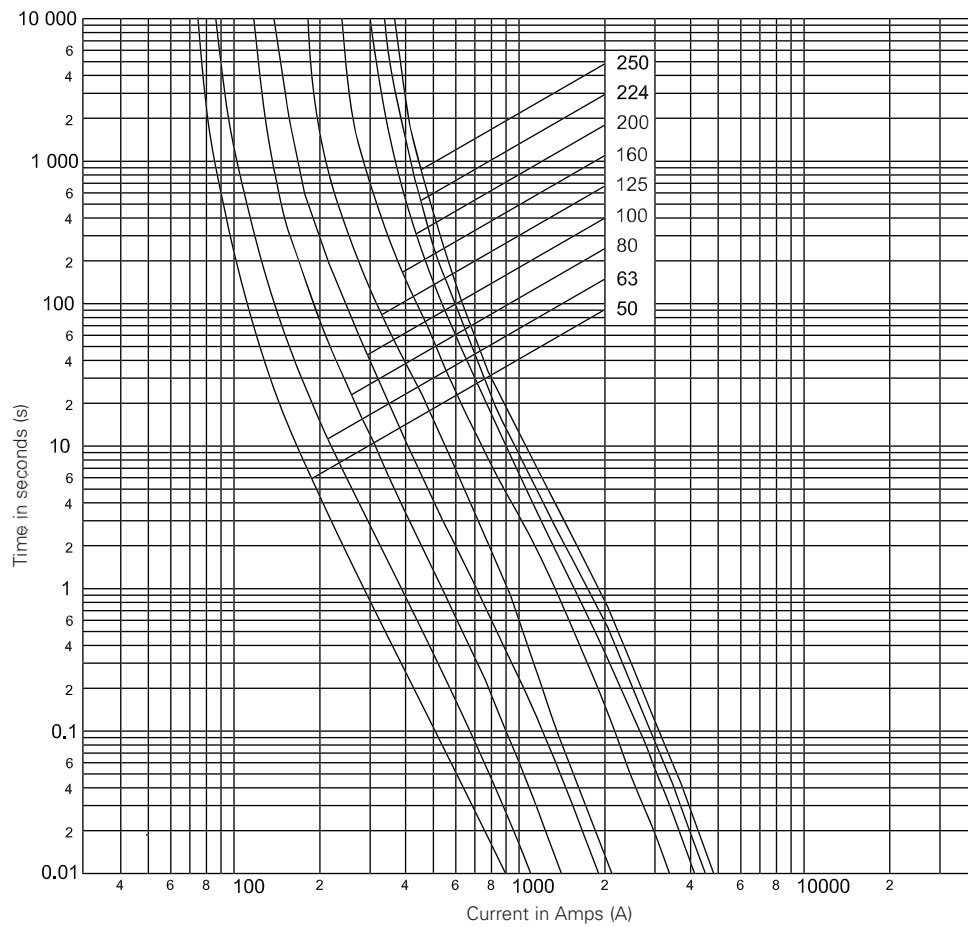


Technical data - NH size 1

Part numbers with metal gripping lugs	Fuse link size	Rated current (Amps)	Rated voltage (V a.c.)	I <sup>2</sup> t (Amps <sup>2</sup> Seconds)			Net weight per fuse (kg)
				Minimum pre-arcing	*I <sub>b</sub> 120kA at 690 V a.c.	Watts loss	
50NHG1B-690	1	50	690	6350	26,500	6.4	0.38
63NHG1B-690		63		6800	36,000	5.6	
80NHG1B-690		80		10,500	47,500	7.7	
100NHG1B-690		100		22,000	105,000	8.2	
125NHG1B-690		125		29,000	120,000	13	
160NHG1B-690		160		71,000	240,000	13	
200NHG1B-690		200		105,000	350,000	17	
224NHG1B-690		224		120,000	430,000	19	
250NHG1B-690		250		150,000	520,000	22	

\*I<sub>b</sub> is the maximum breaking capacity test at rated voltage according to IEC 60269 requirements

Time-current curves - NH Size 2

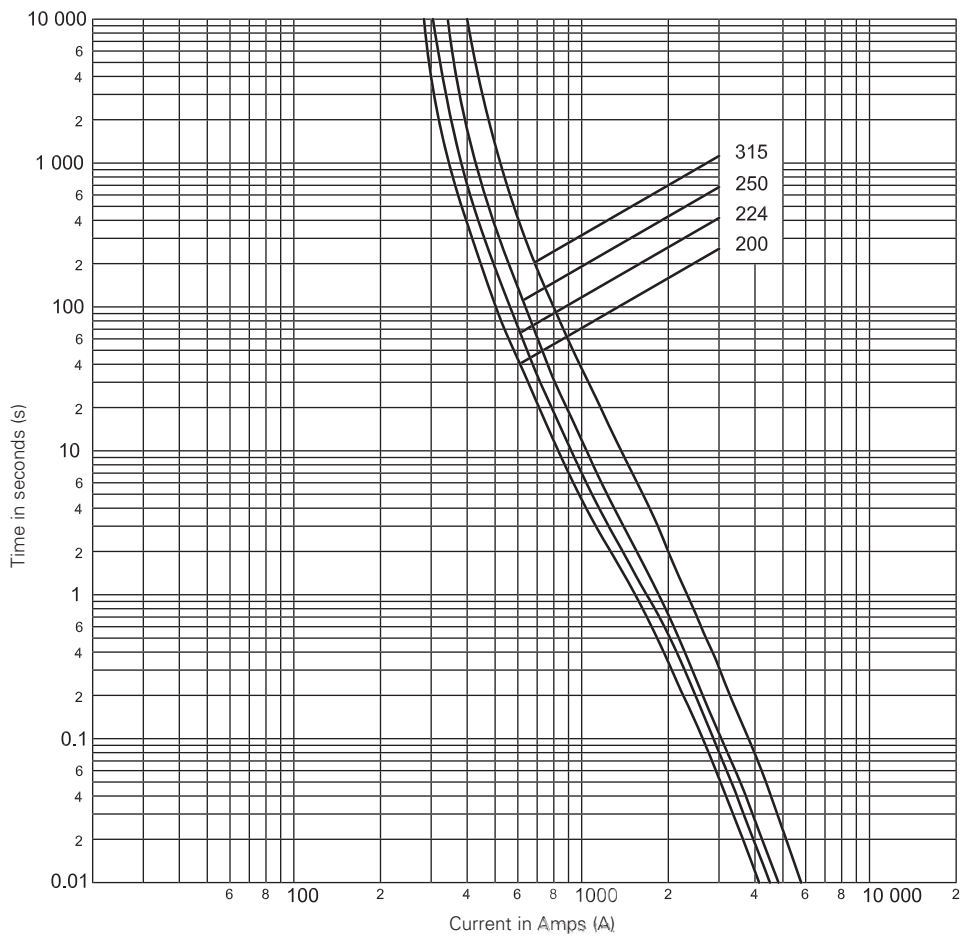


Technical data - NH size 2

Part numbers with metal gripping lugs	Fuse link size	Rated current (Amps)	Rated voltage (V a.c.)	I <sup>2</sup> t (Amps <sup>2</sup> Seconds)			Net weight per fuse (kg)
				Minimum pre-arcing	*I <sub>1</sub> 120kA at 690 V a.c.	Watts loss	
200NHG2B-690	2	200	690	99,000	385,000	18	0.62
224NHG2B-690		224		130,000	485,000	20	
250NHG2B-690		250		170,000	625,000	23	
315NHG2B-690		315		295,000	760,000	32	

\*I<sub>1</sub> is the maximum breaking capacity test at rated voltage according to IEC 60269 requirements

Time-current curves - NH Size 3

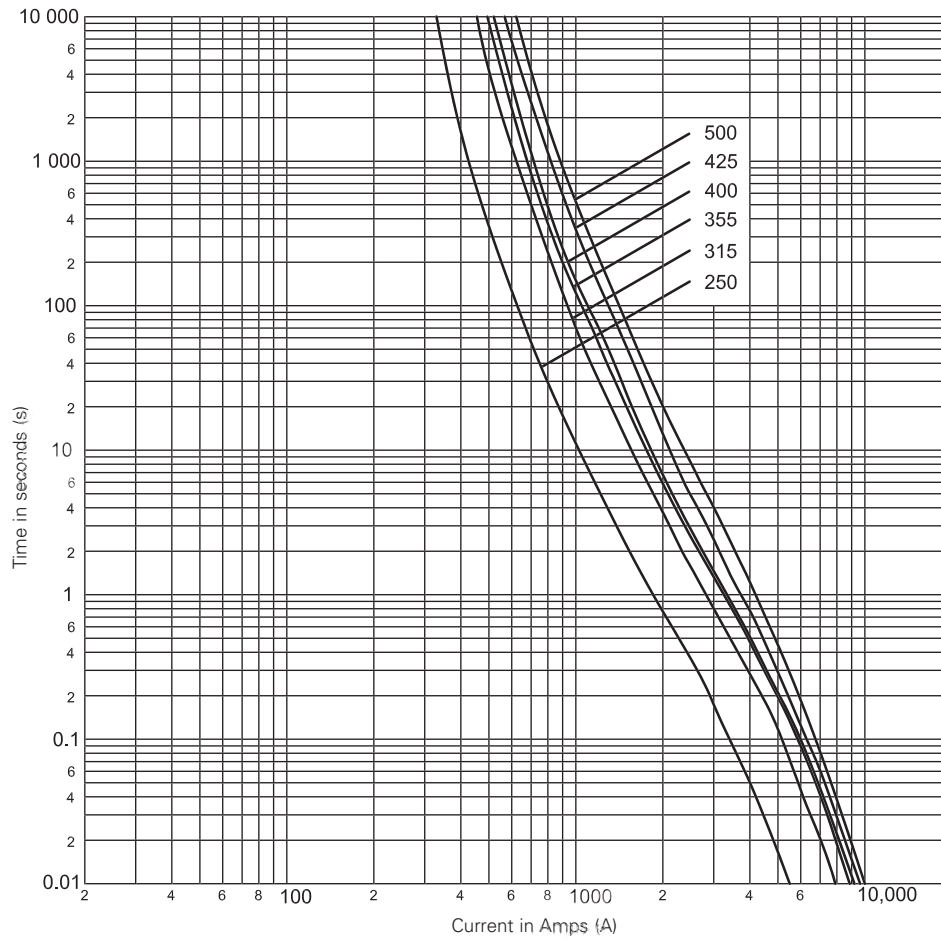


Technical data - NH size 3

Part numbers with metal gripping lugs	Fuse link size	Rated current (Amps)	Rated voltage (V a.c.)	I <sup>2</sup> t (Amps <sup>2</sup> Seconds)			Net weight per fuse (kg)
				Minimum pre-arcing	*I <sub>1</sub> 120kA at 690 V a.c.	Watts loss	
250NHG3B-690	3	250	690	160,000	715,000	21	0.38
315NHG3B-690		315		375,000	1,400,000	22	
355NHG3B-690		355		400,000	1,650,000	25	
400NHG3B-690		400		475,000	1,600,000	37	
425NHG3B-690		425		630,000	1,700,000	35	
500NHG3B-690		500		856,000	2,480,000	43	

\*I<sub>1</sub> is the maximum breaking capacity test at rated voltage according to IEC 60269 requirements



Time-current curves - NH Size 4 Single indication slotted tags

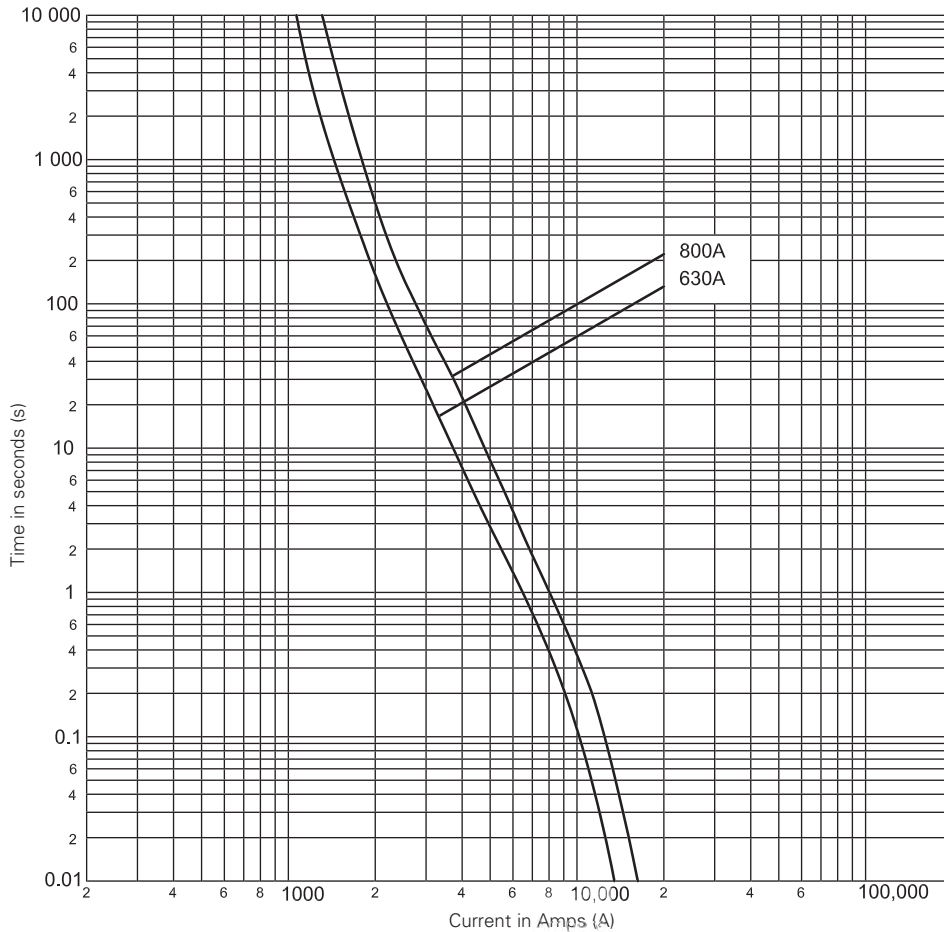

Technical data - NH size 4

Part numbers with metal gripping lugs	Fuse link size	Rated current (Amps)	Rated voltage (V a.c.)	I²t (Amps² Seconds)		Watts loss	Net weight per fuse (kg)
				Minimum pre-arcing	*I <sub>b</sub> 120kA at 690 V a.c.		
630NHG4B-690	4	630	690	1,730,000	6,550,000	44	2.5
800NHG4B-690		800		3,330,000	11,000,000	61	

\*I<sub>b</sub> is the maximum breaking capacity test at rated voltage according to IEC 60269 requirements

Changes to the products, to the information contained in this document, and to prices are reserved; so are errors and omissions. Only order confirmations and technical documentation by Eaton is binding. Photos and pictures also do not warrant a specific layout or functionality. Their use in whatever form is subject to prior approval by Eaton. The same applies to Trademarks (especially Eaton, Moeller, and Cutler-Hammer). The Terms and Conditions of Eaton apply, as referenced on Eaton Internet pages and Eaton order confirmations.

Eaton Industries Manufacturing GmbH  
Electrical Sector EMEA  
Route de la Longeraie  
71110 Morges, Switzerland  
Eaton.eu

© 2015 Eaton  
All Rights Reserved  
Publication No. 720109  
September 2015

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Specialty Fuses](#) category:*

*Click to view products by [Eaton](#) manufacturer:*

Other Similar products are found below :

[63NZ02GL](#) [80NH00GR-6](#) [FWP-32A14F](#) [12LCT](#) [ECF-1](#) [ECF-2](#) [ECF-3](#) [ECF-4](#) [170M3809D](#) [N-2-1/2](#) [N-3-2/10](#) [NITD2](#) [16D27SB](#) [16FC](#)  
[170M1564D](#) [170M4241](#) [ESD63](#) [ABS-30](#) [ABS-8](#) [FWP-25A14FI](#) [FWP-80A22FI](#) [30CIF06](#) [32CMLC](#) [32NH00AM-6](#) [TDC180-2](#) [TPL-BL](#)  
[TPS-5](#) [KLC40](#) [WKL](#) [NITD25](#) [04450080FX850](#) [NITD16](#) [LA60Q152](#) [LA60Q402](#) [ECF-5](#) [TDC180-10](#) [TDC180-7](#) [TPM-25](#) [3AG-312](#)  
[16NHG000B](#) [170M3509](#) [DEO200](#) [DD200M250](#) [BP/S-6-1/4](#) [170M3510](#) [TPH-300](#) [EFS200](#) [170M0161](#) [170M6016](#) [BK/F02B-1/2A](#)