


Bolt In Automotive Fuses

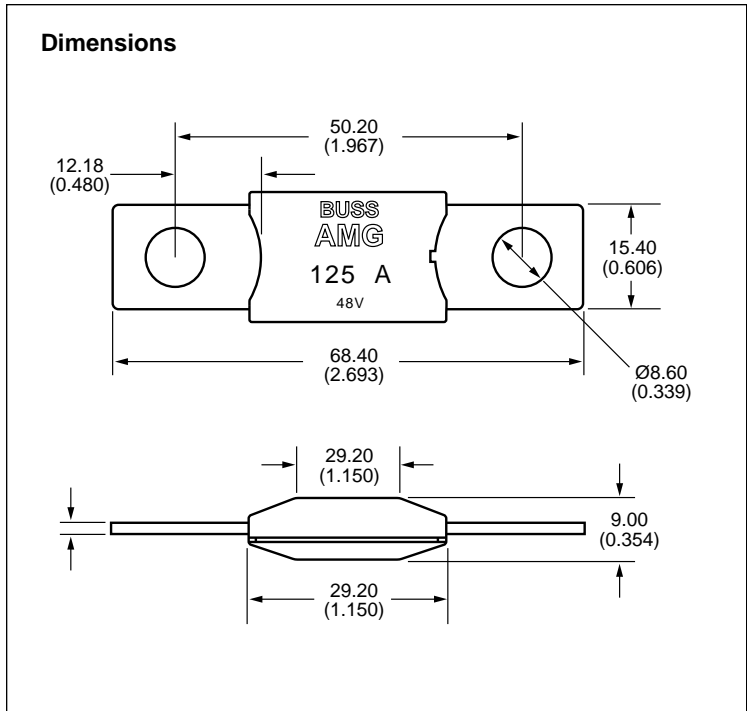

SPECIFICATIONS:

Bolt-In Mounting Configurations: Mounts on 8mm or less studs on 50.8mm centers.

Material: Copper terminals with UL Rated 94VO white thermoplastic housing

Applications: For high current (100A - 300A) applications on 48VDC or less systems requiring interrupting ratings up to 1000A.

For use with the Bussmann HMG Fuseholder - see page 21.

Time Current Specifications

Amp Rating	135% of I _N	200% of I _N	350% of I _N	600% of I _N	100% I _N Carry	Millivolt Drop @ 100% I _N	Interrupting Capability
100	120-1800 sec.	1-30 sec.	0.1-5 sec.	0.02-1 sec.	Min. 4 hrs.	Max. 150 mV	1KA @ 48VDC
125							
150							
175							
200							
250							
300							

PART NUMBERING SYSTEM

Series Rating

AMG - qq q

- 100 - 100 amps
- 125 - 125 amps
- 150 - 150 amps
- 175 - 175 amps
- 200 - 200 amps
- 250 - 250 amps
- 300 - 300 amps

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Automotive Fuses](#) category:

Click to view products by [Eaton](#) manufacturer:

Other Similar products are found below :

[HBO-10](#) [HBO-100](#) [HBO-150](#) [HBO-40](#) [HBO-50](#) [AFX-150](#) [AT-10](#) [AT-30](#) [AT-5](#) [ATM-10ID](#) [ATM-4LP](#) [ACL-50](#) [AFX-50](#) [299080](#) [HBO-15](#)
[AT-20](#) [AT-3](#) [0287015](#) [142.7010.5502](#) [FMM-15](#) [0MIN015.HXGLO](#) [0695030.PXPS](#) [0695040.PXPS](#) [0297003.WXT](#) [0MIN025.HXGLO](#)
[0MIN030.HXGLO](#) [0695025.PXPS](#) [0695015.PXPS](#) [0695050.PXPS](#) [0695060.PXPS](#) [MRBF-075](#) [ACBP-V-15A](#) [ACB-12-V-30A](#) [ACB-12-V-](#)
[50A](#) [02400106P](#) [0297002.WXT](#) [0297004.WXT](#) [0297010.WXT](#) [0297015.WXT](#) [0297020.WXT](#) [0297025.WXT](#) [0297030.WXT](#)
[029707.5WXT](#) [0602925](#) [0602930](#) [0602935](#) [0602940](#) [0602950](#) [0602960](#) [0611100](#)