

# **AMG SERIES**



**DIMENSIONS** (Dims. are shown for reference only. Consult factory for latest prints)

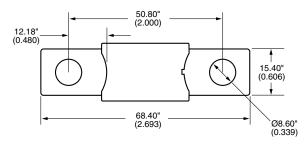



### **BOLT IN AUTOMOTIVE FUSES**


#### **SPECIFICATIONS:**


Applications: For high current applications. Use with Bussmann HMG or FMG fuseholders. (See pages 12-13.) Current Rating: 100-300A. Voltage Rating: 32VDC.\* Interrupt Rating: 1,000A @ 32VDC. Housing Material: UL-Rated 94V-0 thermoplastic. Terminal Material: Copper. Mounting: M8 or 5/16-18 or less studs on 2.00 in (50.8mm) centers. Marking: Color-coded amperage ratings.

\*Consult factory for higher voltage fuses.

TIME-CURRENT SPECIFICATIONS		
% of	Opening Time	
Rating	Minimum	Maximum
100	100 hrs	
135	120 s	1800 s
200	1 s	30 s
350	0.1 s	5 s
600	0.02 s	1 s

## PART NUMBERING SYSTEM



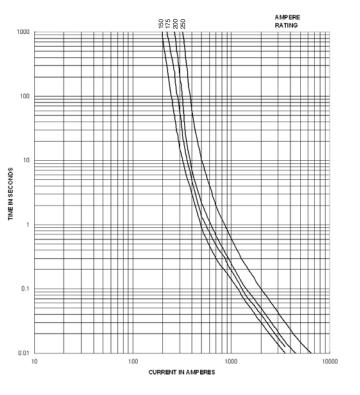

## **X-ON Electronics**

Largest Supplier of Electrical and Electronic Components

Click to view similar products for Automotive Fuses category:

Click to view products by Eaton manufacturer:

Other Similar products are found below :

 HBO-10
 HBO-100
 HBO-150
 HBO-40
 HBO-50
 AFX-150
 AT-10
 AT-30
 AT-5
 ATM-10ID
 ATM-4LP
 ACL-50
 AFX-50
 299080
 HBO-15

 AT-20
 AT-3
 0287015
 142.7010.5502
 FMM-15
 0MIN015.HXGLO
 0695030.PXPS
 0695040.PXPS
 0297003.WXT
 0MIN025.HXGLO

 0MIN030.HXGLO
 0695025.PXPS
 0695015.PXPS
 0695050.PXPS
 0695060.PXPS
 MRBF-075
 ACBP-V-15A
 ACB-12-V-30A
 ACB-12-V 

 50A
 02400106P
 0297002.WXT
 0297004.WXT
 0297010.WXT
 0297015.WXT
 0297025.WXT
 0297030.WXT

 029707.5WXT
 0602925
 0602930
 0602940
 0602950
 0602960
 0611100