

C520

5 mm x 15 mm Fast-acting glass tube fuses



Agency information

- UL Listed Card: Guide JDYX, File E19180
- CSA Certification Card: Class 1422-01, 53787

Ordering

- Specify product code: Insert packaging code prefix before part number. E.g. BK (or BK1)/C520-500-R

Electrical Characteristics		
Rated Current	Amp Rating	Opening Time
100mA - 5A	100%	None
	135%	1 hours max.
	200%	2 seconds max.

Product features

- Fast-acting
- 5 x 14.48mm physical size
- Glass tube, nickel-plated brass endcap construction
- UL Listed product meets standard UL 248-14

Part Number	Voltage Rating Vac	Interrupting Rating at Rated Voltage (amps)		Typical DC Cold Resistance* (Ω)	Typical Melting I ² t** AC	Typical Voltage Drop (mV)***
		250Vac	125Vac			
		C520-100-R	250			
C520-125-R	250	35	10,000	15.20	0.0019	1930
C520-250-R	250	35	10,000	5.60	0.012	1450
C520-375-R	250	35	10,000	2.53	0.039	968
C520-500-R	250	35	10,000	1.66	0.059	845
C520-750-R	250	35	10,000	0.91	0.264	686
C520-1.5-R	250	100	10,000	0.900	0.800	135
C520-2-R	250	100	10,000	0.064	1.9	136
C520-2.5-R	250	100	10,000	0.046	2.9	121
C520-3-R	250	100	10,000	0.038	6.1	116
C520-3.5-R	250	100	10,000	0.032	9.7	115
C520-4-R	250	200	10,000	0.022	16.6	88
C520-5-R	250	200	10,000	0.018	22.4	91

* DC Cold Resistance (Measured at <10% of rated current)


** Typical Melting I²t (A²Sec) (maximum I²t at 10 times rated current)

***Typical Voltage Drop (Voltage drop was measured at 25°C±3°C ambient temperature at rated current)




Powering Business Worldwide

Dimensions - mm
Drawing Not to Scale

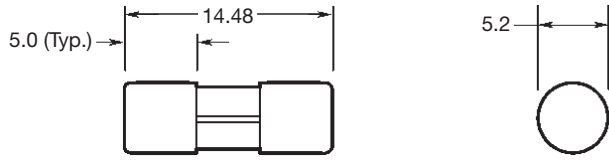

Time-Current Curve
Time-Current Characteristic Curves—Average Melt

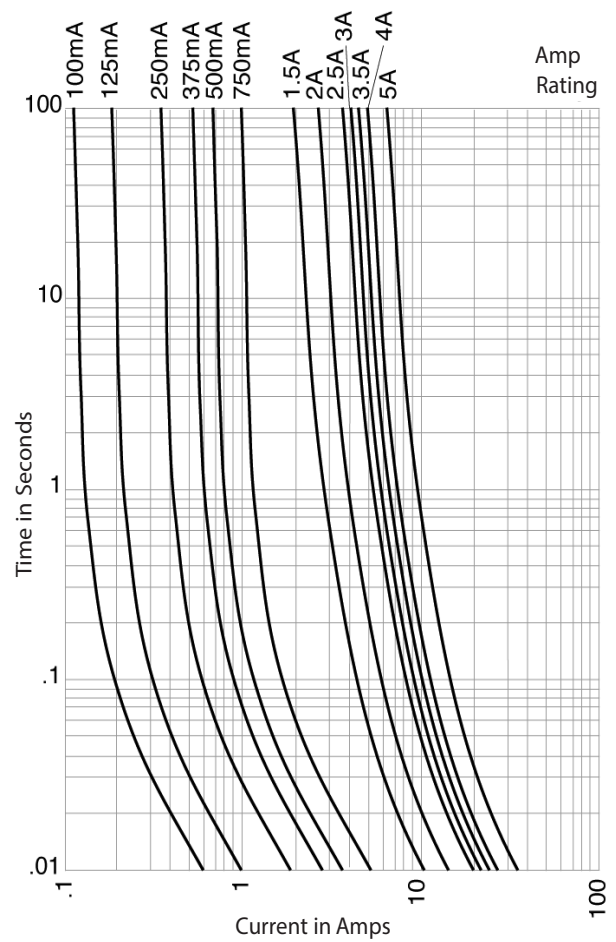

Packaging Code	
Packaging Code Prefix	Description
BK	100 fuses packed into a cardboard carton
BK1	1,000 fuses packed into a cardboard carton

Life Support Policy: Eaton does not authorize the use of any of its products for use in life support devices or systems without the express written approval of an officer of the Company. Life support systems are devices which support or sustain life, and whose failure to perform, when properly used in accordance with instructions for use provided in the labeling, can be reasonably expected to result in significant injury to the user.

Eaton reserves the right, without notice, to change design or construction of any products and to discontinue or limit distribution of any products. Eaton also reserves the right to change or update, without notice, any technical information contained in this bulletin.

Eaton
Electronics Division
1000 Eaton Boulevard
Cleveland, OH 44122
United States
www.eaton.com/electronics

© 2017 Eaton
All Rights Reserved
Printed in USA
Publication No. 2027 BU-SB09252
May 2017

Eaton is a registered trademark.

All other trademarks are property of their respective owners.

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Eaton manufacturer:](#)

Other Similar products are found below :

[BK1-S506-6-3-R](#) [BK-MDL-3-R](#) [BK/ABC-1](#) [BK/MDA-15](#) [GMA-5A](#) [GMA250MA](#) [89096-015](#) [8946K153](#) [8961K155](#) [M22-D-R-GB0/K11](#)
[M22-L-R/R](#) [6422](#) [6580](#) [CTX20-16-52LP-R](#) [CWL530FI](#) [CXM/CO/GP/R/BB](#) [6HD36](#) [714125](#) [MBO-2](#) [7314K36](#) [7321K2](#) [F02A-1-1/2A](#)
[F02A-1-1/2AS](#) [F02A-1AS](#) [F02A-2AS](#) [F02A-3/4A](#) [F03A250V12A](#) [F03B125V4A](#) [MCR-4](#) [MDA-2-8/10-R](#) [MDA-30A](#) [MDA-V-1/16](#)
[F60C500V10AS](#) [F60C500V15AS](#) [7563K84](#) [7634K36](#) [MDQ-3/16](#) [MDQ-7/10](#) [MDQ-V-1/10](#) [MDQ-V-1-1/4](#) [MDQ-V-1/16](#) [MDQ-V-1/2](#)
[MDQ-V-1/4](#) [MDQ-V-3/16](#) [MDQ-V-3/8](#) [MDQ-V-6/10](#) [MDQ-V-6-1/4](#) [MDV-1-1/2](#) [MDV-3/8](#) [MDV-4](#)