COOPER **Bussmann**[®]

Fuse Holders for ¼" x 1 ¼" and 5 x 20mm Fuses




HTB Panel Mount Series

Description


- For ¼" x 1 ¼" and 5 x 20mm fuses
- · All holder bodies have the option of using
- 1/4" x 1 1/4" or 5 x 20mm carriers
- Withstands 15 to 20 Lb-In torque to mounting nut when mounting fuse holder to panel
- · High temperature, flame retardant, Thermoplastic meets UL 94V0

Specifications						
Product	UL Rating	CSA Rating	Voltage	Fuse	Quick	
Code	(amps)	(amps)	Rating	Size	Connect	
HTB-X2I	20	16	250	1⁄4" x 1 1⁄4"	3/16	
HTB-X4I	20	0 16		¼" x 1 ¼"	3/16	
HTB-X6I	20	16	250	¼" x 1 ¼"	1/4"	
HTB-X8I	20	16	250	1⁄4" x 1 1⁄4"	1/4"	
HTB-X2M	16	16	250	5 x 20mm	3/16	
HTB-X4M	16	16	250	5 x 20mm	3/16	
HTB-X6M	16	16	16 250 5 x		1/4"	
HTB-X8M	16	16	250 5 x 20		1/4"	



Replacement Parts

Mounting Dimensions - in (mm)

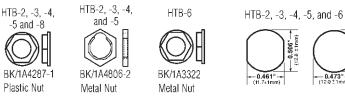

• CE

Agency Information

• UL Recognized: IZLT2, E14853 CSA Component Acceptance: Class 6225-01, File 47235 VDE Certified: 136128, HTB-XXM



SEMKO Certification: Ref. #0146149/01, HTB-XXM



Dimensions - in (mm)


Knob Type Carrier			Terminal Options					
		Maximum	Solder/ ¾ ⁶ Quick-Connect		1/4" Quick-Connect		Carrier Options	
			In-Line	Rt. Angle	In-Line	Rt. Angle	¼″ x 1 ¼″ ("I" Equals Inches)	5 x 20mm ("M" Equals Metric)
		Panel Thickness					Knob	Knob
Common Dimensional Data: Length (Knob Type) - 1.69 (42.9mm) Plus In-Line Terminal NOTE: Plus In-Line Terminal		HICKIESS	0.34" (8.7mm)	0.33" 10 (8.3mm)	0.47" (11.9mm)	0.45" (11.5mm)		
0.47"(11.9mm)	1.125" (28.6mm)	0.30″ 7.62mm	HTB-22I-R	HTB-24I-R	HTB-26I-R	HTB-28I-R	3	
Low Profile → Rear Hex Nut	0.09" NOM. (2.4mm) HTB-2		HTB-22M-R	HTB-24M-R	HTB-26M-R	HTB-28M-R	_	3
0.69"	(23.0mm)	0.125″ 3.18mm 3-4	HTB-42I-R	HTB-44I-R	HTB-46I-R	HTB-48I-R	3	_
High Profile Rear Hex Nut	HTB-4		HTB-42M-R	HTB-44M-R	HTB-46M-R	HTB-48M-R	_	3
0.67" (17.1mm)	0.92"	0.30″	HTB-62I-R	HTB-64I-R	HTB-66I-R	HTB-68I-R	3	_
Front Hex Nut	HTB-6	HTB-62M-R	HTB-64M-R	HTB-66M-R	HTB-68M-R	_	3	
0.47" (11.9mm)	1.125" (28.6mm)	0.125″ 3.18mm	HTB-82I-R	HTB-84I-R	HTB-86I-R	HTB-88I-R	3	_
Low Profile	Profile		HTB-82M-R	HTB-84M-R	HTB-86M-R	HTB-88M-R	_	3

Dimensions - in (mm)

		Terminal Options					
Screwdriver Type Carrier		Solder/ % Quick-Connect		1/4" Quick-Connect		Carrier Options	
	Maximum	In-Line	Rt. Angle	In-Line	Rt. Angle	¼″ x ¼″ ("I" Equals Inches)	5 x 20mm ("M" Equals Metric)
	Panel				Ŭ	Screwdriver	Screwdriver
Common Dimensional Data: (Screwdriver Slotted) 1.75″ (44.5mm) NOTE: Plus In-Line Terminal	Thickness	0.34" (8.7mm)	0.33" O	0.47" (11.9mm)	0.45" (11.5mm)		
0.17" + (40.03mm) (4.37mm) (40.03mm)	0.30″ 7.62mm	HTB-32I-R	HTB-34I-R	HTB-36I-R	HTB-38I-R	3	_
Low Profile Rear Hex Nut HTB-3		HTB-32M-R	HTB-34M-R	HTB-36M-R	HTB-38M-R	—	3
0.41"	0.125″	HTB-52I-R	HTB-54I-R	HTB-56I-R	HTB-58I-R	3	_
High Profile Rear Hex Nut HTB-5	3.18mm	HTB-52M-R	HTB-54M-R	HTB-56M-R	HTB-58M-R	_	3
0.17" (4.37mm)	0.125″ 3.18mm	HTB-92I-R	HTB-94I-R	HTB-96I-R	HTB-98I-R	3	_
Low-Profile Snap-In HTB-9		HTB-92M-R	HTB-94M-R	HTB-96M-R	HTB-98M-R	_	3

Fuseholders and fuse carriers may be ordered separately.

Ordering Information

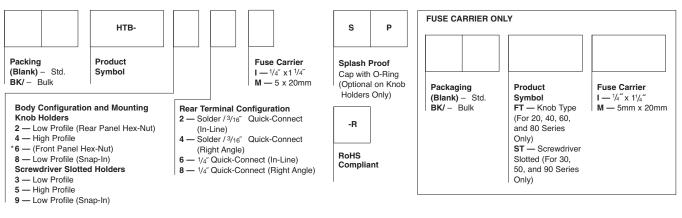

*Profile varies with panel thickness. Holder installs thru rear of panel.

Packaging				
Packaging Code Prefix Description				
Blank 10 fuse holders packed into a carton				
BK	100 fuse holders packed into a cardboard shelf package			

The only controlled copy of this Data Sheet is the electronic read-only version located on the Cooper Bussmann Network Drive. All other copies of this document are by definition uncontrolled. This bulletin is intended to clearly present comprehensive product data and provide technical information that will help the end user with design applications. Cooper Bussmann reserves the right, without notice, to change design or construction of any products and to discontinue or limit distribution of any products. Cooper Bussmann also reserves the right to change or update, without notice, any technical information contained in this bulletin. Once a product has been selected, it should be tested by the user in all possible applications.

Life Support Policy: Cooper Bussmann does not authorize the use of any of its products for use in life support devices or systems without the express written approval of an officer of the Company. Life support systems are devices which support or sustain life, and whose failure to perform, when properly used in accordance with instructions for use provided in the labeling, can be reasonably expected to result in significant injury to the user.

© 2009 Cooper Bussmann St. Louis, MO 63178 www.cooperbussmann.com





COOPER Bussmann

PowerStor

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for Fuse Holder category:

Click to view products by Eaton manufacturer:

Other Similar products are found below :

570-290-741P40 570-290-751P40 020417G 020418E 6R30A1B F600A3B 80910030 8601.2020 G15A2SPQ 9-3557-GP REV A HDJ-B R6J30A3S HFH-1 RF30A1S RF30A2B RF30A3SP 15600-08-10 BK/FHN19G BK/HHM BK/HKP-CCHH BK/HKP-JJ BK/HTJ-LES-FUSE HMG-241 HTJ-LES-FUSE C4044-1 2086-1 2193 2602 2650 178.000100 FHN31G1 T30A2B G4PB8 2660 2799 CQ-209V HKP-CCHH R6F30A2S 341001A 345621A CVRMCC 4202 4407 4408 4413 4423 4532 4537 TSD1404-12 BK/FHN31G1