

<b>Document No.:</b>	EPS-CC12M		
<b>Title:</b>	CC12M Engineering Product Specification		
<b>Created By:</b>	M. Joiner	<b>Engineering Approval</b>	V. Kalra
<b>Date:</b>	Sept 1, 2006	Sheet 1 of 9	



114 Old State Rd. Ellisville, MO 63021

**COPYRIGHT - Cooper Industries, Inc.** This is an unpublished work. Further dissemination or disclosure to the public is PROHIBITED. This unpublished work is protected by Federal Copyright law and all rights thereunder are reserved by Cooper Industries, Inc.

**CONFIDENTIAL** - The information contained in this document is the property of Cooper Industries, Inc. It is not for public disclosure. Possession of the information does not convey any right to loan, sell or disclose the information. Unauthorized reproduction or use of the information is prohibited. This document is to be returned to Cooper Industries, Inc. upon completion of the purposes for which it is loaned or upon request.

Rev.	Revision Description	Date	ECN	Author	Appr.
D	Added CC12M10A , CC12M12A	8/17/07	H07083	Jian.Gong	SD
C	Added the tolerance of dimension, item5.2	6/7/07	H07028	Jian.Gong	SD
B	Added ' Lead-Free' description, item 2.0 ; Changed the resistance and I <sup>2</sup> t, item 6.1 ; Updated Agency Approvals, item 7.0	4/6/07	H07024	Jian.Gong	SD
A	Added CC12M15A, changed voltage to 24V	9/01/06	SB06315	M. Joiner	V. Kalra
--	Initial Release	12/9/05	n/a		

Form 202B-TGW01-IPS, Rev. 3/04

# Engineering Product Specification

## CC12M Series VRM Overcurrent Protection

### Table of Contents

Section	Title
1.0	Scope
2.0	General Information
3.0	Manufacturer and Production Facility
4.0	Part Numbering System
5.0	Mechanical Requirements
6.0	Electrical Specifications
7.0	Agency Requirements
8.0	Marking Specification
9.0	Soldering Recommendations
10.0	Packaging Specification
11.0	Temperature De-Rating
12.0	Process Flow Chart
13.0	Environmental Requirements
14.0	End

<b>Document No.:</b>	EPS-CC12M		
<b>Title:</b>	CC12M		
<b>Created By:</b>	M. Joiner	<b>Eng./Appr.:</b>	V. Kalra
<b>Date:</b>	Sept 1, 2006		Sheet 2 of 9

## 1.0 Scope

This Engineering Product Specification (EPS) is intended to provide end customers with information regarding Bussmann's CC12M VRM Overcurrent Protection Product Series overcurrent protection devices.

## 2.0 General Information

The Bussmann CC12M VRM Overcurrent Protection Device is a RoHS compliant & Lead-Free, one-time fuse based on Bussmann's SolidMatrix technology. It is designed to provide superior protection from short circuit overcurrent events common to high-current Voltage Regulator Module (VRM) equipment. This device is designed to be compatible with wave and IR soldering processes and allow end users to protect their VRM circuits.

## 3.0 Manufacturer and Production Facility

### **Manufacturer**

Cooper Bussmann, Inc.  
P.O. Box 14460  
St. Louis, MO 63178-4460

### **Production Facilities**

- A) Cooper Electronic Shanghai, Ltd  
955 Sheng Li Road  
Pudong, Shanghai, China
  
- B) Silver Victory (Donguan) Plant  
Xin Min Industrial Estate  
Changang Donguan  
Guangdong Province, China

This bulletin is intended to clearly present comprehensive product data and provide technical information that will help the end user with design applications. Bussmann reserves the right, without notice, to change design or construction of any products and to discontinue or limit distribution of any products. Bussmann also reserves the right to change or update, without notice, any technical information contained in this bulletin. Once a product has been selected, it should be tested by the user in all possible applications.

<b>Document No.:</b>	EPS-CC12M		
<b>Title:</b>	CC12M		
<b>Created By:</b>	M. Joiner	<b>Eng./Appr.:</b>	V. Kalra
<b>Date:</b>	Sept 1, 2006	Sheet 3 of 9	

## 4.0 Part Numbering System

### 4.1.1 Catalog Symbol

Example: CC12M20A

<u>CC</u>	<u>12</u>	<u>M</u>	<u>20A</u>
1	2	3	4

- 1) Technology      CC (Ceramic CHIP™Fuse)
- 2) Footprint      12 (1206)
- 3) Family:        M (VRM Protection Device)
- 4) Amp Rating:    20A

### 4.1.2 Available Amperage Ratings

<b>Catalog Symbol</b>	<b>Amperage Rating</b>
CC12M10A	10A
CC12M12A	12A
CC12M15A	15A
CC12M20A	20A


**Note: Amperage rating established in test conditions using 10 AWG wire. Thermal management in end-use application must be taken into consideration.**

This bulletin is intended to clearly present comprehensive product data and provide technical information that will help the end user with design applications. Bussmann reserves the right, without notice, to change design or construction of any products and to discontinue or limit distribution of any products. Bussmann also reserves the right to change or update, without notice, any technical information contained in this bulletin. Once a product has been selected, it should be tested by the user in all possible applications.

Document No.:	EPS-CC12M		
Title:	CC12M		
Created By:	M. Joiner	Eng./Appr.:	V. Kalra
Date:	Sept 1, 2006	Sheet 4 of 9	

## 5.0 Mechanical Requirements


### 5.1 Construction (not to scale)

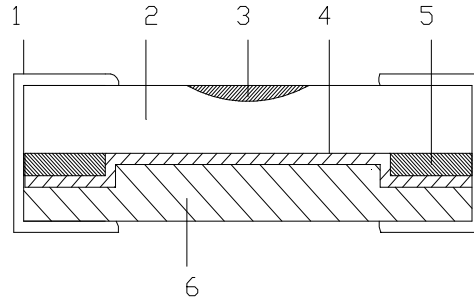

1. End Termination
  - a. Nickel Undercoat
  - b. Tin Overcoat
2. Ceramic Substrate (white)
3. Numeric Ampere Rating
4. Metal Film Fusible Element
5. Silver Termination Pad
6. Fused Glass Cover (green)

### 5.2 Nominal Dimensions


#### 5.2.1 End View (mm/inches)

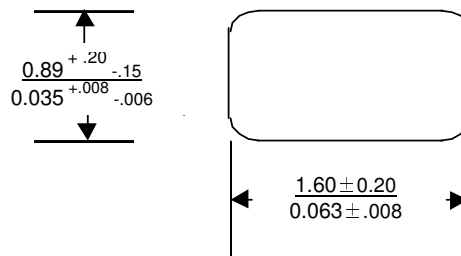


This bulletin is intended to clearly present comprehensive product data and provide technical information that will help the end user with design applications. Bussmann reserves the right, without notice, to change design or construction of any products and to discontinue or limit distribution of any products. Bussmann also reserves the right to change or update, without notice, any technical information contained in this bulletin. Once a product has been selected, it should be tested by the user in all possible applications.

Document No.:	EPS-CC12M		
Title:	CC12M		
Created By:	M. Joiner	Eng./Appr.:	V. Kalra
Date:	Sept 1, 2006	Sheet 5 of 9	

### 5.2.2 Top View (mm/inches)

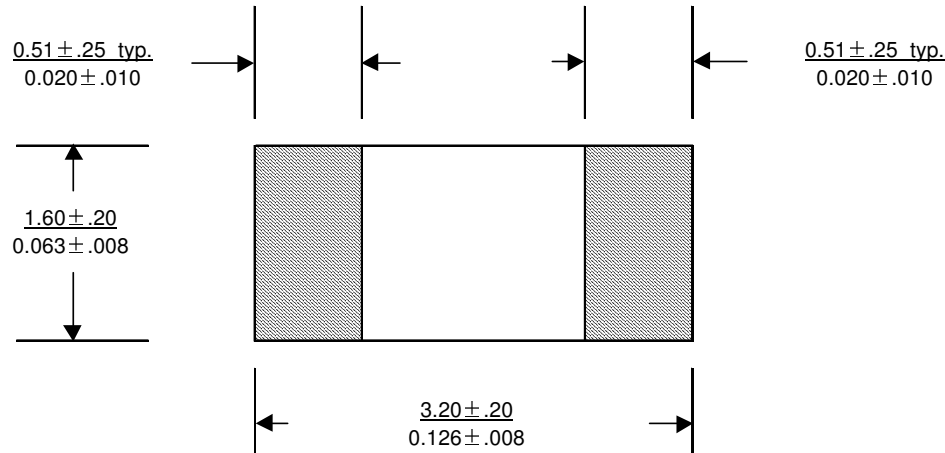

### 5.2.3 Side View (mm/inches)

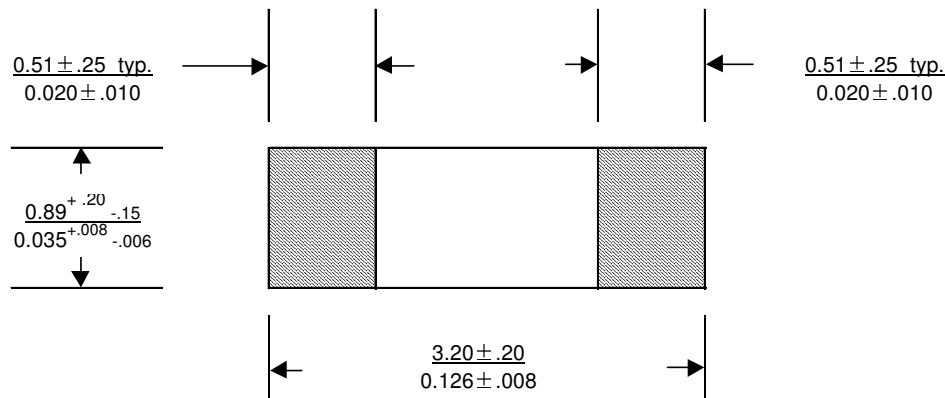

## 6.0 Electrical Specifications

### 6.1 Table of Electrical Specifications

Catalog Number	Ampere Rating	Voltage Rating	Interrupting Rating*	Typical Resistance** (ohms)	Typical I <sup>2</sup> T
CC12M10A	10A	24Vdc	150A	0.0045	2.0
CC12M12A	12A	24vdc	150A	0.0039	7.0
CC12M15A	15A	24Vdc	150A	0.0031	25.5
CC12M20A	20A	24Vdc	150A	0.0018	48.6

\*Measured at designated voltage, rise time of less than 50 microseconds, battery source

\*\*Measured at  $\leq 10\%$  of rated current

This bulletin is intended to clearly present comprehensive product data and provide technical information that will help the end user with design applications. Bussmann reserves the right, without notice, to change design or construction of any products and to discontinue or limit distribution of any products. Bussmann also reserves the right to change or update, without notice, any technical information contained in this bulletin. Once a product has been selected, it should be tested by the user in all possible applications.


<b>Document No.:</b>	EPS-CC12M		
<b>Title:</b>	CC12M		
<b>Created By:</b>	M. Joiner	<b>Eng./Appr.:</b>	V. Kalra
<b>Date:</b>	Sept 1, 2006	Sheet 6 of 9	

## 6.2 Operating Time Requirements

% of Rated Current	Operating Time Requirement
100%	4 hours minimum
350%	5 second maximum

Due to the high current rating of the fuse, solder pads and trace and/or wire sizes and placement can significantly affect operating times. Application testing is required.

## 6.3 Time Current Curve

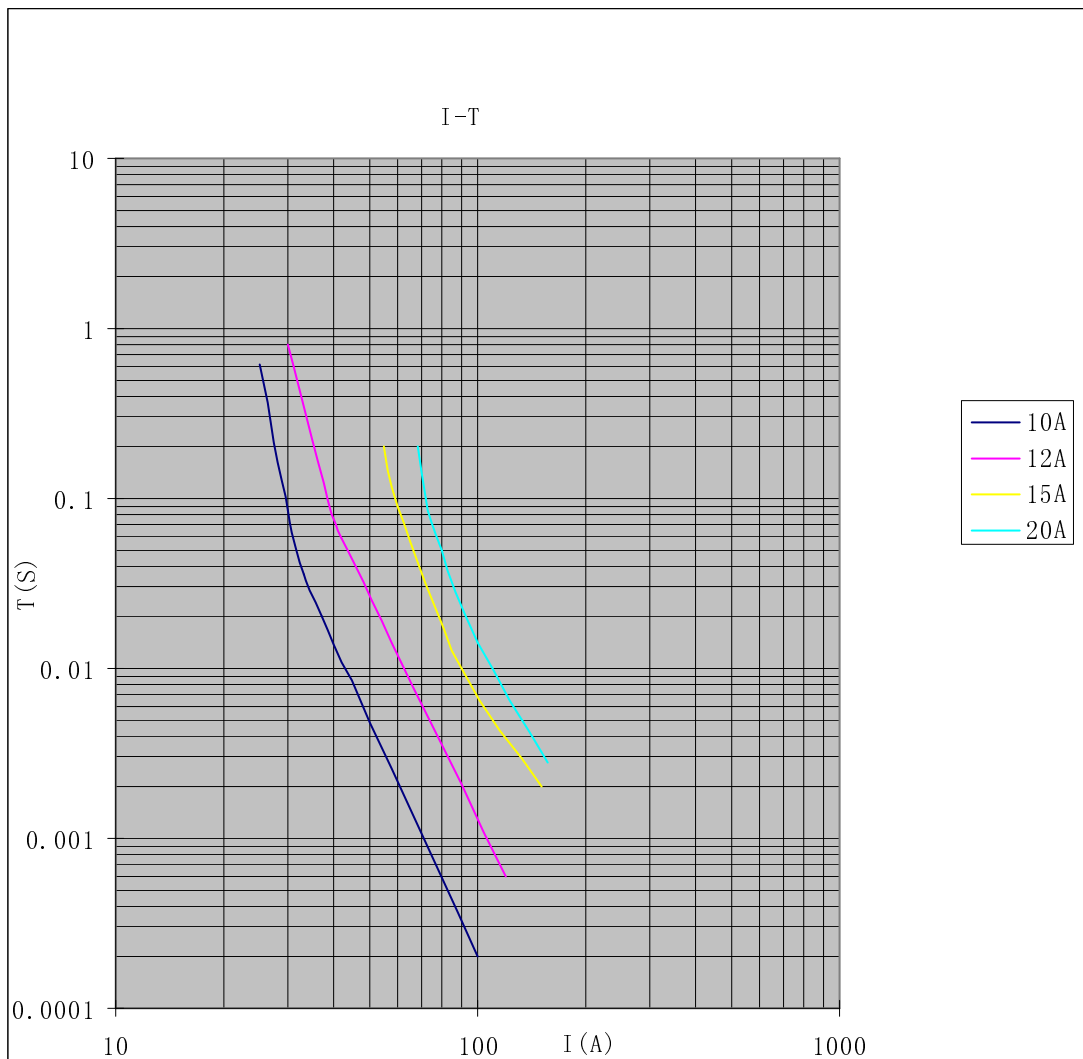

This bulletin is intended to clearly present comprehensive product data and provide technical information that will help the end user with design applications. Bussmann reserves the right, without notice, to change design or construction of any products and to discontinue or limit distribution of any products. Bussmann also reserves the right to change or update, without notice, any technical information contained in this bulletin. Once a product has been selected, it should be tested by the user in all possible applications.

<b>Document No.:</b>	EPS-CC12M		
<b>Title:</b>	CC12M		
<b>Created By:</b>	M. Joiner	<b>Eng./Appr.:</b>	V. Kalra
<b>Date:</b>	Sept 1, 2006	Sheet 7 of 9	

## 7.0 Agency Approvals



UL Recognition for US and Canada – File E19180

## 8.0 Marking Specification

8.1 Ampere rating to be marked on ceramic (white) side of fuse. Glass (green) side to be unmarked.

### 8.1.1 Table of device markings

<b>Catalog Symbol</b>	<b>Marking</b>
CC12M10A	10
CC12M12A	12
CC12M15A	15
CC12M20A	20

## 9.0 Soldering Recommendation(s)

### 9.1 Wave Solder

9.1.1 Reservoir Temperature: 260°C (500°F)

9.1.2 Time in Reservoir: 10 second maximum

### 9.2 Infrared Reflow

9.2.1 Reservoir Temperature: 260°C (500°F)

9.2.2 Time in Reservoir: 30 second maximum

## 10.0 Packaging Specification(s)

10.1 3,000 fuses on 8mm tape and reeled on a 7 inch (178mm) reel per EIA Standard RS481.

10.2 The fuses are oriented in embossed pockets with the ceramic (white) side facing up to facilitate proper mounting. It is recommended that fuses are mounted with the ceramic (white) side facing up.

This bulletin is intended to clearly present comprehensive product data and provide technical information that will help the end user with design applications. Bussmann reserves the right, without notice, to change design or construction of any products and to discontinue or limit distribution of any products. Bussmann also reserves the right to change or update, without notice, any technical information contained in this bulletin. Once a product has been selected, it should be tested by the user in all possible applications.


Document No.:	EPS-CC12M		
Title:	CC12M		
Created By:	M. Joiner	Eng./Appr.:	V. Kalra
Date:	Sept 1, 2006	Sheet 8 of 9	

## 11.0 Temperature De-Rating Curve

11.1 Normal Ambient Temperature:  $23^{\circ}\text{C} \pm 3^{\circ}\text{C}$  ( $74^{\circ}\text{F} \pm 3.6^{\circ}\text{F}$ )


11.2 Operating Temperature:  $-55^{\circ}\text{C}$  to  $125^{\circ}\text{C}$ , with proper correction factor applied

### 11.2.1 Chart of Correction Factor

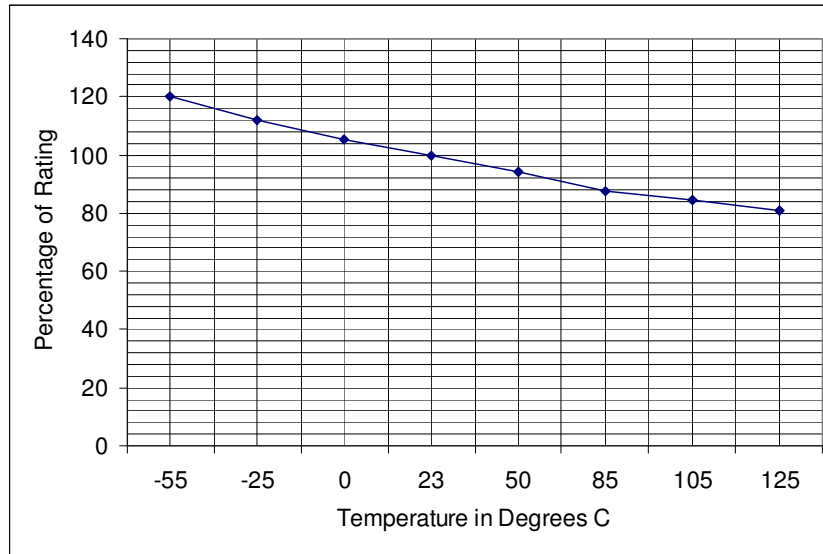

11.3 Storage Temperature:  $-55^{\circ}\text{C}$  to  $125^{\circ}\text{C}$

## 12 Process Flow Chart

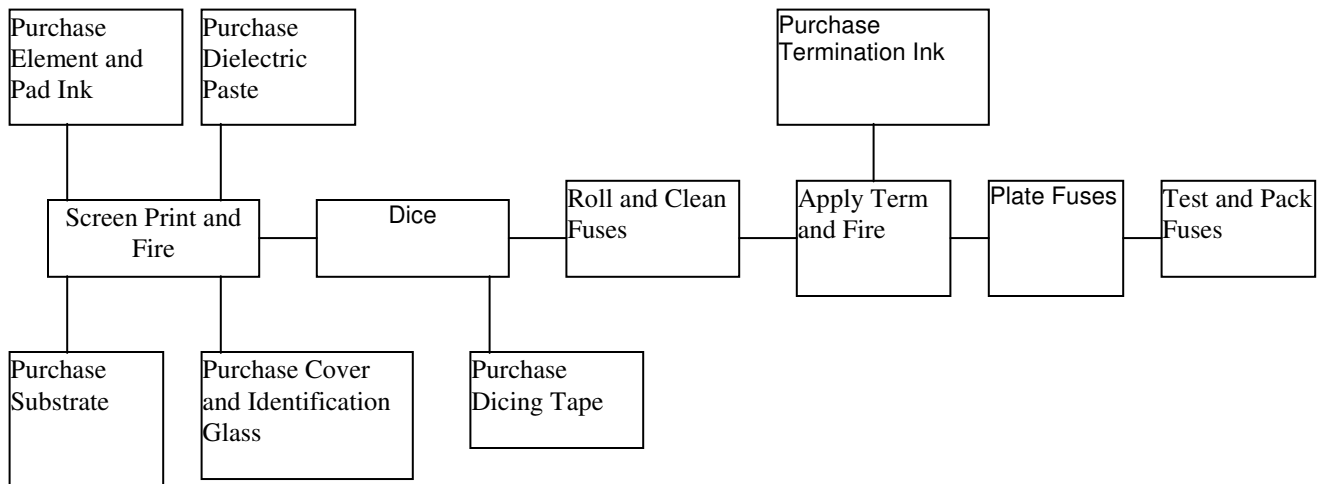

This bulletin is intended to clearly present comprehensive product data and provide technical information that will help the end user with design applications. Bussmann reserves the right, without notice, to change design or construction of any products and to discontinue or limit distribution of any products. Bussmann also reserves the right to change or update, without notice, any technical information contained in this bulletin. Once a product has been selected, it should be tested by the user in all possible applications.



<b>Document No.:</b>	EPS-CC12M		
<b>Title:</b>	CC12M		
<b>Created By:</b>	M. Joiner	<b>Eng./Appr.:</b>	V. Kalra
<b>Date:</b>	Sept 1, 2006	Sheet 9 of 9	

### 13 Environmental (Reliability) Data (based on CHIP Fuse Qualification Program)

13.1 Thermal Shock - MIL-STD-202, Method 107, Test Condition B (-65°C to 125°C)

13.2 Vibration - MIL-STD-202, Method 204, Test Condition C (55 to 2000 Hz, 10G)

13.3 Moisture Resistance - MIL-STD-202, Method 106, 10 day cycle

13.4 Solderability - ANSI/J-STD-002, Test B

14 End

This bulletin is intended to clearly present comprehensive product data and provide technical information that will help the end user with design applications. Bussmann reserves the right, without notice, to change design or construction of any products and to discontinue or limit distribution of any products. Bussmann also reserves the right to change or update, without notice, any technical information contained in this bulletin. Once a product has been selected, it should be tested by the user in all possible applications.

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Specialty Fuses](#) category:*

*Click to view products by [Eaton](#) manufacturer:*

Other Similar products are found below :

[63NZ02GL](#) [80NH00GR-6](#) [FWP-32A14F](#) [12LCT](#) [ECF-1](#) [ECF-2](#) [ECF-3](#) [ECF-4](#) [170M3809D](#) [N-2-1/2](#) [N-3-2/10](#) [NITD2](#) [16D27SB](#) [16FC](#)  
[170M1564D](#) [170M4241](#) [ESD63](#) [ABS-30](#) [ABS-8](#) [FWP-25A14FI](#) [FWP-80A22FI](#) [30CIF06](#) [32CMLC](#) [32NH00AM-6](#) [TDC180-2](#) [TPL-BL](#)  
[TPS-5](#) [KLC40](#) [WKL](#) [NITD25](#) [04450080FX850](#) [NITD16](#) [LA60Q152](#) [LA60Q402](#) [ECF-5](#) [TDC180-10](#) [TDC180-7](#) [TPM-25](#) [3AG-312](#)  
[16NHG000B](#) [170M3509](#) [DEO200](#) [DD200M250](#) [BP/S-6-1/4](#) [170M3510](#) [TPH-300](#) [EFS200](#) [170M0161](#) [170M6016](#) [BK/F02B-1/2A](#)