


ECMT1V17

Common mode choke, through-hole



Product features

- Closed magnetic path reduces conductive EMI emission
- High impedance and inductance values
- Robust construction
- High voltage isolation
- Independent winding sections
- Rated voltage: 250 Vac

Applications

- Industrial IoT equipment
- Motion controls
- Power supplies
- Battery backup
- Renewable energy products
- Smart meters
- Solar/wind generators, inverters, charger controllers
- Medical equipment
- High tech consumer products
- Appliances

Environmental compliance and general specifications

- Storage temperature range (Component): -40 °C to +85 °C
- Operating temperature range: -40 °C to +125 °C (ambient plus self-temperature rise)
- Wave solder temperature: +260 °C maximum



Product specifications

Part number ⁷	OCL ¹ (mH) minimum (1-2), (4-3)	DCR ² (Ω) maximum (1-2), (4-3) @ +25 °C	I _{rms} ³ (A) (1-4) short 2,3	SRF (kHz) minimum	Hi-pot ⁴ (Vac)	Hi-pot ⁵ (Vac)	Insulation resistance ⁶ (MΩ) minimum
ECMT1V1717S-1R0-R	1.0	0.1	1.0	792	1500	1000	100
ECMT1V1714H-1R0-R	1.0	0.1	1.0	792	1500	1000	100
ECMT1V1717S-2R0-R	2.0	0.3	1.4	896	1500	1000	100
ECMT1V1714H-2R0-R	2.0	0.3	1.4	896	1500	1000	100
ECMT1V1717S-5R0-R	5.0	0.3	1.4	712	1500	1000	100
ECMT1V1714H-5R0-R	5.0	0.3	1.4	712	1500	1000	100
ECMT1V1717S-8R0-R	8.0	1.0	0.8	456	1500	1000	100
ECMT1V1714H-8R0-R	8.0	1.0	0.8	456	1500	1000	100
ECMT1V1717S-100-R	10	0.6	1.2	423	1500	1000	100
ECMT1V1714H-100-R	10	0.6	1.2	423	1500	1000	100
ECMT1V1717S-150-R	15	0.6	1.0	408	1500	1000	100
ECMT1V1714H-150-R	15	0.6	1.0	408	1500	1000	100
ECMT1V1717S-200-R	20	1.0	0.8	295	1500	1000	100
ECMT1V1714H-200-R	20	1.0	0.8	295	1500	1000	100
ECMT1V1717S-300-R	30	1.6	0.6	276	1500	1000	100
ECMT1V1714H-300-R	30	1.6	0.6	276	1500	1000	100
ECMT1V1717S-330-R	33	2.7	0.5	240	1500	1000	100
ECMT1V1714H-330-R	33	2.7	0.5	240	1500	1000	100
ECMT1V1717S-350-R	35	2.0	0.5	312	1500	1000	100
ECMT1V1714H-350-R	35	2.0	0.5	312	1500	1000	100
ECMT1V1717S-400-R	40	2.0	0.5	216	1500	1000	100
ECMT1V1714H-400-R	40	2.0	0.5	216	1500	1000	100
ECMT1V1717S-470-R	47	2.0	0.5	192	1500	1000	100
ECMT1V1714H-470-R	47	2.0	0.5	192	1500	1000	100
ECMT1V1717S-500-R	50	2.0	0.5	176	1500	1000	100
ECMT1V1714H-500-R	50	2.0	0.5	176	1500	1000	100
ECMT1V1717S-600-R	60	3.3	0.4	144	1500	1000	100
ECMT1V1714H-600-R	60	3.3	0.4	144	1500	1000	100
ECMT1V1717S-850-R	85	5.7	0.3	85	1500	1000	100
ECMT1V1714H-850-R	85	5.7	0.3	85	1500	1000	100

1. Open circuit inductance (OCL) Test parameters: 1 kHz, 0.25 Vrms, 0.0 Adc, +25 °C

2. DCR Test parameters: 4-wire method measured from the root of base, +25 °C

3. I_{rms}³: Maximum DC current for an approximate temperature rise of 40 °C without core loss. Derating is necessary for AC currents. PCB layout, trace thickness and width, air-flow, and proximity of other heat generating components will affect the temperature rise. It is recommended that the temperature of the part not exceed +125 °C under worst case operating conditions verified in the end application.

4. Hi-pot: Coil-Coil, 2 seconds, 5 mA

5. Hi-pot: Coil-Core, 2 seconds, 5 mA

6. Insulation Resistance: Coil-Coil and Coil-Core, at 500 Vdc

7. Part Number Definition: ECMT1Vxxxx-yyy-R

ECMT1V = Product code

xxxx= Size indicator


yy= Orientation H= horizontal, S= vertical

yyy=Inductance value in mH, R= decimal point, If no R is present last digit indicates number of zeros


-R= RoHS compliant

Mechanical parameters, schematic, pad layout (mm)


ECMT1V1717S-xxx-R

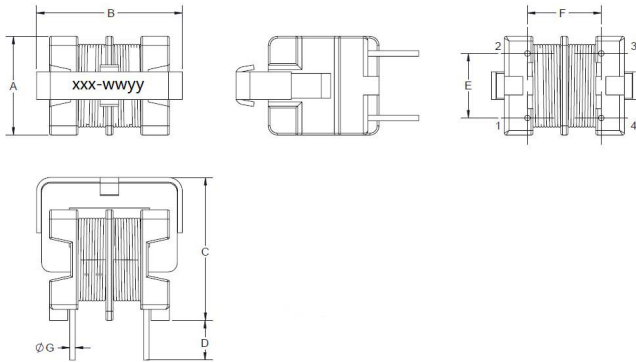


Recommended PCB layout




Schematic




ECMT1V1714H-xxx-R

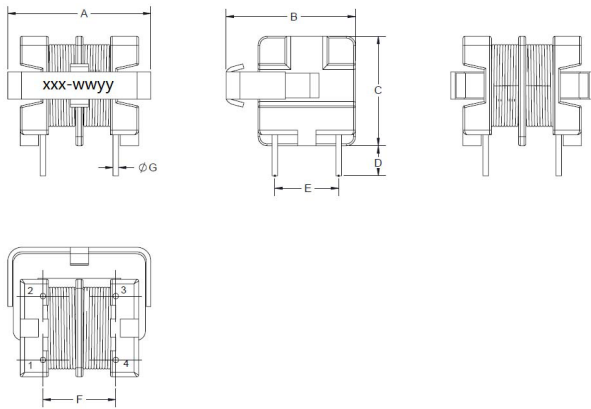

Recommended PCB layout



Schematic



Part number	A	B	C	D	E	F	G
ECMT1V1717S-xxx-R	12.0 max.	17.0 max.	17.0 max.	3.5 ± 0.5	7.0 ± 0.5	8.0 ± 0.5	0.6 ± 0.1
ECMT1V1714H-xxx-R	17.0 max.	16.0 max.	14.0 max.	3.5 ± 0.5	7.0 ± 0.5	8.0 ± 0.5	0.6 ± 0.1


Part marking: xxx-wyyy, xxx = inductance value in mH, wyyy = lot code
Trace or vias underneath the inductor is not recommended

Packaging information (mm)

ECMT1V1717S-xxx-R

Supplied in tray, 14 trays per carton. (88 parts per tray x 14 trays per box = 1232 parts per carton)


(Tray height 17 mm)

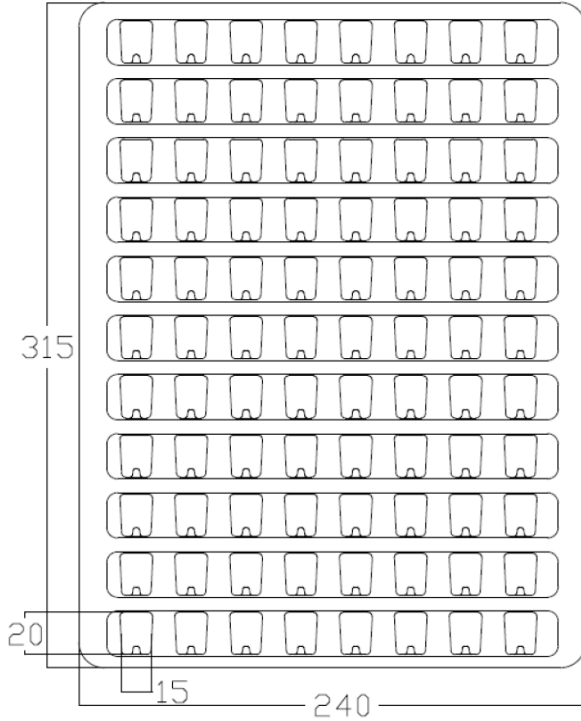







ECMT1V1714H-xxx-R

Supplied in tray, 12 trays per carton. (88 parts per tray x 12 trays per box = 1056 parts per carton)







(Tray height 19 mm)

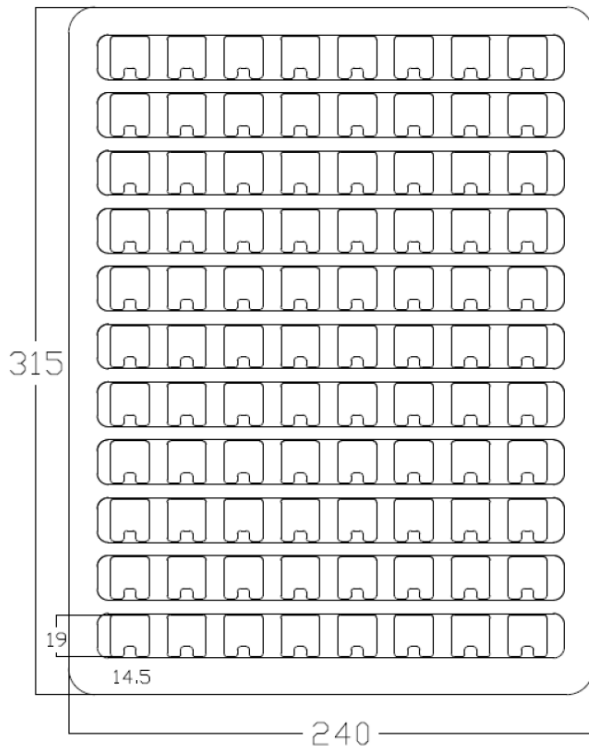




Impedance vs frequency

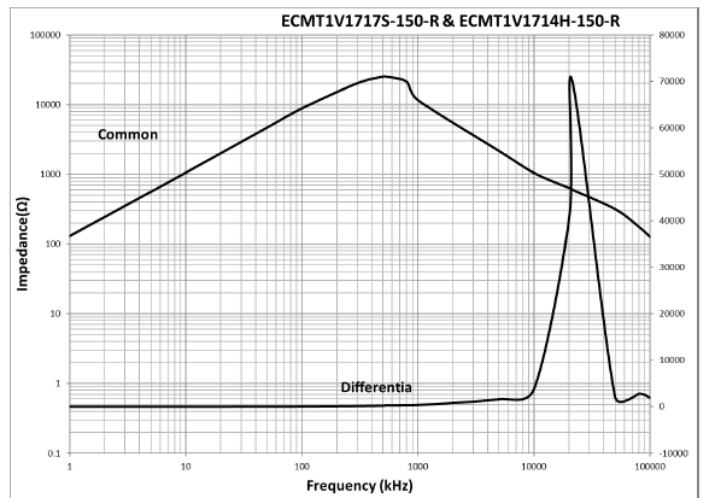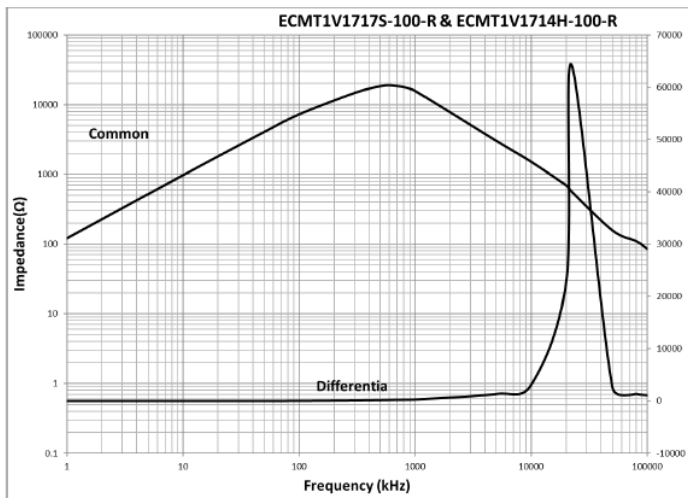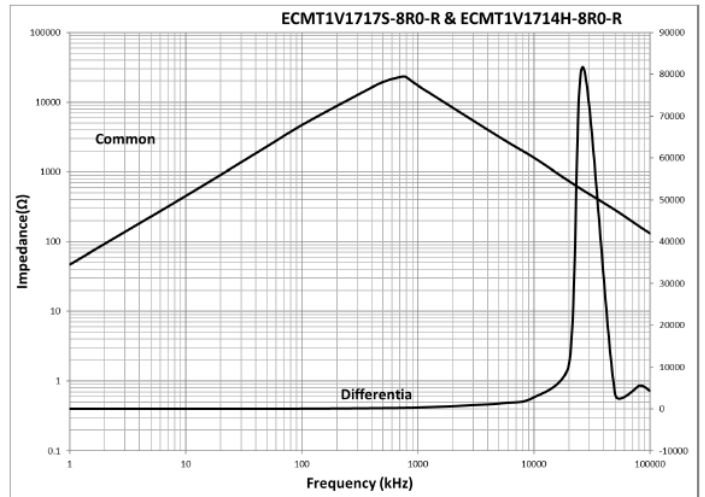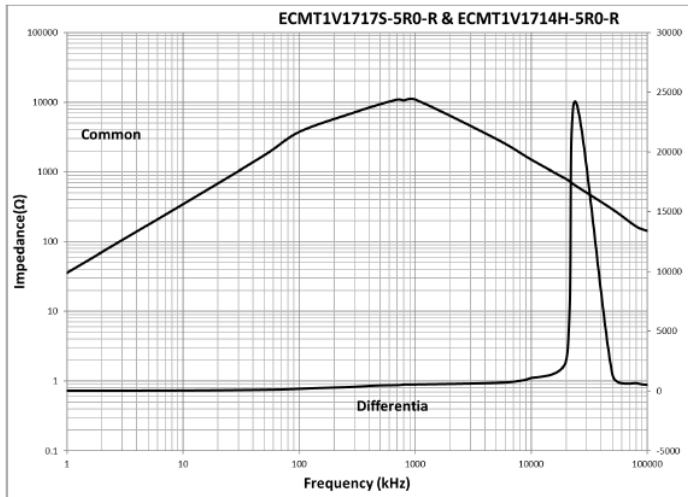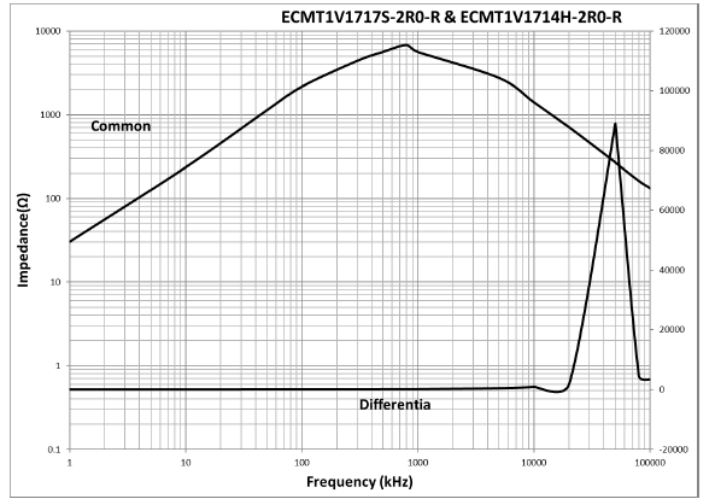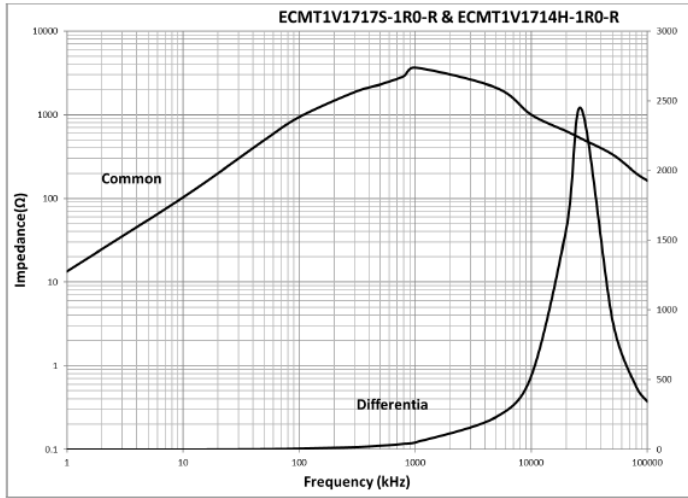


Impedance vs frequency

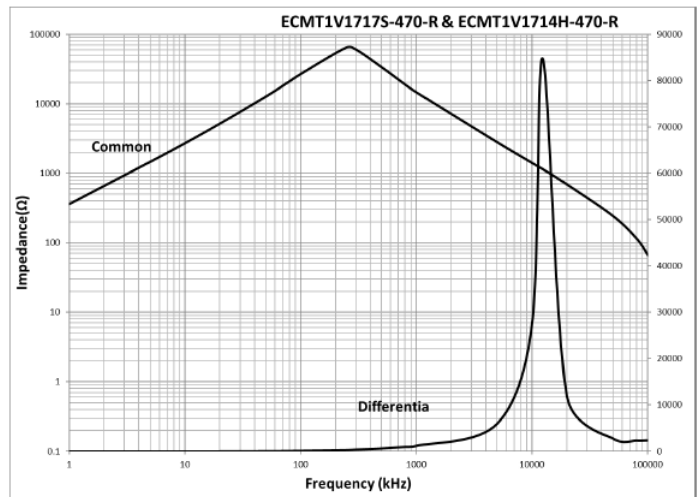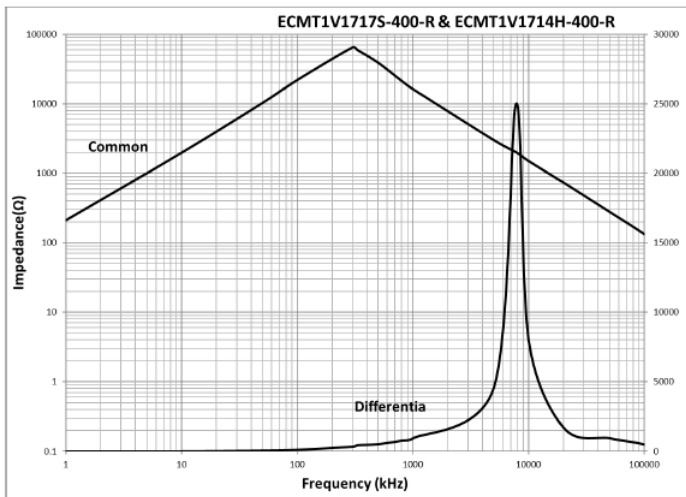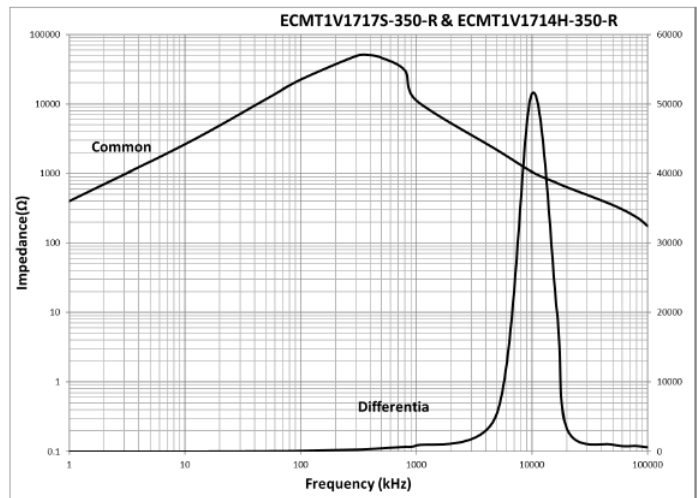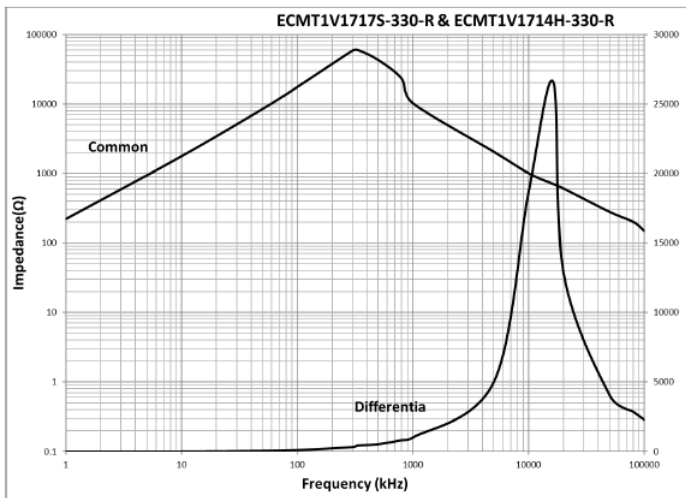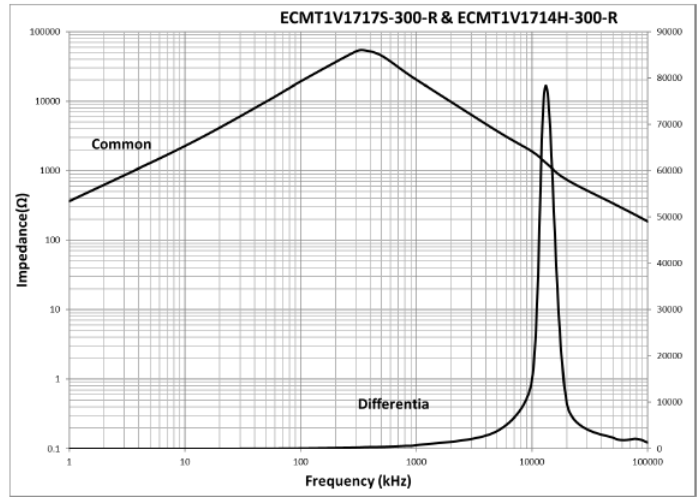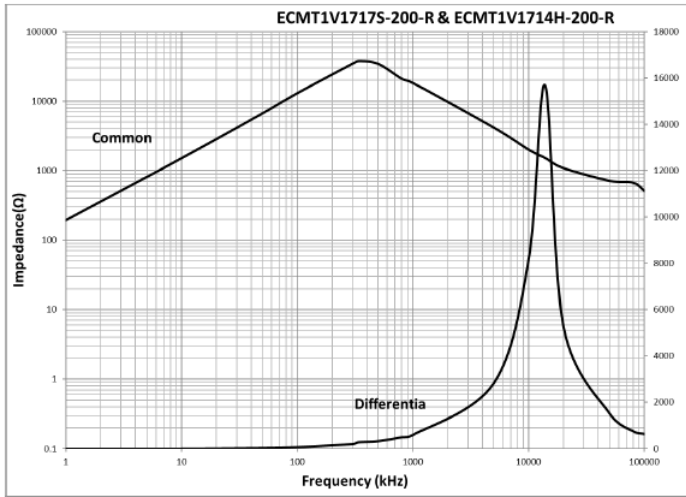


Impedance vs frequency

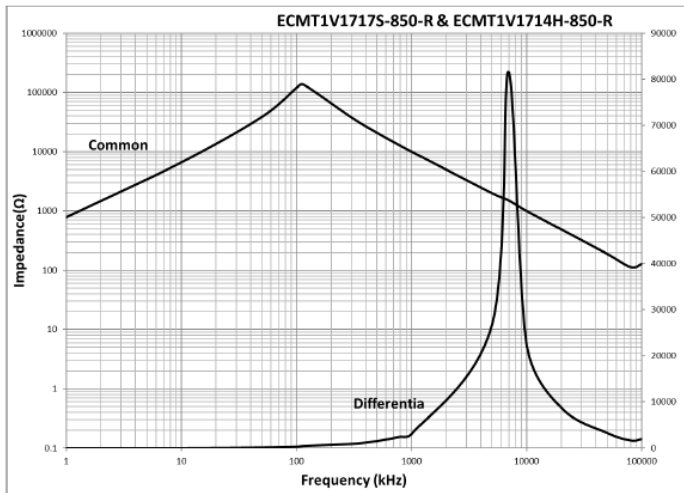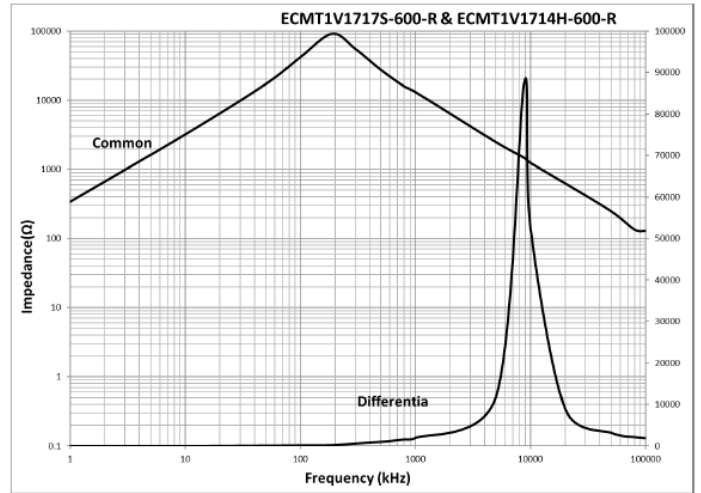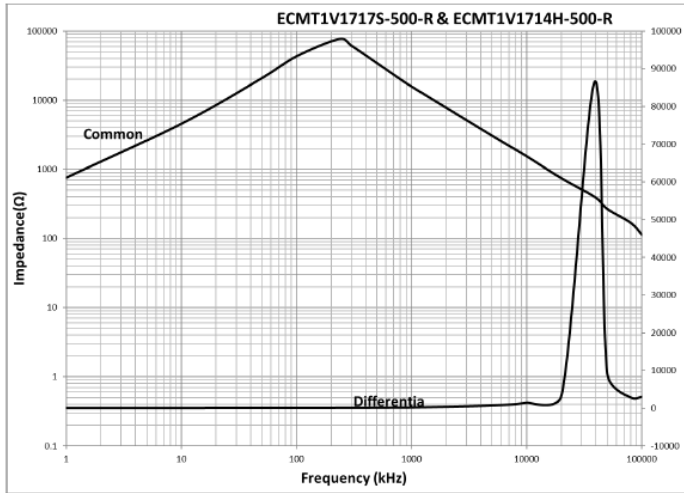

Measurement method






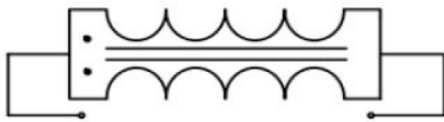


Common Mode






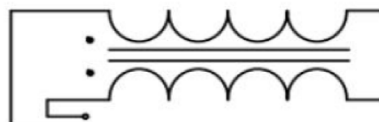


Differential Mode




Inductance vs frequency

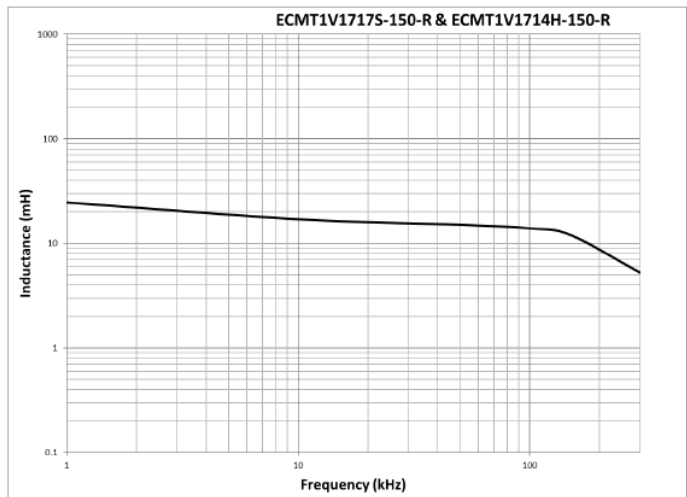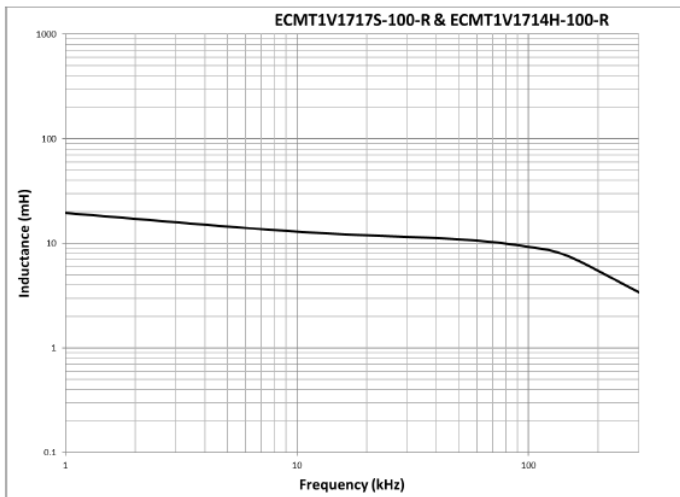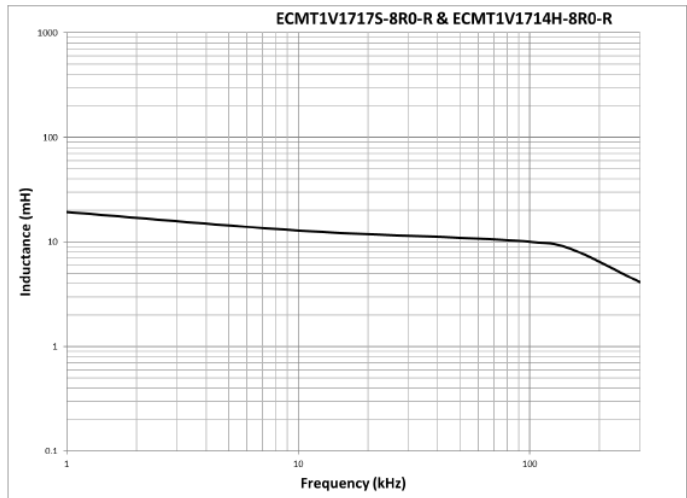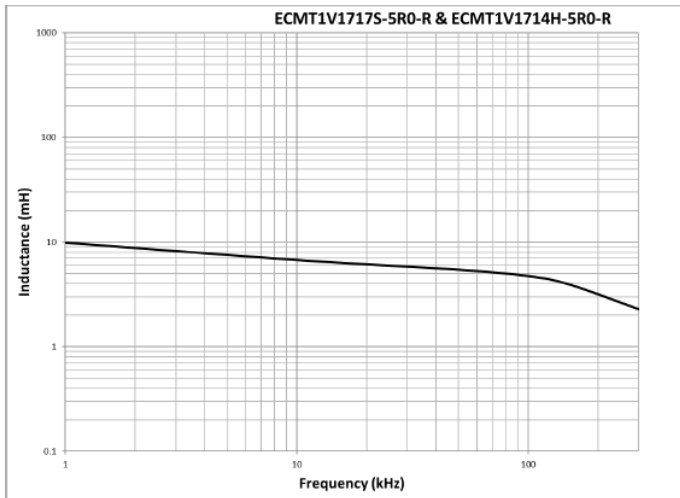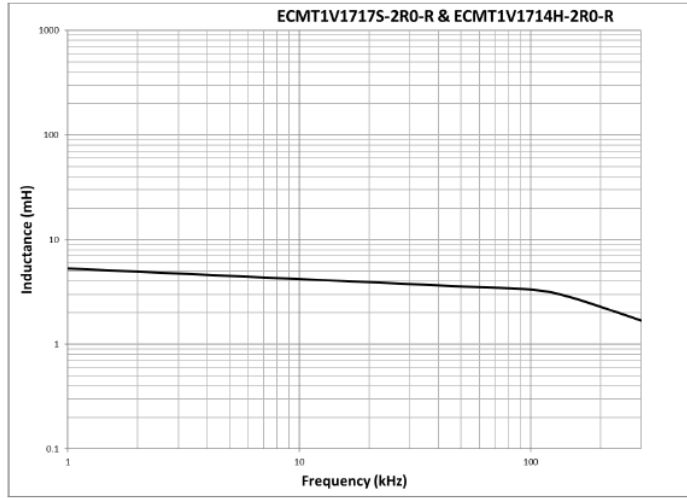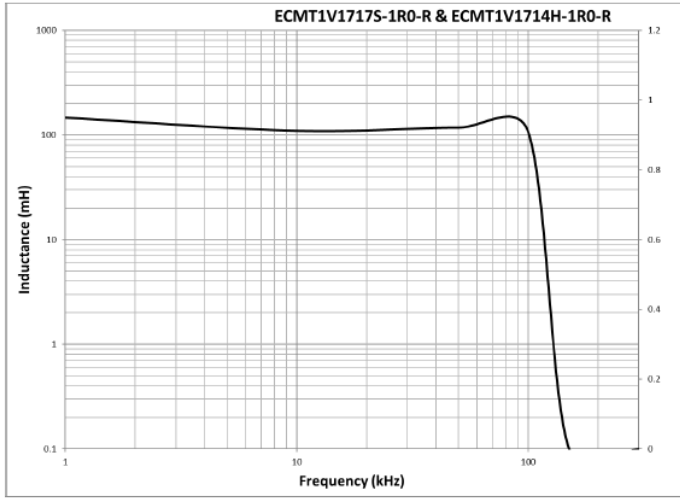


Inductance vs frequency

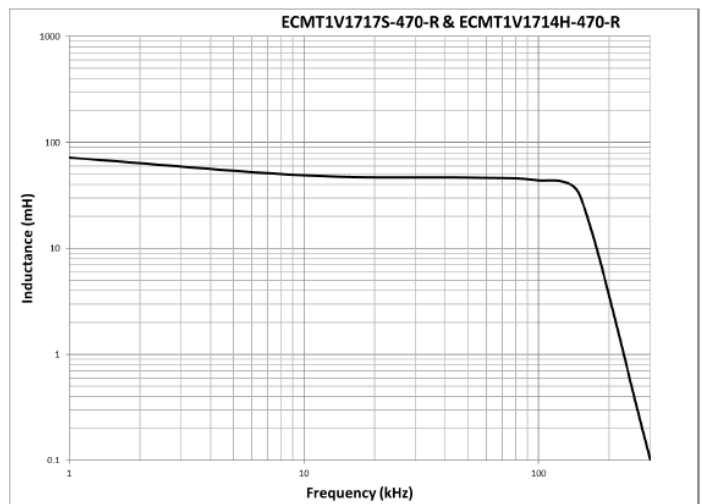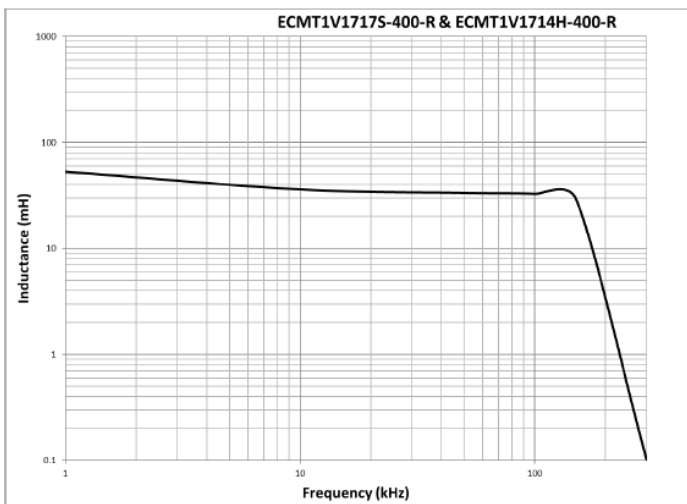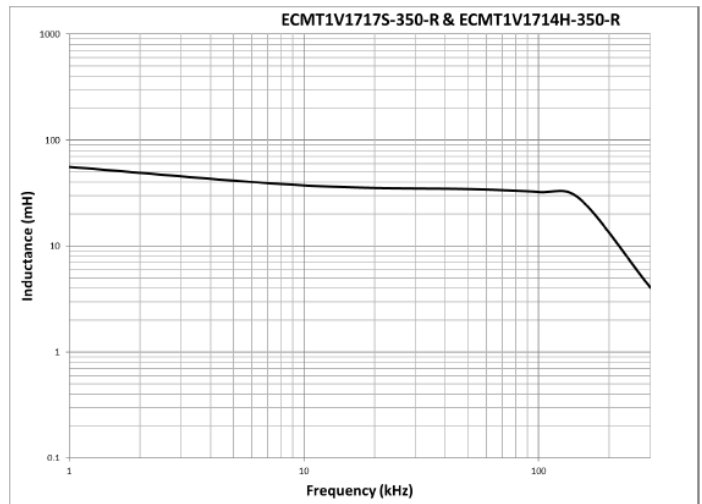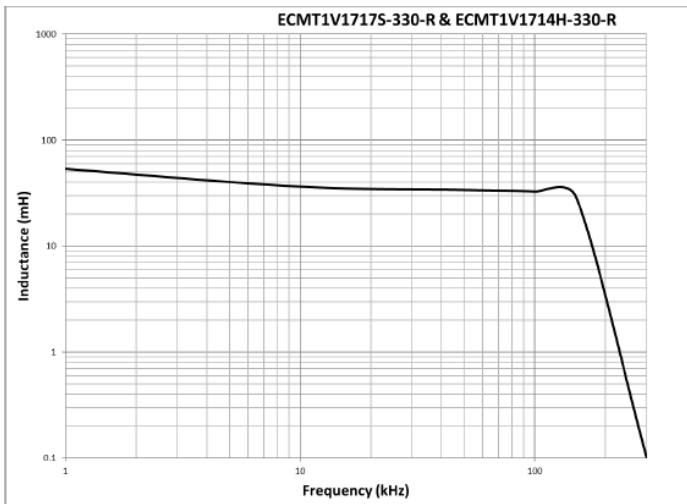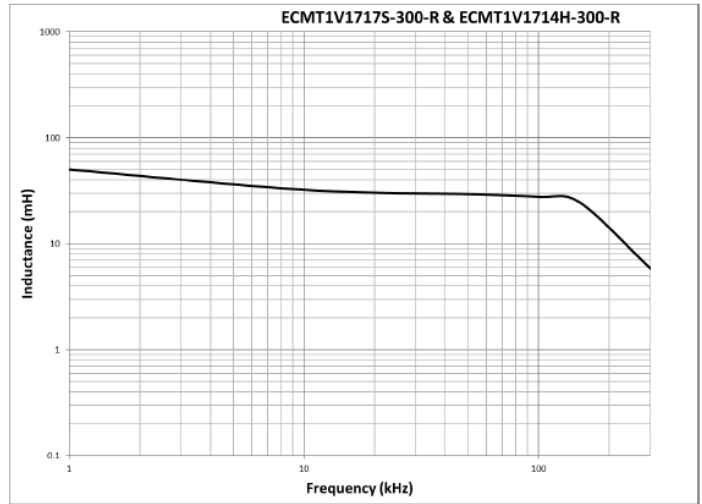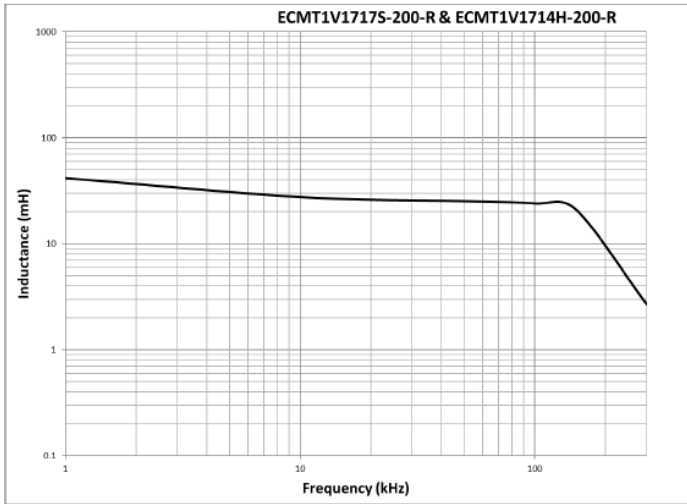

Inductance vs frequency

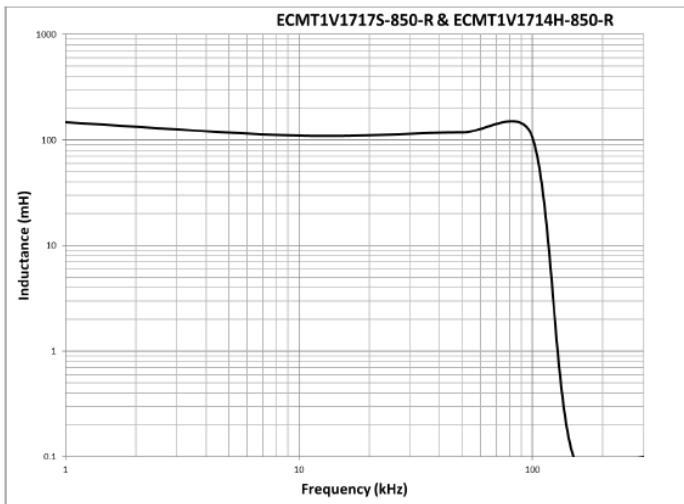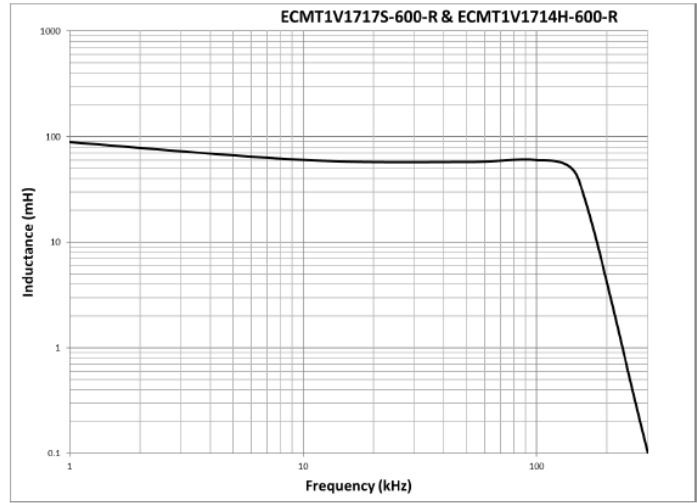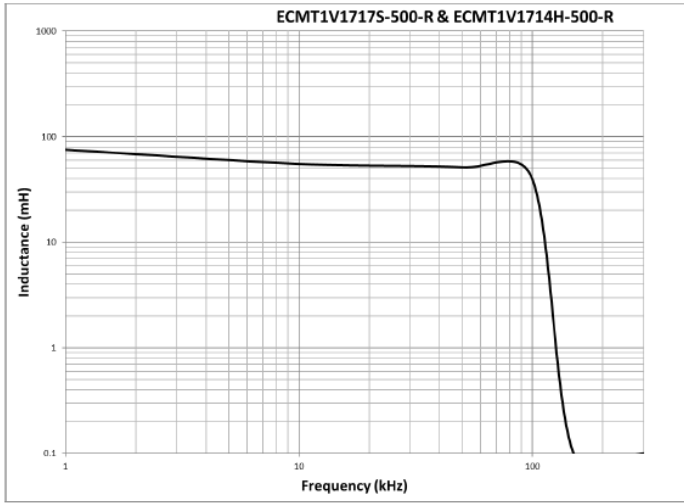

Wave solder profile

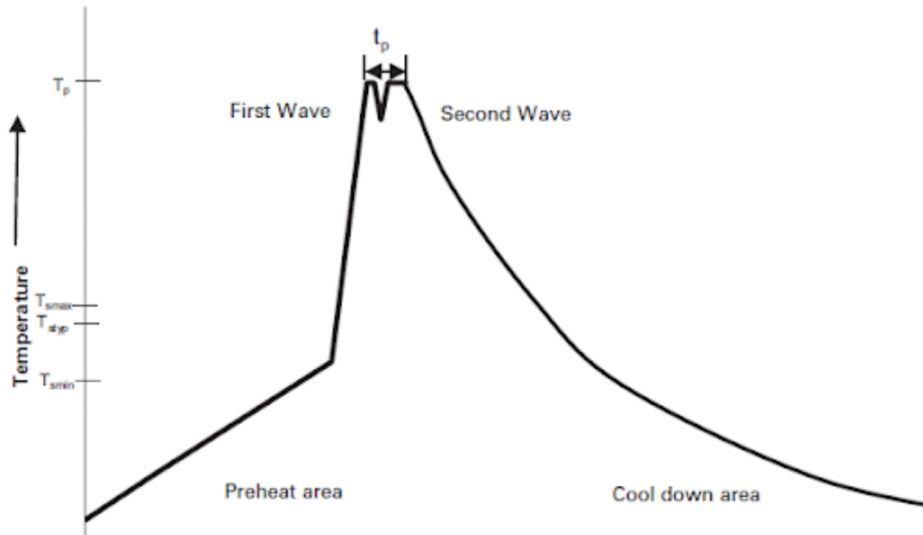

Reference EN 61760-1:2006

Profile feature	Standard SnPb solder	Lead (Pb) free solder
Preheat		
• Temperature min. (T_{smin})	100 °C	100 °C
• Temperature typ. (T_{styp})	120 °C	120 °C
• Temperature max. (T_{smax})	130 °C	130 °C
• Time (T_{smin} to T_{smax}) (t_s)	70 seconds	70 seconds
Δ preheat to max Temperature	150 °C max.	150 °C max.
Peak temperature (T_p)*	235 °C – 260 °C	250 °C – 260 °C
Time at peak temperature (t_p)	10 seconds max 5 seconds max each wave	10 seconds max 5 seconds max each wave
Ramp-down rate	~ 2 K/s min ~3.5 K/s typ ~5 K/s max	~ 2 K/s min ~3.5 K/s typ ~5 K/s max
Time 25 °C to 25 °C	4 minutes	4 minutes

Manual solder

+350 °C, 4-5 seconds. (by soldering iron), generally manual, hand soldering is not recommended.

Life Support Policy: Eaton does not authorize the use of any of its products for use in life support devices or systems without the express written approval of an officer of the Company. Life support systems are devices which support or sustain life, and whose failure to perform, when properly used in accordance with instructions for use provided in the labeling, can be reasonably expected to result in significant injury to the user.

Eaton reserves the right, without notice, to change design or construction of any products and to discontinue or limit distribution of any products. Eaton also reserves the right to change or update, without notice, any technical information contained in this bulletin.

Eaton
Electronics Division
1000 Eaton Boulevard
Cleveland, OH 44122
United States
www.eaton.com/electronics

© 2021 Eaton
All Rights Reserved
Printed in USA
Publication No. ELX1092 BU-ELX21102
September 2021

Eaton is a registered trademark.
All other trademarks are property of their respective owners.

Follow us on social media to get the latest product and support information.



X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Common Mode Chokes / Filters](#) category:

Click to view products by [Eaton](#) manufacturer:

Other Similar products are found below :

[74279408](#) [PE-62911NL](#) [PE-64683](#) [ST6118T-R](#) [T8114NLT](#) [RD5122-10-6M0](#) [TCM0806G-350-2P-T](#) [TCM0806G-650-2P-T](#) [IND-0110](#)
[UAL21V07012500](#) [UAL21VR0802000](#) [UAL24VR06500CH](#) [UALSC023000000](#) [UALSC1020JH000](#) [UALSC1520JH000](#)
[UALSU16VD30030](#) [UALSU16VD40010](#) [UALSU9H0305000](#) [UALSU9HF060300](#) [UALSU9VD070100](#) [36-00037](#) [5701610000](#)
[UALW21HS072450](#) [UALSU9VD070400](#) [UALSU9HF050500](#) [UALSU9H0208000](#) [UALSCF25081300](#) [UAL24VK06450CH](#)
[PLT10HH501100PNB](#) [PLT10HH401100PNB](#) [PLT10HH1026R0PNB](#) [PE-67531](#) [EXC-X4CH120X](#) [TLH10UB 113 0R5](#) [2752041447](#)
[2752045447](#) [CMS3-11-R](#) [7351V](#) [CMF16-153131](#) [744252510](#) [T8116NLT](#) [FE2X10-4-2NL](#) [744253200](#) [744253101](#) [744252220](#) [TX8111NLT](#)
[UAL30VR3500470](#) [CTX01-19077-R](#) [T8003NLT](#) [CTX01-13663](#)