

HCM1A1 104

Automotive grade High current power inductors



Product features

- AEC-Q200 Grade 1 qualified
- High current carrying capacity
- Magnetically shielded, low EMI
- Frequency range up to 1 MHz
- Inductance range from 0.2 μ H to 100 μ H
- Current range from 1.5 A to 40 A
- 11.5 mm x 10.3 mm footprint surface mount-package in a 4.0 mm height
- Alloy powder core material
- Moisture Sensitivity Level (MSL): 1
- Halogen free, lead free, RoHS compliant

Applications

- Body electronics
 - Central body control module
 - Vehicle access control system
 - Headlamps, tail lamps and interior lighting
 - Heating ventilation and air conditioning controllers (HVAC)
 - Doors, window lift and seat control
- Advanced driver assistance systems
 - Adaptive cruise control (ACC)
 - Automatic parking control
 - Collision avoidance system/ Car black box system
- Infotainment and cluster electronics
 - Audio subsystem: head unit and trunk amp
 - Digital instrument cluster
 - In-vehicle infotainment (IVI) and navigation
 - Port power/USB HUB for front and rear passengers
- Chassis and safety electronics
 - Airbag control unit
 - Electronic stability control system (ESC)
 - Electric parking brake
- Engine and Powertrain Systems
 - Electric pumps, motor control and auxiliaries
 - Powertrain control module (PCU)/Engine Control unit (ECU)
 - Transmission Control Unit (TCU)

Environmental Data

- Storage temperature range (Component): -55 °C to +155 °C
- Operating temperature range: -55 °C to +155 °C (ambient plus self-temperature rise)
- Solder reflow temperature: J-STD-020 (latest revision) compliant





Product Specifications

Part Number ⁶	OCL ¹ (μH) $\pm 20\%$	FLL ² (μH) minimum	I_{rms}^3 (A)	I_{sat}^4 (A)	DCR (m Ω) typical @ +20 °C	DCR (m Ω) maximum @ +20 °C	K-factor ⁵
HCM1A1104-R20-R	0.20	0.13	33	40	0.63	0.72	902
HCM1A1104-R36-R	0.36	0.23	26	33	1.04	1.20	595
HCM1A1104-R45-R	0.45	0.29	25	32	1.07	1.23	490
HCM1A1104-R47-R	0.47	0.30	28.5	35	1.10	1.27	435
HCM1A1104-R56-R	0.56	0.36	22.5	24	1.56	1.8	453
HCM1A1104-R90-R	0.90	0.58	20	22	2.17	2.5	309
HCM1A1104-1R0-R	1.0	0.64	16	20	2.95	3.3	263
HCM1A1104-1R5-R	1.5	0.96	14	17	3.80	4.2	232
HCM1A1104-2R2-R	2.2	1.41	10.5	16	6.00	7.0	170
HCM1A1104-3R3-R	3.3	2.11	8.2	11.5	10.8	11.8	163
HCM1A1104-4R7-R	4.7	3.01	6.5	9.0	15	18	138
HCM1A1104-5R6-R	5.6	3.58	6.6	9.0	14	17	116
HCM1A1104-6R8-R	6.8	4.35	6.4	9.0	16	19	112
HCM1A1104-100-R	10	6.40	5.0	6.0	27	30	74
HCM1A1104-150-R	15	9.60	3.8	6.8	45	50	69
HCM1A1104-220-R	22	14.1	3.2	6.0	58	65	64
HCM1A1104-330-R	33	21.1	2.8	4.8	92	105	44
HCM1A1104-470-R	47	30.1	1.9	3.6	165	181	36
HCM1A1104-101-R	100	64.0	1.5	2.0	270	300	26


- Open Circuit Inductance (OCL) Test Parameters: 100 kHz, 0.25 V_{rms}, 0.0 Adc, +25 °C
- Full Load Inductance (FLL) Test Parameters: 100 kHz, 0.25 V_{rms}, I_{sat}, +25 °C
- I_{rms}: DC current for an approximate temperature rise of 30 °C without core loss. Derating is necessary for AC currents. PCB layout, trace thickness and width, air-flow, and proximity of other heat generating components will affect the temperature rise. It is recommended that the temperature of the part not exceed 155 °C under worst case operating conditions verified in the end application.

- I_{sat}: Peak current for approximately 20% rolloff @ +25 °C
- K-factor: Used to determine B_{pp} for core loss (see graph). B_{p-p} = K * L * ΔI . B_{pp}: (Gauss), K: (K-factor from table), L: (Inductance in μH), ΔI (Peak to peak ripple current in Amps).
- Part Number Definition: HCM1A1104-xxx-R
HCM1A1104 = Product code and size
xxx= inductance value in μH , R= decimal point,
If no R is present then last character equals number of zeros
-R suffix = RoHS compliant


Dimensions (mm)

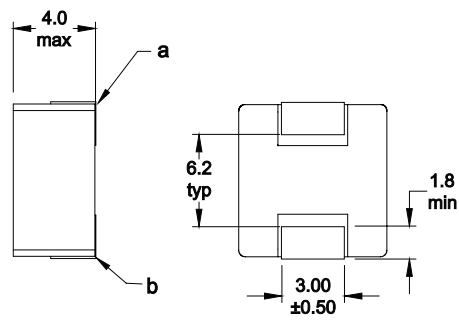

Recommended Pad Layout



Schematic




Part marking: 1AXXX=automotive grade, XXX=inductance value in μH , R=decimal point. If no R is present then last character equals number of zeros.
xxxx=Lot code
All soldering surfaces to be coplanar within 0.1 millimeters
Tolerances are ± 0.3 millimeters unless stated otherwise
DCR measured from point "a" to point "b"
Color: Grey
Do not route traces or vias underneath the inductor



Packaging information (mm)

Drawing not to scale







Supplied in tape and reel packaging, 500 parts per 13" diameter reel

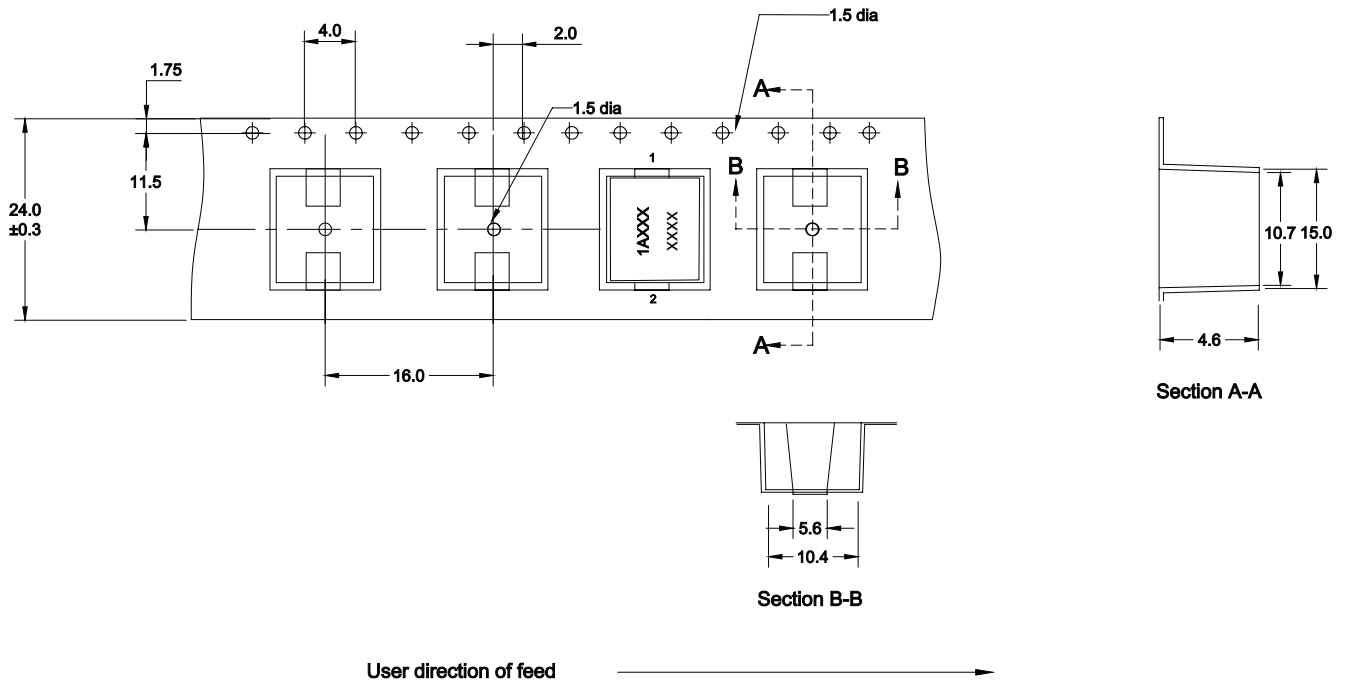







Core loss vs B_{p-p}

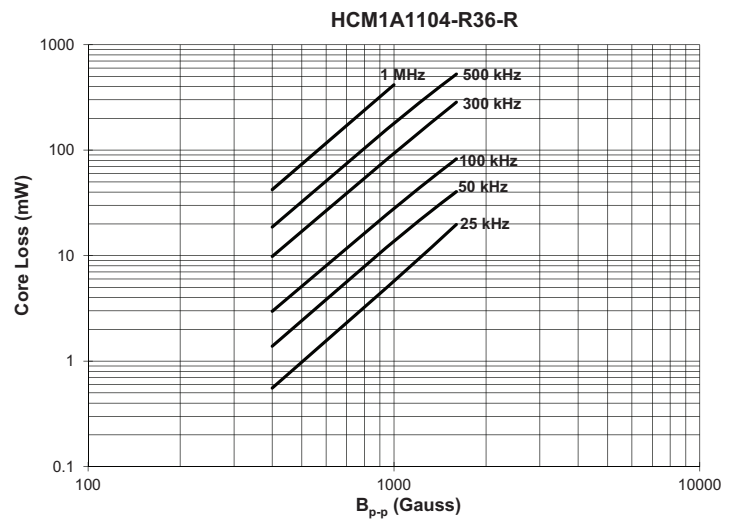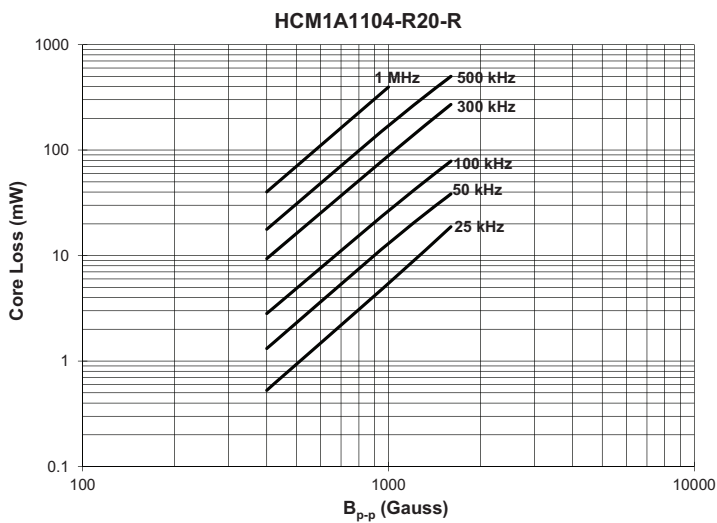






Core loss vs B_{p-p}

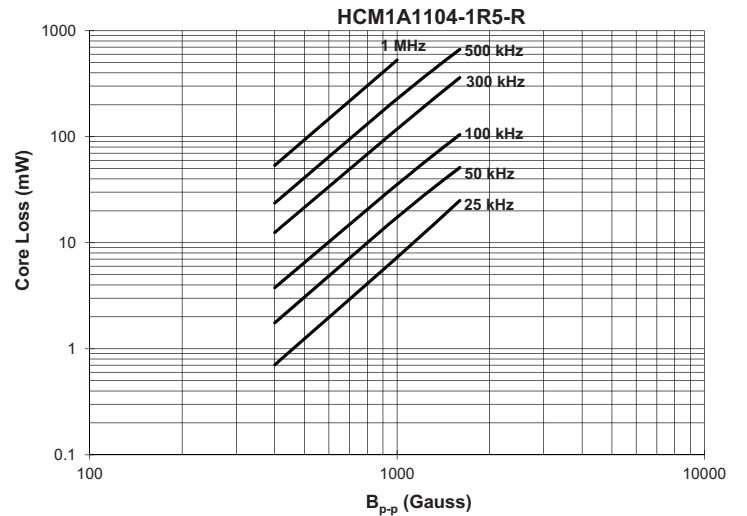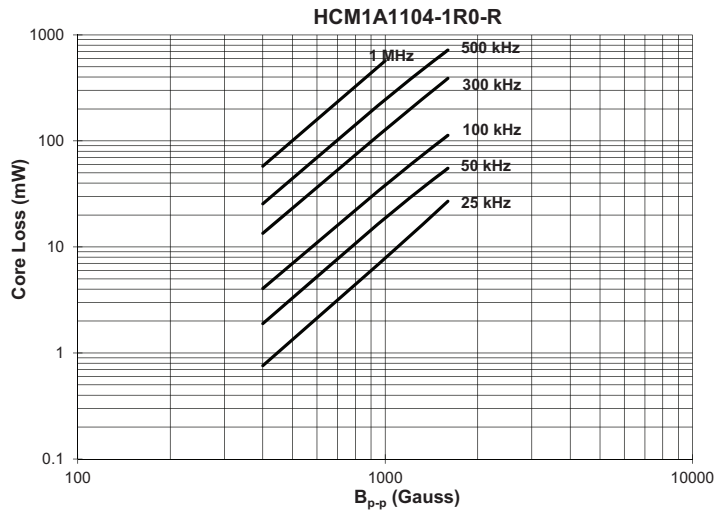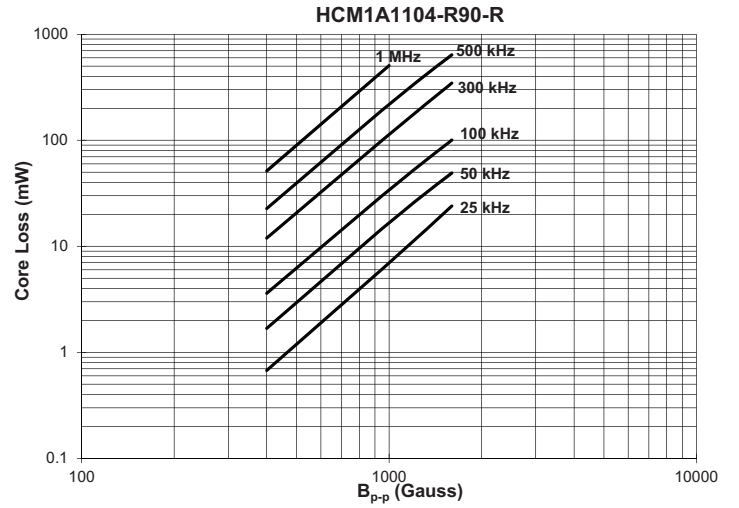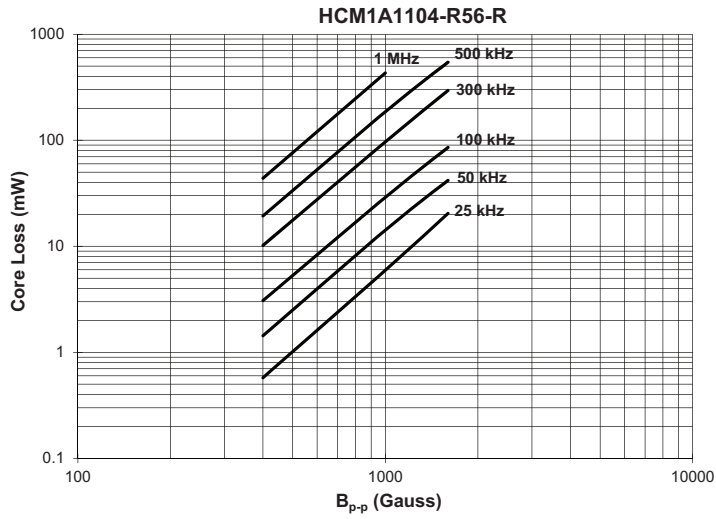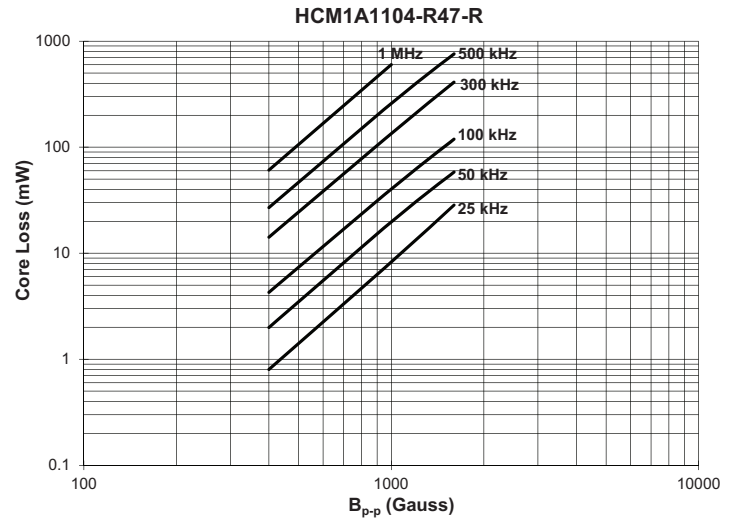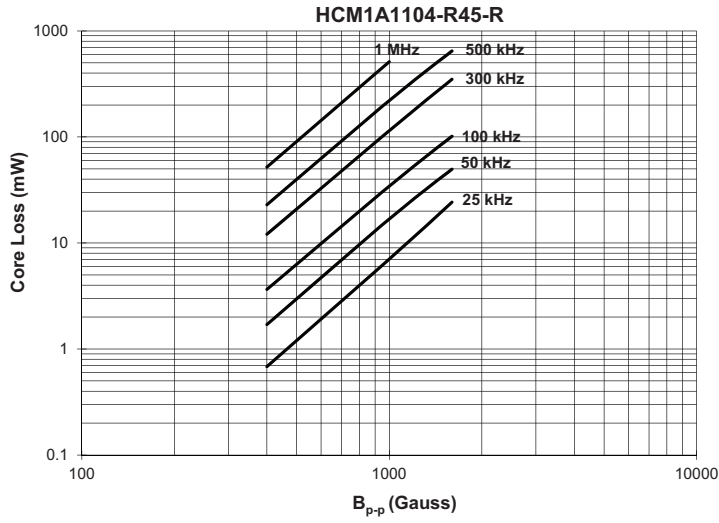







Core loss vs B_{p-p}

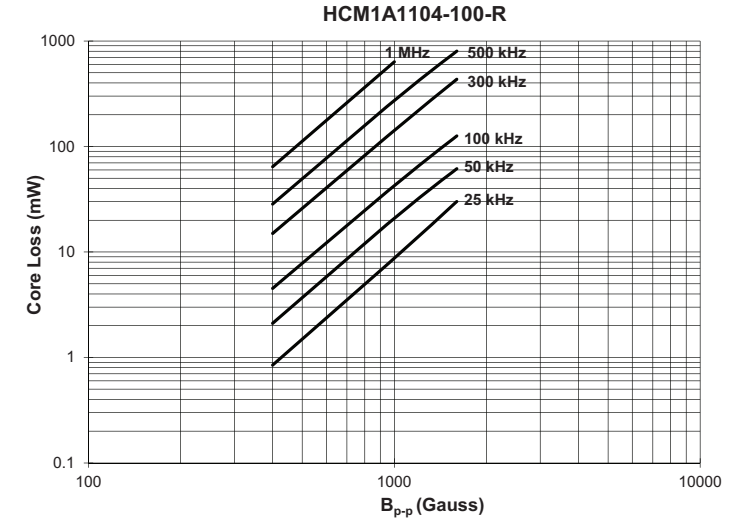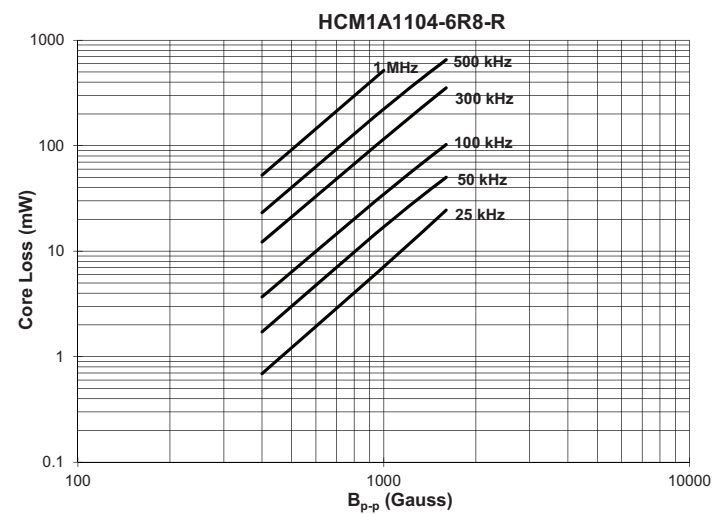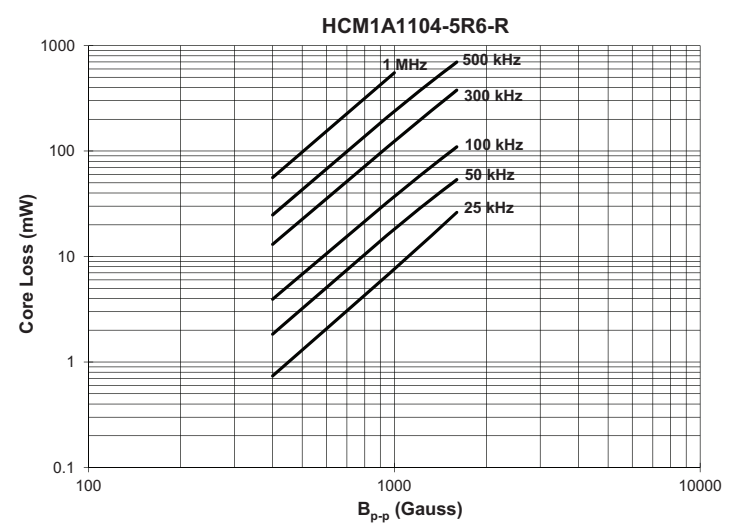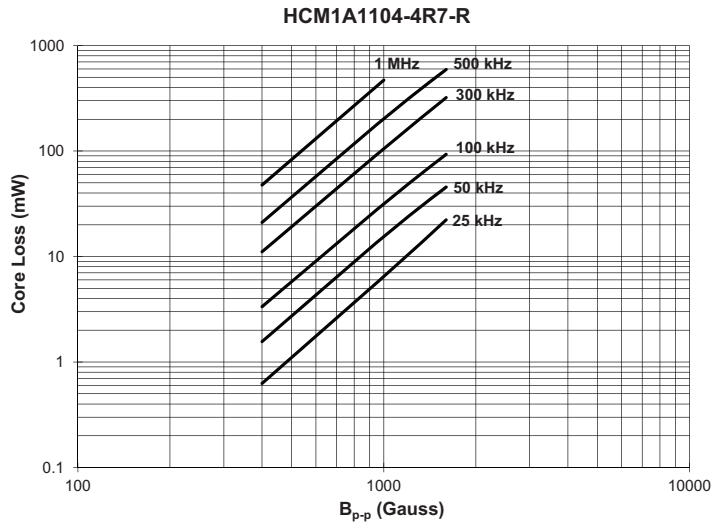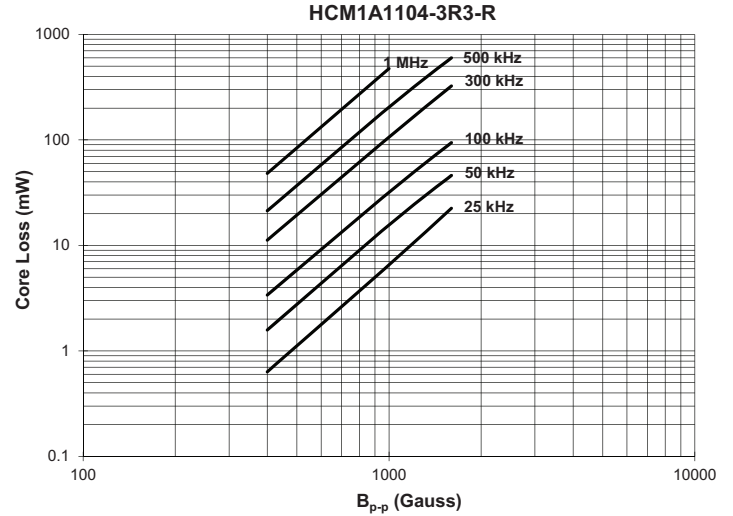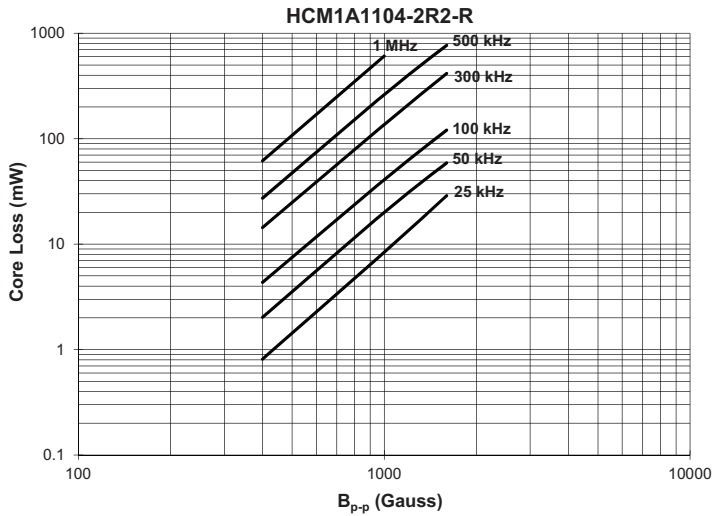







Core loss vs B_{p-p}

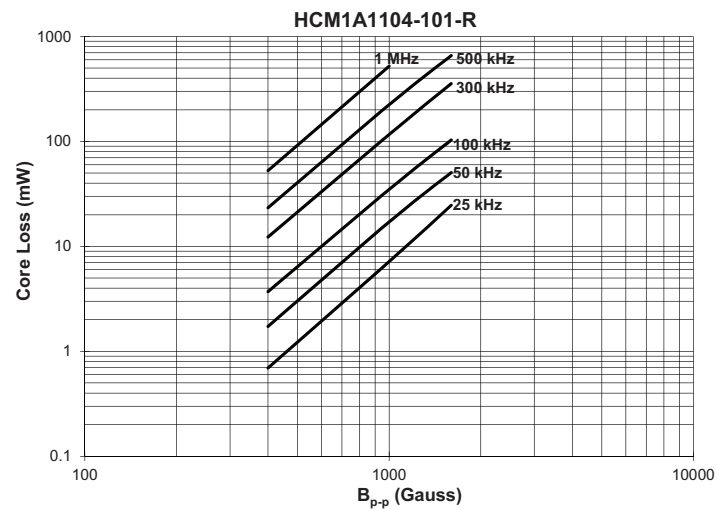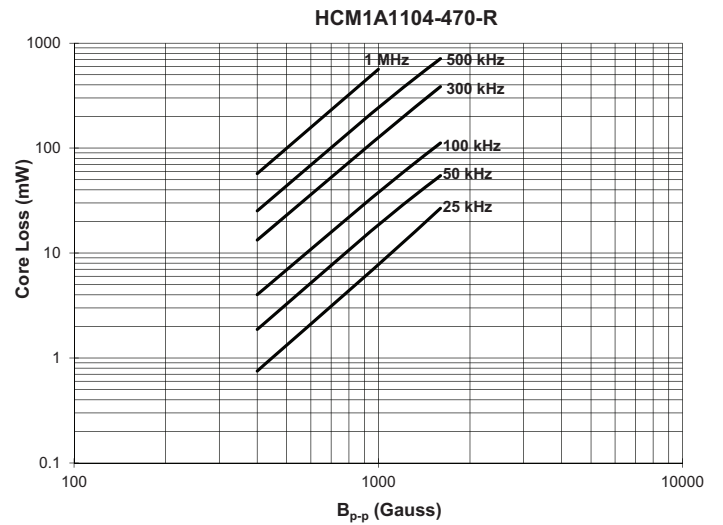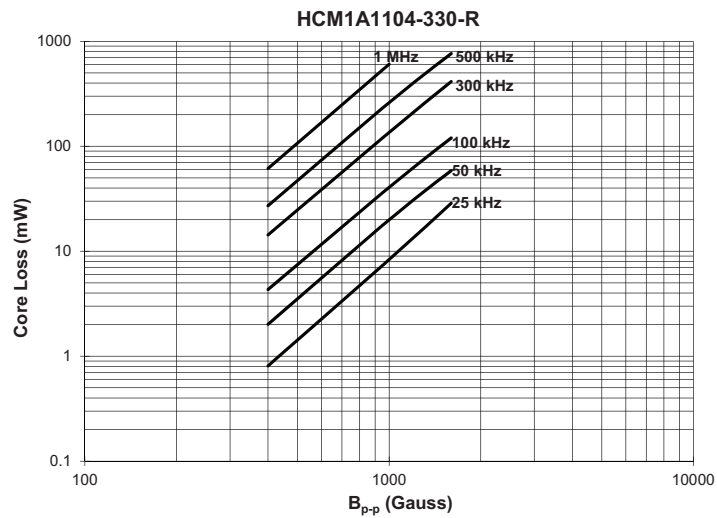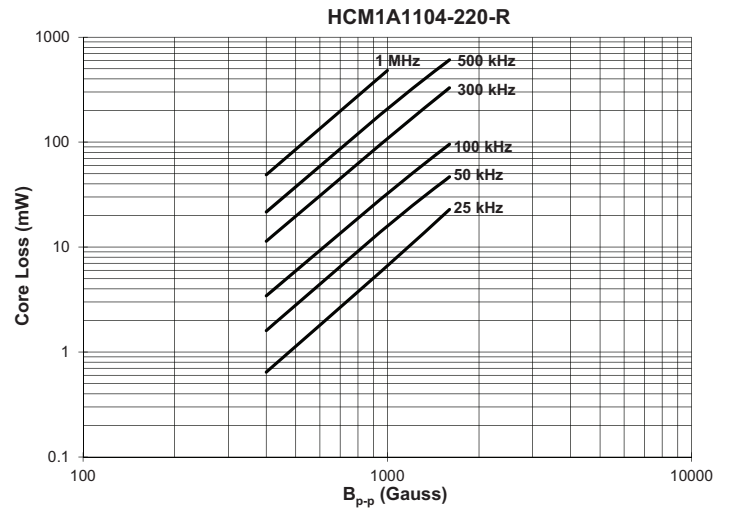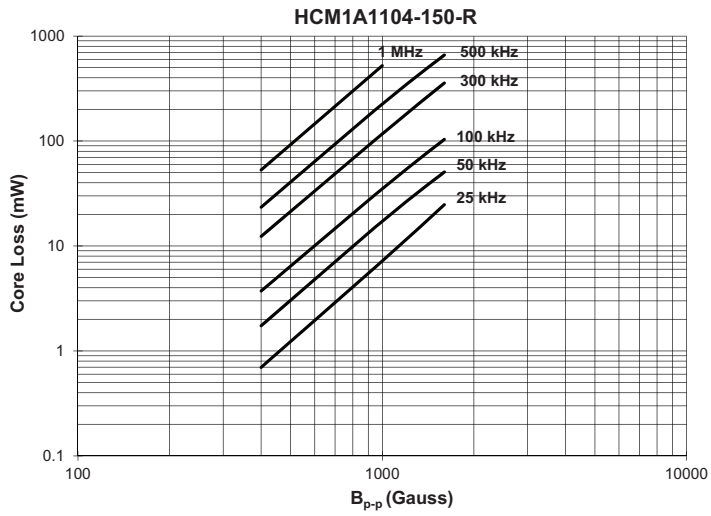







Inductance and temperature rise vs. current

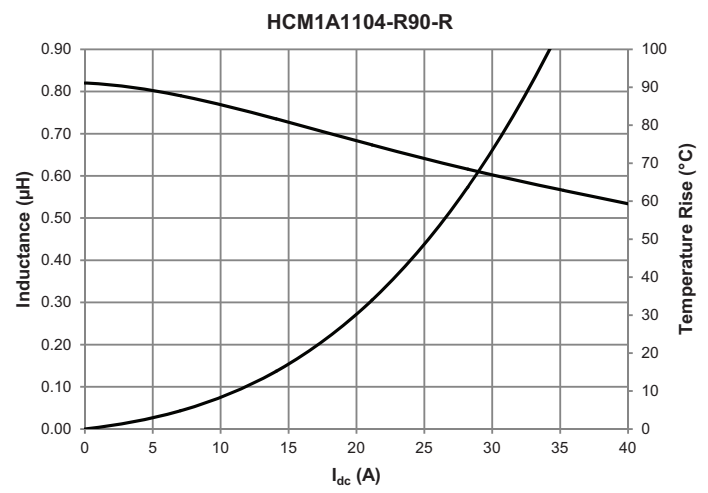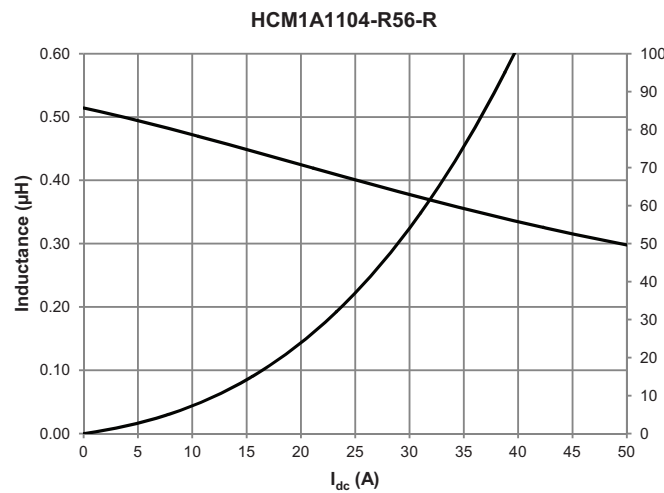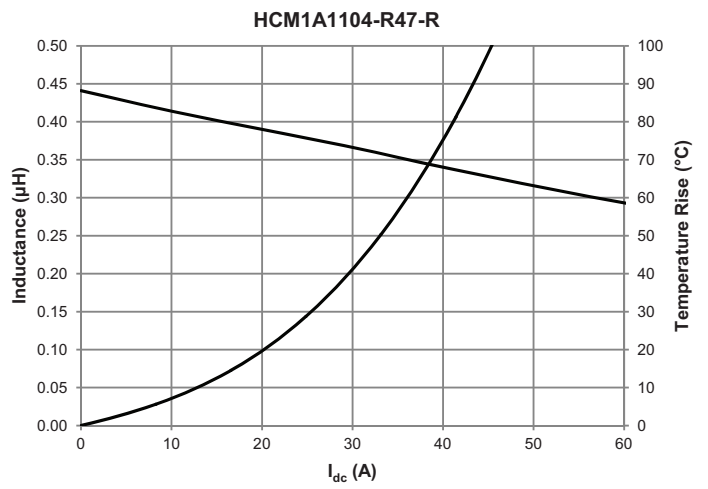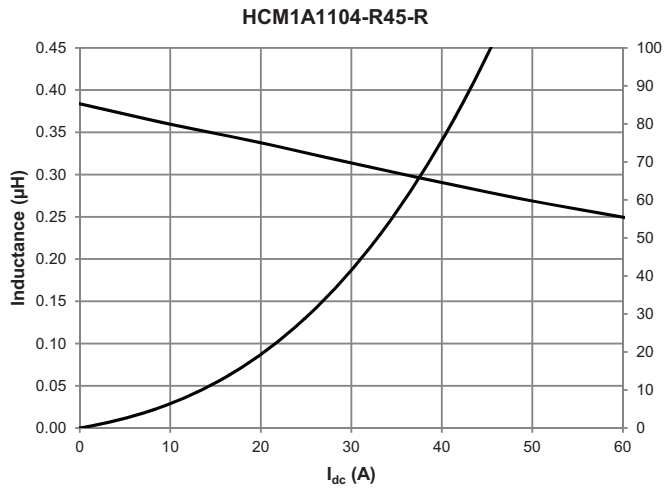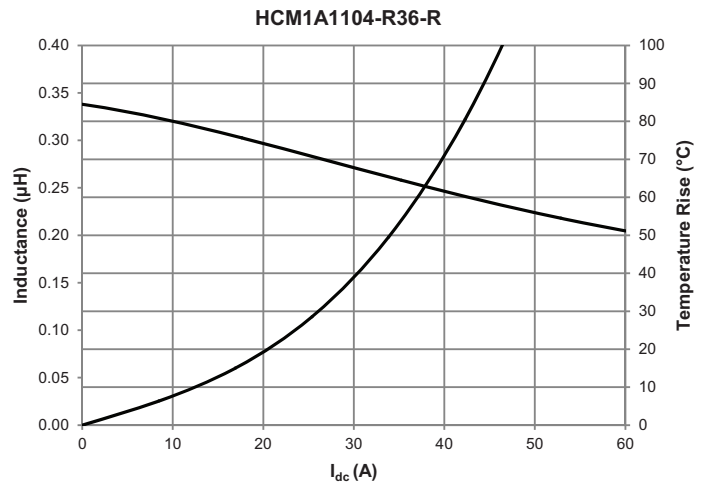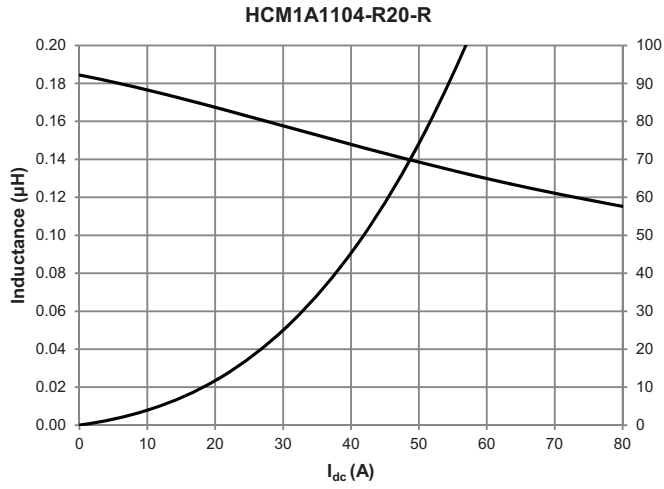


Inductance and temperature rise vs. current

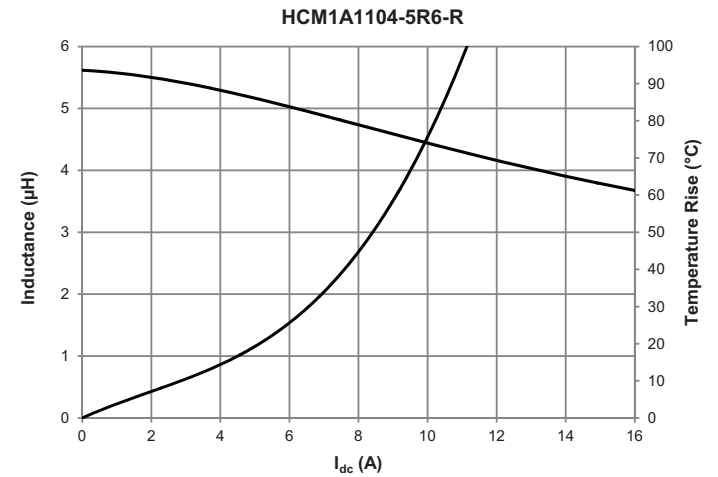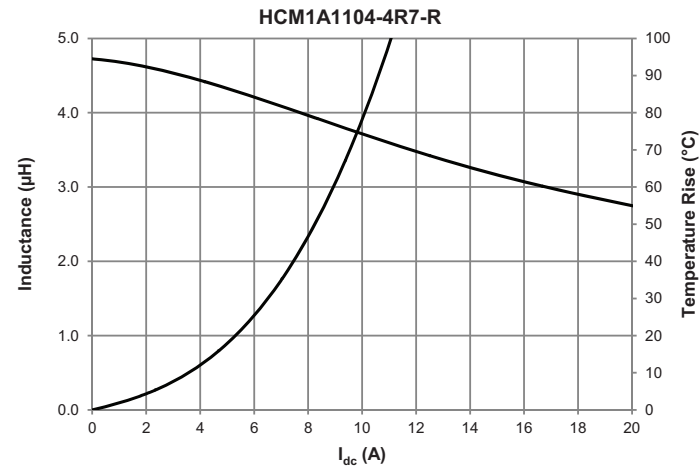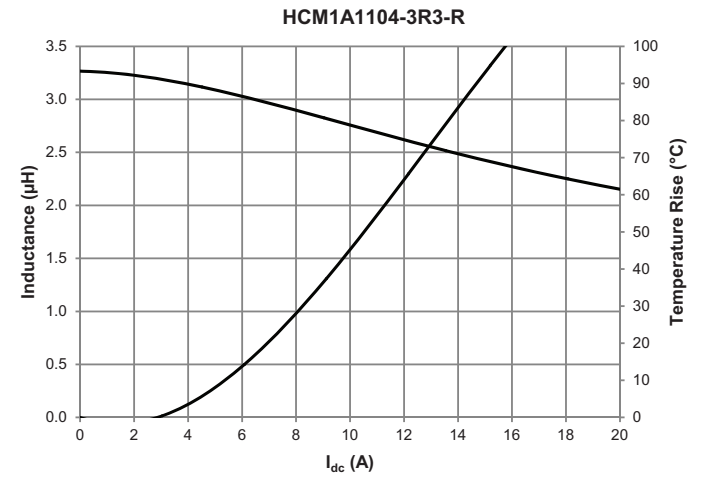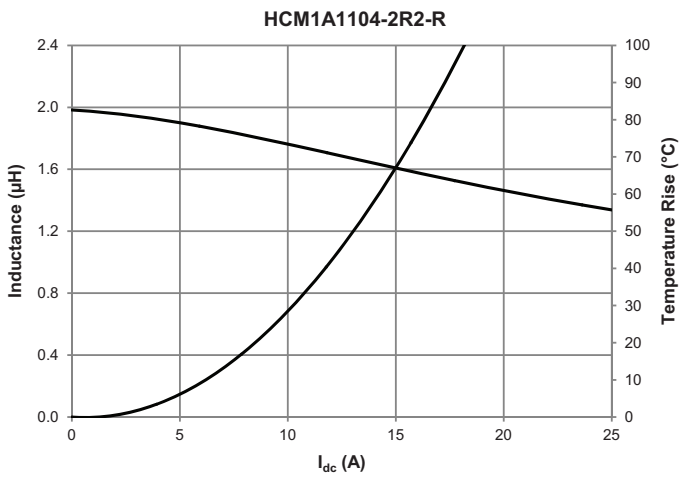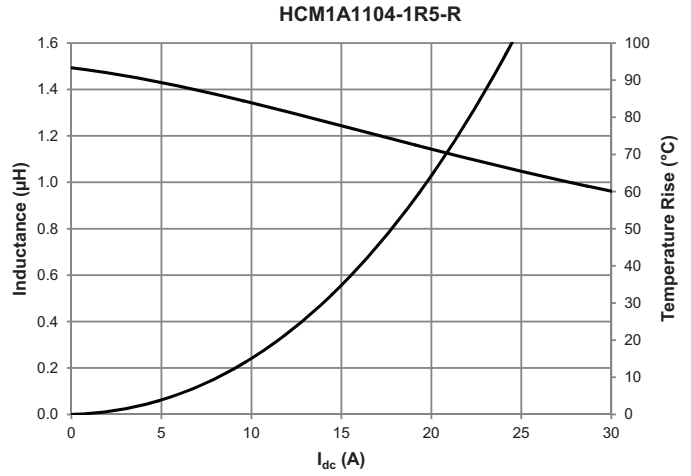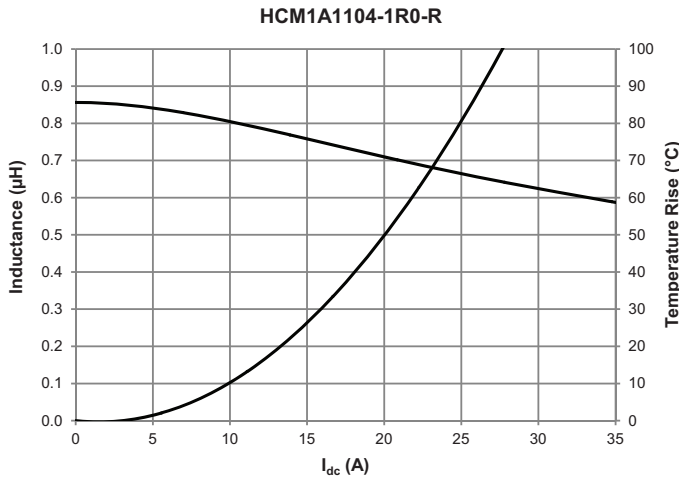

Inductance and temperature rise vs. current

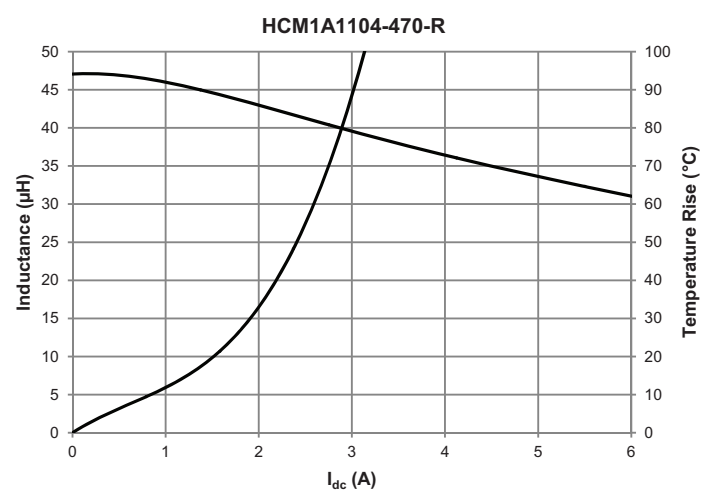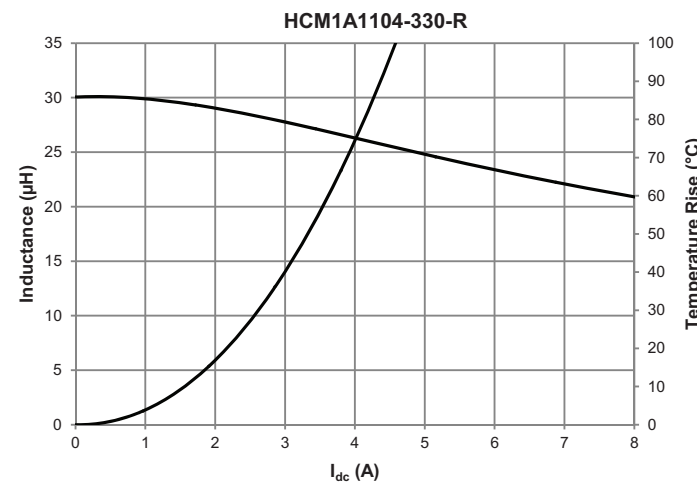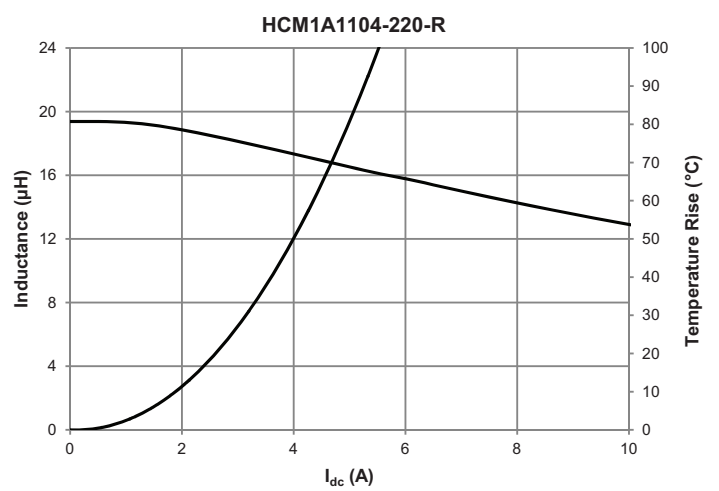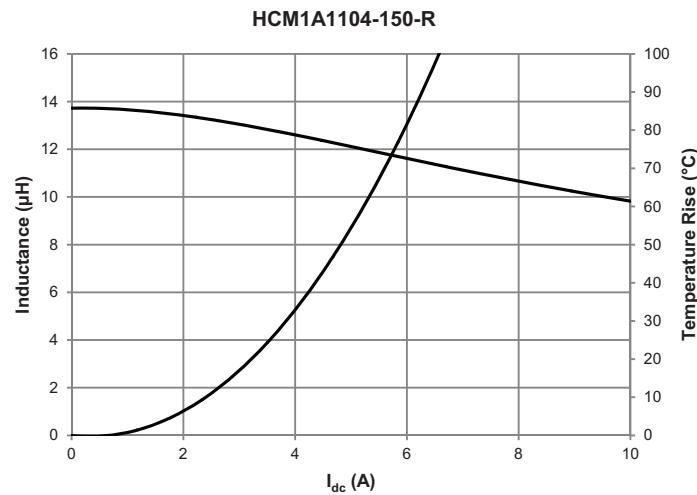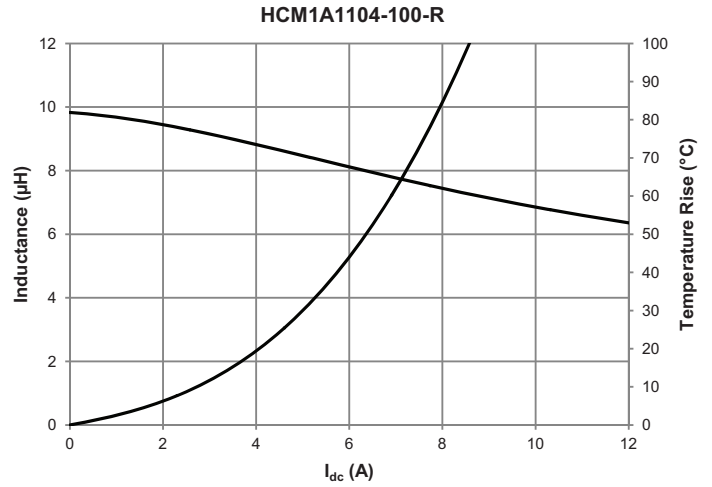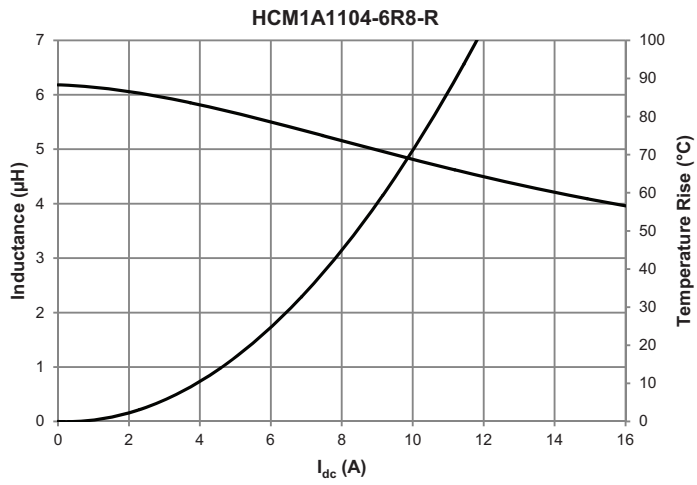

Inductance and temperature rise vs. current

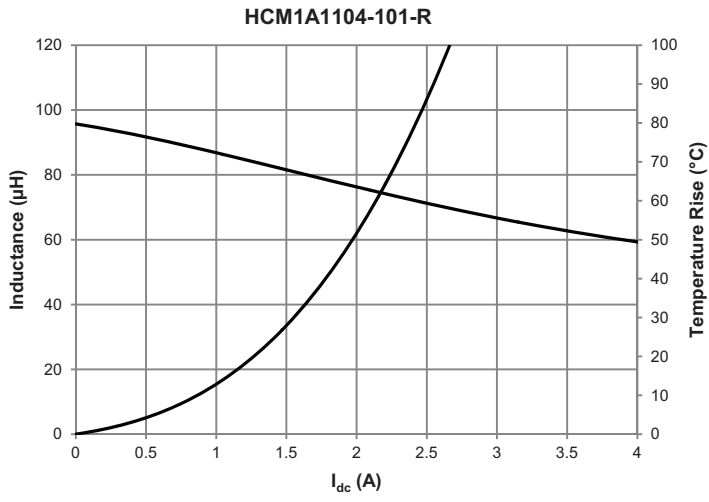

Solder reflow profile

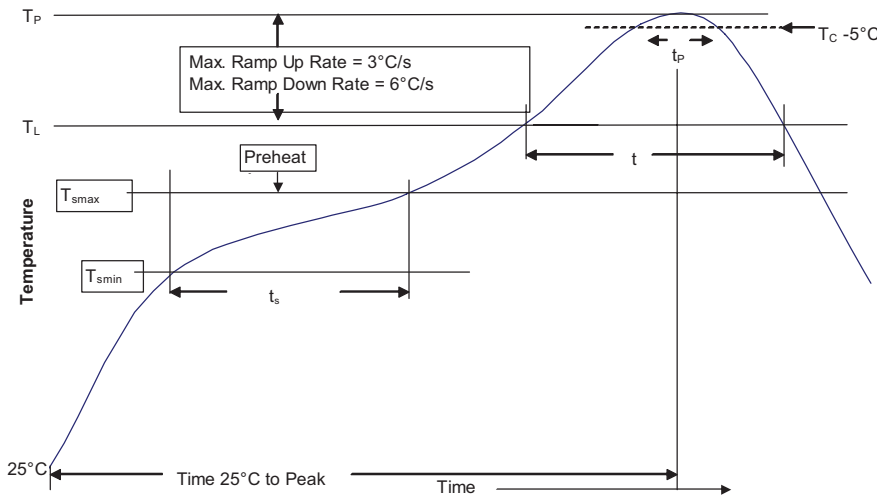


Table 1 - Standard SnPb Solder (T_C)

Package Thickness	Volume mm ³ <350	Volume mm ³ ≥350
<2.5mm)	235°C	220°C
≥2.5mm	220°C	220°C

Table 2 - Lead (Pb) Free Solder (T_C)

Package Thickness	Volume mm ³ <350	Volume mm ³ 350 - 2000	Volume mm ³ >2000
<1.6mm	260°C	260°C	260°C
1.6 – 2.5mm	260°C	250°C	245°C
>2.5mm	250°C	245°C	245°C

Reference JEDEC J-STD-020

Profile Feature	Standard SnPb Solder	Lead (Pb) Free Solder
Preheat and Soak		
• Temperature min. (T _{smin})	100°C	150°C
• Temperature max. (T _{smax})	150°C	200°C
• Time (T _{smin} to T _{smax}) (t _s)	60-120 Seconds	60-120 Seconds
Average ramp up rate T _{smax} to T _p	3°C/ Second Max.	3°C/ Second Max.
Liquidous temperature (T _L)	183°C	217°C
Time at liquidous (t _L)	60-150 Seconds	60-150 Seconds
Peak package body temperature (T _p)*	Table 1	Table 2
Time (t _p)** within 5 °C of the specified classification temperature (T _C)	20 Seconds**	30 Seconds**
Average ramp-down rate (T _p to T _{smax})	6°C/ Second Max.	6°C/ Second Max.
Time 25°C to Peak Temperature	6 Minutes Max.	8 Minutes Max.

* Tolerance for peak profile temperature (T_p) is defined as a supplier minimum and a user maximum.
** Tolerance for time at peak profile temperature (t_p) is defined as a supplier minimum and a user maximum.

Life Support Policy: Eaton does not authorize the use of any of its products for use in life support devices or systems without the express written approval of an officer of the Company. Life support systems are devices which support or sustain life, and whose failure to perform, when properly used in accordance with instructions for use provided in the labeling, can be reasonably expected to result in significant injury to the user.

Eaton reserves the right, without notice, to change design or construction of any products and to discontinue or limit distribution of any products. Eaton also reserves the right to change or update, without notice, any technical information contained in this bulletin.

Eaton
Electronics Division
 1000 Eaton Boulevard
 Cleveland, OH 44122
 United States
www.eaton.com/electronics



© 2016 Eaton
 All Rights Reserved
 Publication No. 10550 BU-MC16071
 August 2016

Eaton is a registered trademark.
 All other trademarks are property of their respective owners.

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Fixed Inductors](#) category:

Click to view products by [Eaton](#) manufacturer:

Other Similar products are found below :

[CR43NP-680KC](#) [CR54NP-820KC](#) [CR54NP-8R5MC](#) [CTX32CT-100](#) [70F224AI](#) [MGDQ4-00004-P](#) [MHL1ECTTP18NJ](#) [MHL1JCTTD12NJ](#)
[PE-51506NL](#) [PE-53601NL](#) [PE-53602NL](#) [PE-53630NL](#) [PE-53824SNLT](#) [PE-92100NL](#) [PG0434.801NLT](#) [PG0936.113NLT](#) [9310-16](#) [PM06-2N7](#) [PM06-39NJ](#) [A01TK](#) [1206CS-471XJ](#) [HC2-2R2TR](#) [HC2LP-R47-R](#) [HC3-2R2-R](#) [1206CS-151XG](#) [RCH664NP-140L](#) [RCH664NP-4R7M](#)
[RCH8011NP-221L](#) [RCP1317NP-332L](#) [RCP1317NP-391L](#) [RCR1010NP-470M](#) [RCR110DNP-331L](#) [DH2280-4R7M](#) [DS1608C-106](#) [ASPI-4020HI-R10M-T](#) [B10TJ](#) [B82477P4333M](#) [B82498B3101J000](#) [B82498B3680J000](#) [ELJ-RE27NJF2](#) [1812CS-153XJ](#) [1812CS-183XJ](#) [1812CS-223XJ](#) [1812LS-104XJ](#) [1812LS-105XJ](#) [1812LS-124XJ](#) [1812LS-154XJ](#) [1812LS-223XJ](#) [1812LS-224XJ](#) [1812LS-563XJ](#)