


In-Line Waterproof Fuseholder

For $\frac{1}{4}$ " x $1\frac{1}{4}$ " Fuses

HFA Series



Dimensional Data

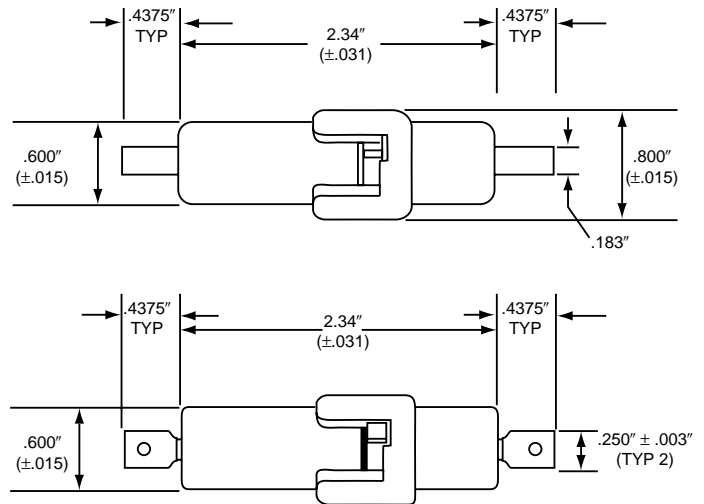

Catalog Symbol: HFA and HFA-HH
 In-Line Waterproof Fuseholder
 Ampere Rating: 20 Amperes max.
 Voltage Rating: 250 Volts AC max.
 Material: Phenolic
 U.L. Flammability Rating: 94 VO
 Temperature Rating (RTI): 150°C
 Agency Approvals:
 U.L. Recognized, Guide IZLT2, File E14853

Electrical Ratings

Catalog Symbol	Amps	Volts AC	Terminals
HFA	20	250	Crimp
HFA-HH	20	250	$\frac{1}{4}$ " Quick Connect

General Information:

- Waterproof for exposed locations.
- Accepts #16 to #12 copper wire.
- Body Material: Phenolic.
- Lead Material: Copper crimp.
- For $\frac{1}{4}$ " x $1\frac{1}{4}$ " fuses.
- Recommended crimp tools:
 - Thomas & Betts - WT-111-M
 - Thomas & Betts - WT-1300
 - Radio Shack - 64-409

CE CE logo denotes compliance with European Union Low Voltage Directive (50-1000 Vac, 75-1500 Vdc). Refer to BIF document #8002 or contact Bussmann Application Engineering at 314-527-1270 for more information.

The only controlled copy of this BIF document is the electronic read-only version located on the Bussmann Network Drive. All other copies of this document are by definition uncontrolled. This bulletin is intended to clearly present comprehensive product data and provide technical information that will help the end user with design applications. Bussmann reserves the right, without notice, to change design or construction of any products and to discontinue or limit distribution of any products. Bussmann also reserves the right to change or update, without notice, any technical information contained in this bulletin. Once a product has been selected, it should be tested by the user in all possible applications.

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Fuse Holder](#) category:

Click to view products by [Eaton](#) manufacturer:

Other Similar products are found below :

[570-290-741P40](#) [570-290-751P40](#) [020417G](#) [020418E](#) [6R30A1B](#) [F600A3B](#) [80910030](#) [8601.2020](#) [G15A2SPQ](#) [9-3557-GP REV A](#) [HDJ-B](#)
[R6J30A3S](#) [HFH-1](#) [RF30A1S](#) [RF30A2B](#) [RF30A3SP](#) [15600-08-10](#) [BK/FHN19G](#) [BK/HHM](#) [BK/HKP-CCHH](#) [BK/HKP-JJ](#) [BK/HTJ-LES-](#)
[FUSE](#) [HMG-241](#) [HTJ-LES-FUSE](#) [C4044-1](#) [2086-1](#) [2193](#) [2602](#) [2650](#) [178.000100](#) [FHN31G1](#) [T30A2B](#) [G4PB8](#) [2660](#) [2799](#) [CQ-209V](#) [HKP-](#)
[CCHH](#) [R6F30A2S](#) [341001A](#) [345621A](#) [CVRMCC](#) [4202](#) [4407](#) [4408](#) [4413](#) [4423](#) [4532](#) [4537](#) [TSD1404-12](#) [BK/FHN31G1](#)