
Panel Mounted for 5mm × 20mm Fuses

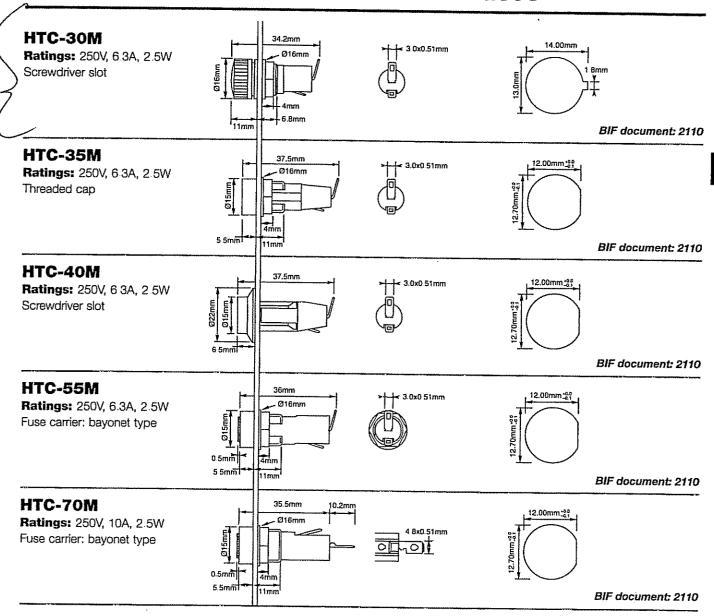

Specifications

Terminals: Brass, tin-plated.

Molded Materials: High temperature thermoplastic that meets the flammability ratings of UL 94VO; Glow Wire Test: 960°C

per IEC 695-2-1

Solderability: In accordance with IEC 68-2-20

Agency Information: UL Recognized — Guide IZLT2, File E14853;

CSA Certified — Class 6225-01, File 47235;

SEMKO — 9226031 (HTC-30M, HTC-35M); 9226032 (HTC-40M); 9226033 (HTC-55M); 9226034

(HTC-70M)

Electrical: Contact Resistance: ≤ 10mΩ; Insulation Resistance: ≥ 10mΩ; Dielectric Strength ≥ 2000 VAC

Shock Safety: PC2 (fuseholders).

Packaging: Standard Qty 10 (No Prefix), Bulk Qty 100 (Prefix Catalog Number with BK/).

C€ CE logo denotes compliance with European Union Low Voltage Directive (50-1000V AC, 75-1500V DC) Refer to BIF document #8002 or contact Bussmann Application Engineering at 636-527-1270 for more information





X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for Eaton manufacturer:

Other Similar products are found below:

BK1-S506-6-3-R BK-MDL-3-R BK/ABC-1 BK/MDA-15 GMA-5A GMA250MA 89096-015 8946K153 8961K155 M22-D-R-GB0/K11 M22-L-R/R 6422 6580 CTX20-16-52LP-R CWL530FI CXM/CO/GP/R/BB 6HD36 714125 MBO-2 7314K36 7321K2 F02A-1-1/2A F02A-1-1/2AS F02A-1AS F02A-2AS F02A-3/4A F03A250V12A F03B125V4A MCR-4 MDA-2-8/10-R MDA-30A MDA-V-1/16 F60C500V10AS F60C500V15AS 7563K84 7634K36 MDQ-3/16 MDQ-7/10 MDQ-V-1/10 MDQ-V-1/14 MDQ-V-1/16 MDQ-V-1/2 MDQ-V-1/4 MDQ-V-3/16 MDQ-V-3/8 MDQ-V-6/10 MDQ-V-6-1/4 MDV-1-1/2 MDV-3/8 MDV-4