

# MCLA3216V1

## Automotive grade multilayer inductor



### Product features

- AEC-Q200 qualified
- 1206 (3216 metric) package
- Multilayer monolithic construction yields high reliability
- Inductance range from 0.047 uH to 12 uH
- Moisture sensitivity level (MSL): 1

### Applications

- ADAS
- Infotainment
- Wireless communications
- Wifi, bluetooth, satellite
- Antenna tuning
- On board computer

### Environmental data

- Operating temperature range: -40 °C to +125 °C (ambient plus self-temperature rise)



**Product specifications**

| Part number       | OCL Tolerance (%) | OCL (μH) | Q minimum | DCR@ (Ω) @ +25 °C maximum | Test frequency (MHz) | Test voltage (mV) | SRF (MHz) minimum | I Rated (mA) |
|-------------------|-------------------|----------|-----------|---------------------------|----------------------|-------------------|-------------------|--------------|
| MCLA3216V1-R047-R | ±10               | 0.047    | 30        | 0.15                      | 50                   | 50                | 320               | 300          |
| MCLA3216V1-R056-R | ±10               | 0.056    | 30        | 0.2                       | 50                   | 50                | 320               | 300          |
| MCLA3216V1-R068-R | ±10               | 0.068    | 30        | 0.25                      | 50                   | 50                | 280               | 300          |
| MCLA3216V1-R082-R | ±10               | 0.082    | 30        | 0.25                      | 50                   | 50                | 280               | 300          |
| MCLA3216V1-R100-R | ±10               | 0.1      | 25        | 0.25                      | 25                   | 50                | 235               | 250          |
| MCLA3216V1-R120-R | ±10               | 0.12     | 25        | 0.25                      | 25                   | 50                | 220               | 250          |
| MCLA3216V1-R150-R | ±10               | 0.15     | 25        | 0.25                      | 25                   | 50                | 200               | 250          |
| MCLA3216V1-R180-R | ±10               | 0.18     | 25        | 0.3                       | 25                   | 50                | 185               | 250          |
| MCLA3216V1-R220-R | ±10               | 0.22     | 25        | 0.3                       | 25                   | 50                | 170               | 250          |
| MCLA3216V1-R270-R | ±10               | 0.27     | 25        | 0.3                       | 25                   | 50                | 150               | 250          |
| MCLA3216V1-R330-R | ±10               | 0.33     | 25        | 0.3                       | 25                   | 50                | 145               | 250          |
| MCLA3216V1-R390-R | ±10               | 0.39     | 30        | 0.5                       | 25                   | 50                | 135               | 200          |
| MCLA3216V1-R470-R | ±10               | 0.47     | 30        | 0.5                       | 25                   | 50                | 125               | 200          |
| MCLA3216V1-R560-R | ±10               | 0.56     | 30        | 0.5                       | 25                   | 50                | 115               | 150          |
| MCLA3216V1-R680-R | ±10               | 0.68     | 30        | 0.5                       | 25                   | 50                | 105               | 150          |
| MCLA3216V1-R820-R | ±10               | 0.82     | 30        | 0.6                       | 25                   | 50                | 100               | 150          |
| MCLA3216V1-1R0-R  | ±10               | 1.0      | 35        | 0.3                       | 10                   | 50                | 75                | 100          |
| MCLA3216V1-1R2-R  | ±10               | 1.2      | 35        | 0.4                       | 10                   | 50                | 65                | 100          |
| MCLA3216V1-1R5-R  | ±10               | 1.5      | 35        | 0.4                       | 10                   | 50                | 60                | 50           |
| MCLA3216V1-1R8-R  | ±10               | 1.8      | 35        | 0.4                       | 10                   | 50                | 55                | 50           |
| MCLA3216V1-2R2-R  | ±10               | 2.2      | 35        | 0.5                       | 10                   | 50                | 50                | 50           |
| MCLA3216V1-2R7-R  | ±10               | 2.7      | 35        | 0.5                       | 10                   | 50                | 45                | 50           |
| MCLA3216V1-3R3-R  | ±10               | 3.3      | 35        | 0.5                       | 10                   | 50                | 41                | 50           |
| MCLA3216V1-3R9-R  | ±10               | 3.9      | 35        | 0.6                       | 10                   | 50                | 38                | 50           |
| MCLA3216V1-4R7-R  | ±10               | 4.7      | 35        | 0.65                      | 10                   | 50                | 35                | 25           |
| MCLA3216V1-5R6-R  | ±10               | 5.6      | 35        | 0.8                       | 4                    | 50                | 32                | 25           |
| MCLA3216V1-6R8-R  | ±10               | 6.8      | 35        | 0.8                       | 4                    | 50                | 29                | 25           |
| MCLA3216V1-8R2-R  | ±10               | 8.2      | 35        | 0.8                       | 4                    | 50                | 26                | 25           |
| MCLA3216V1-100-R  | ±10               | 10       | 35        | 0.8                       | 2                    | 50                | 24                | 25           |
| MCLA3216V1-120-R  | ±10               | 12       | 35        | 0.9                       | 2                    | 50                | 22                | 15           |

1. Test frequency and voltage is for open circuit inductance (OCL) and Q at +25 °C

2. Rated I: When rated I is applied to the product, self-temperature rise will be 40 °C or less.

3. Part Number Definition: MCLA3216V1-xxx-R


MCLA3216V1 = Product code and size

xxx= inductance value in μH, R= decimal point,

If no R is present then last character equals number of zeros

-R suffix = RoHS compliant

**Mechanical parameters, schematic, pad layout (mm)**


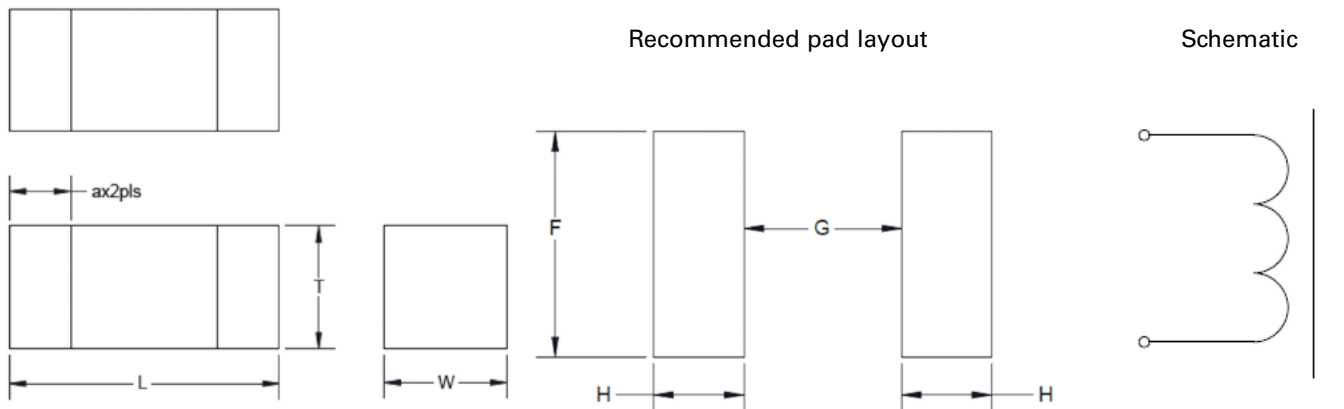


| Part Number      | L         | W         | T         | a         | F        | G        | H        |
|------------------|-----------|-----------|-----------|-----------|----------|----------|----------|
| MCLA3216V1-xxx-R | 3.20±0.20 | 1.60±0.20 | 0.90±0.20 | 0.50±0.30 | 2.00 ref | 1.40 ref | 1.20 ref |

Part marking: No marking  
 All soldering surfaces to be coplanar within 0.1 millimeters  
 Tolerances are ±0.1 millimeters unless stated otherwise  
 Pad layout dimensions are reference only  
 Traces or vias underneath the inductor is not recommended




**Packaging information (mm)**

Drawing not to scale  
 Supplied in tape and reel packaging, 4000 parts per 7" diameter reel


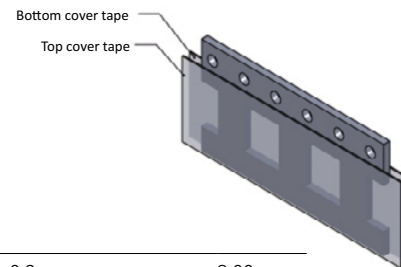
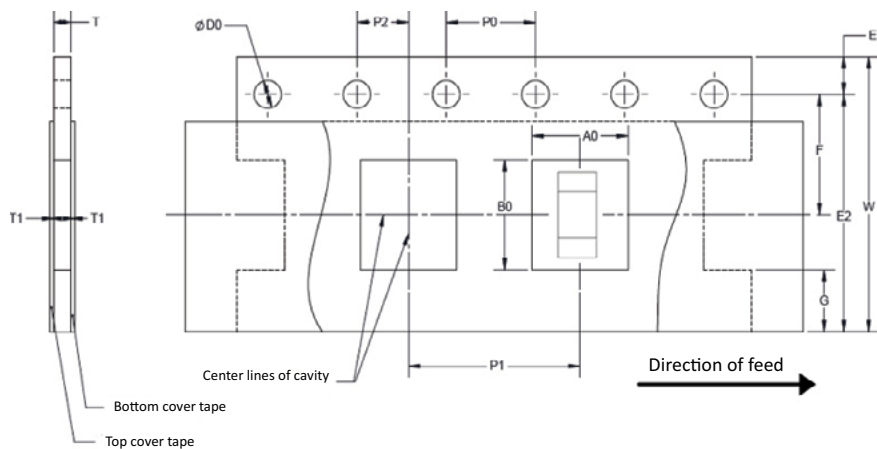


|        |          |
|--------|----------|
| W±0.2  | 8.00     |
| F±0.1  | 3.50     |
| E1±0.2 | 1.75     |
| E2 Min | na       |
| P0±0.2 | 4.00     |
| P1±0.2 | 4.00     |
| P2±0.1 | 2.00     |
| D0±0.1 | 1.55     |
| A0     | 1.9±0.2  |
| B0     | 3.5±0.2  |
| T      | 0.95±0.1 |
| T1 Max | na       |


Inductance vs frequency

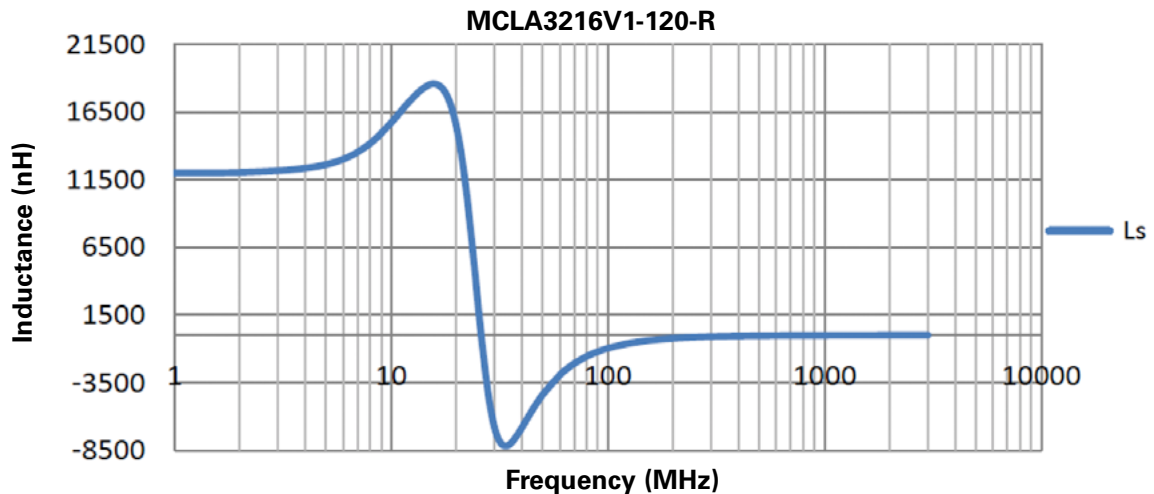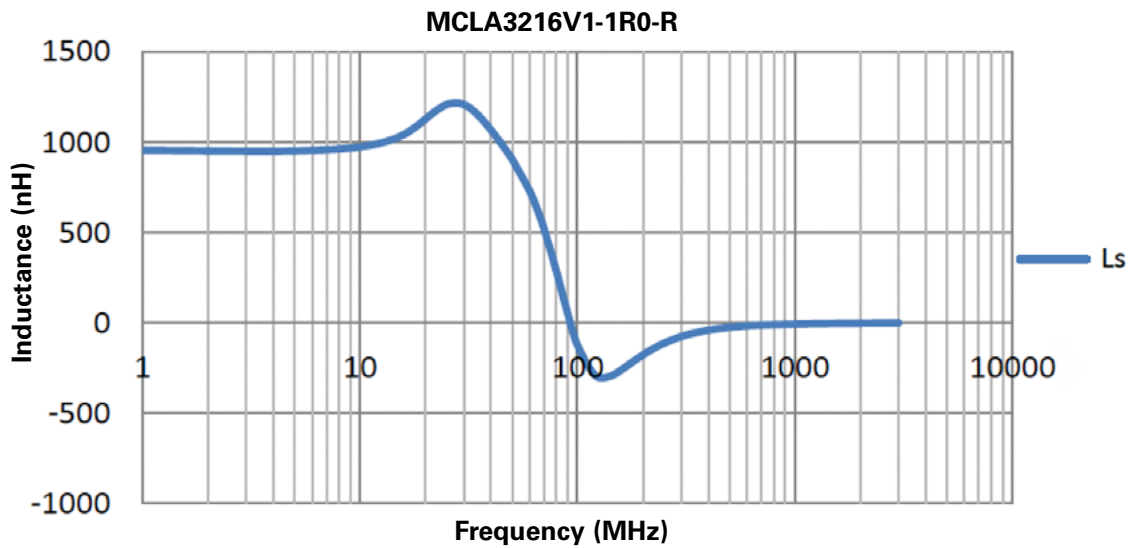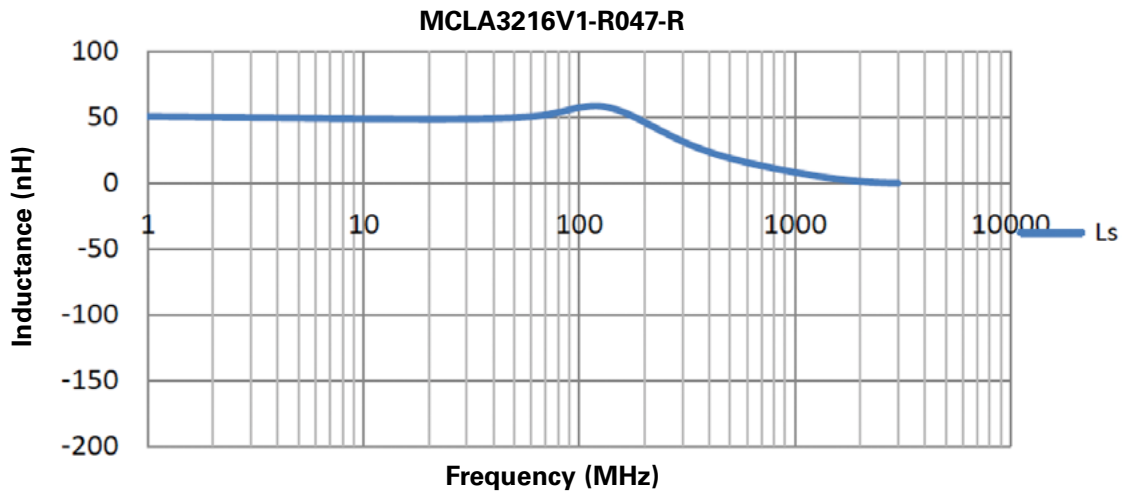

Q vs frequency

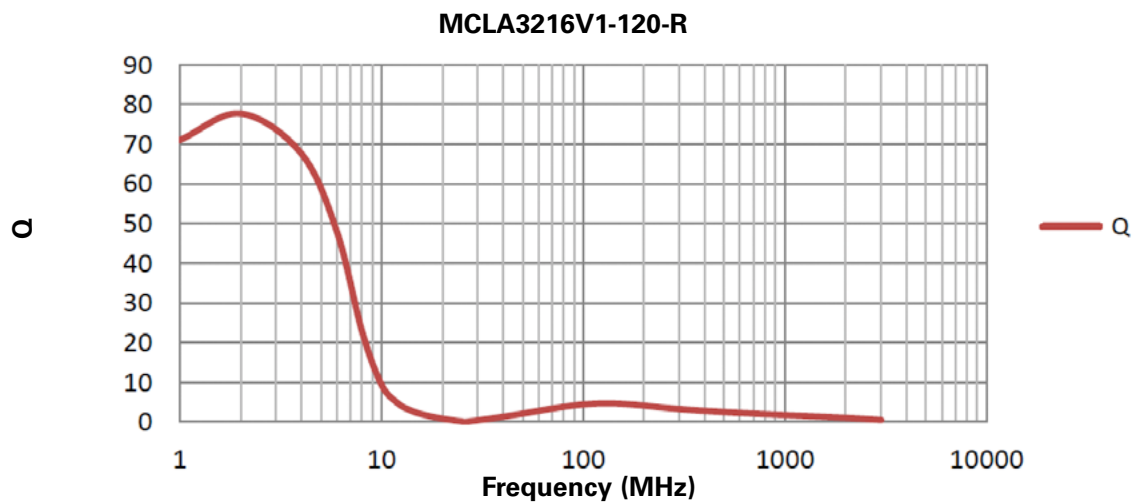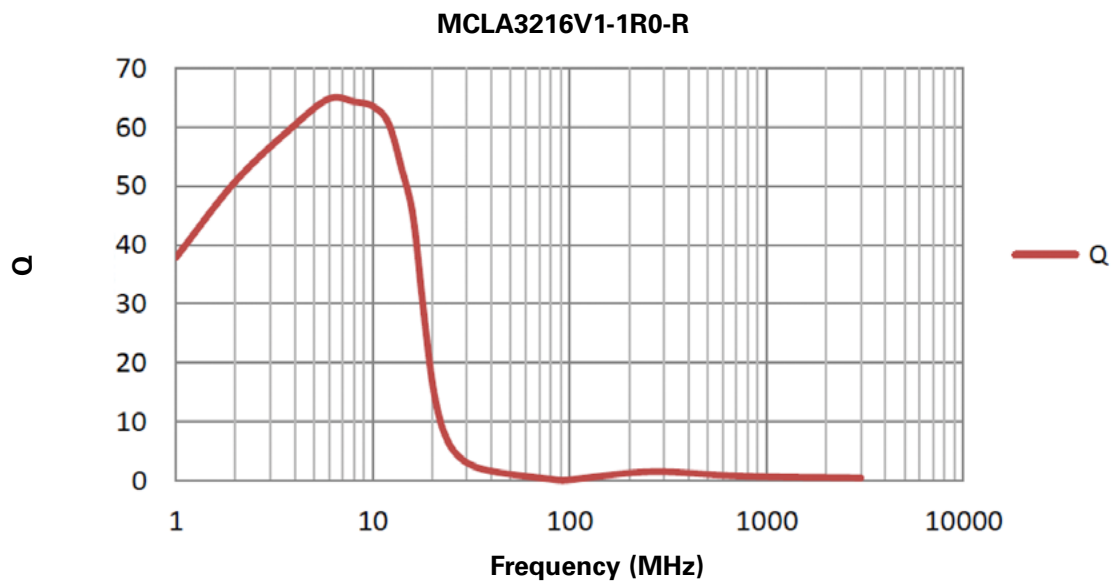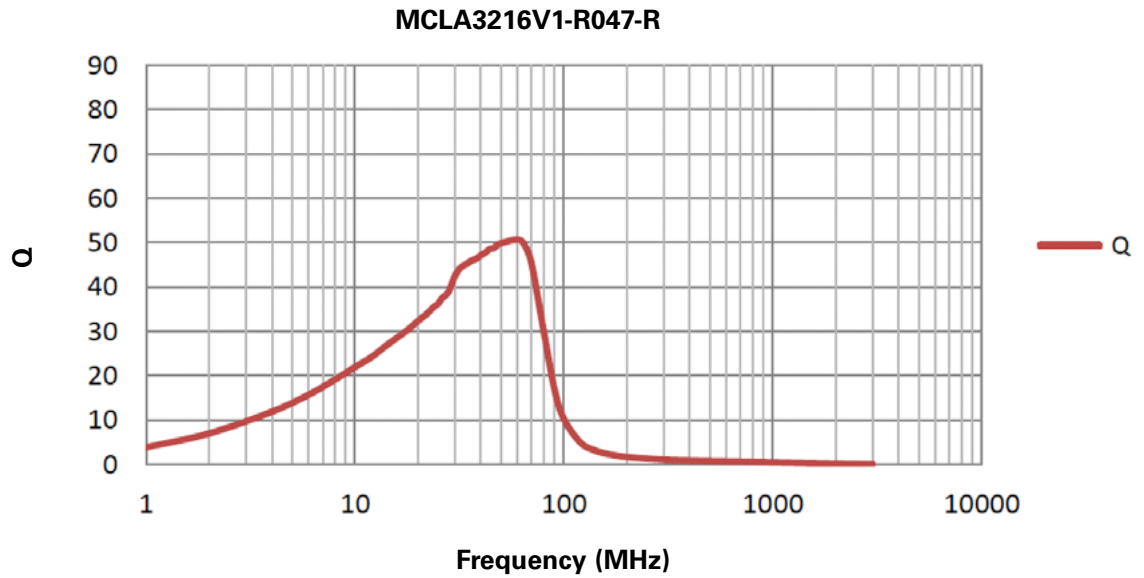

**Solder reflow profile**

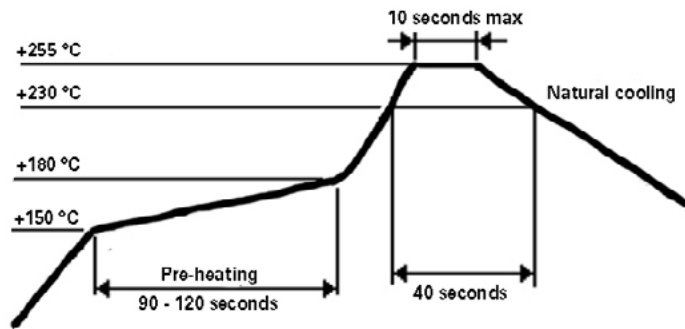

Life Support Policy: Eaton does not authorize the use of any of its products for use in life support devices or systems without the express written approval of an officer of the Company. Life support systems are devices which support or sustain life, and whose failure to perform, when properly used in accordance with instructions for use provided in the labeling, can be reasonably expected to result in significant injury to the user.

Eaton reserves the right, without notice, to change design or construction of any products and to discontinue or limit distribution of any products. Eaton also reserves the right to change or update, without notice, any technical information contained in this bulletin.

**Eaton**  
**Electronics Division**  
1000 Eaton Boulevard  
Cleveland, OH 44122  
United States  
Eaton.com/electronics

© 2019 Eaton  
All Rights Reserved  
Printed in USA  
Publication No. 10978 BU-MC19106  
November 2019

Eaton is a registered trademark.  
All other trademarks are property  
of their respective owners.

Follow us on social media to get the  
latest product and support information.



## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Fixed Inductors](#) category:*

*Click to view products by [Eaton](#) manufacturer:*

Other Similar products are found below :

[CR43NP-680KC](#) [CR54NP-820KC](#) [CR54NP-8R5MC](#) [CTX32CT-100](#) [70F224AI](#) [MGDQ4-00004-P](#) [MHL1ECTTP18NJ](#) [MHL1JCTTD12NJ](#)  
[PE-51506NL](#) [PE-53601NL](#) [PE-53602NL](#) [PE-53630NL](#) [PE-53824SNLT](#) [PE-92100NL](#) [PG0434.801NLT](#) [PG0936.113NLT](#) [9310-16](#) [PM06-2N7](#) [PM06-39NJ](#) [A01TK](#) [1206CS-471XJ](#) [HC2-2R2TR](#) [HC2LP-R47-R](#) [HC3-2R2-R](#) [1206CS-151XG](#) [RCH664NP-140L](#) [RCH664NP-4R7M](#)  
[RCH8011NP-221L](#) [RCP1317NP-332L](#) [RCP1317NP-391L](#) [RCR1010NP-470M](#) [RCR110DNP-331L](#) [DH2280-4R7M](#) [DS1608C-106](#) [ASPI-4020HI-R10M-T](#) [B10TJ](#) [B82477P4333M](#) [B82498B3101J000](#) [B82498B3680J000](#) [ELJ-RE27NJF2](#) [1812CS-153XJ](#) [1812CS-183XJ](#) [1812CS-223XJ](#) [1812LS-104XJ](#) [1812LS-105XJ](#) [1812LS-124XJ](#) [1812LS-154XJ](#) [1812LS-223XJ](#) [1812LS-224XJ](#) [1812LS-563XJ](#)