

MFLA

SMD current sensing resistor- metal film



Applications

- Switched-mode power supply (SMPS)
- Voltage regulator module
- Power management
- Stepper motor drives


Environmental compliance




Product features

- Low sensing resistance
- 0805 (2012 metric) to 2512 (6432 metric)
- High power dissipation
- AEC-Q200 compliant
- Moisture sensitivity level (MSL): 1


Table 1. Part numbering configuration scheme

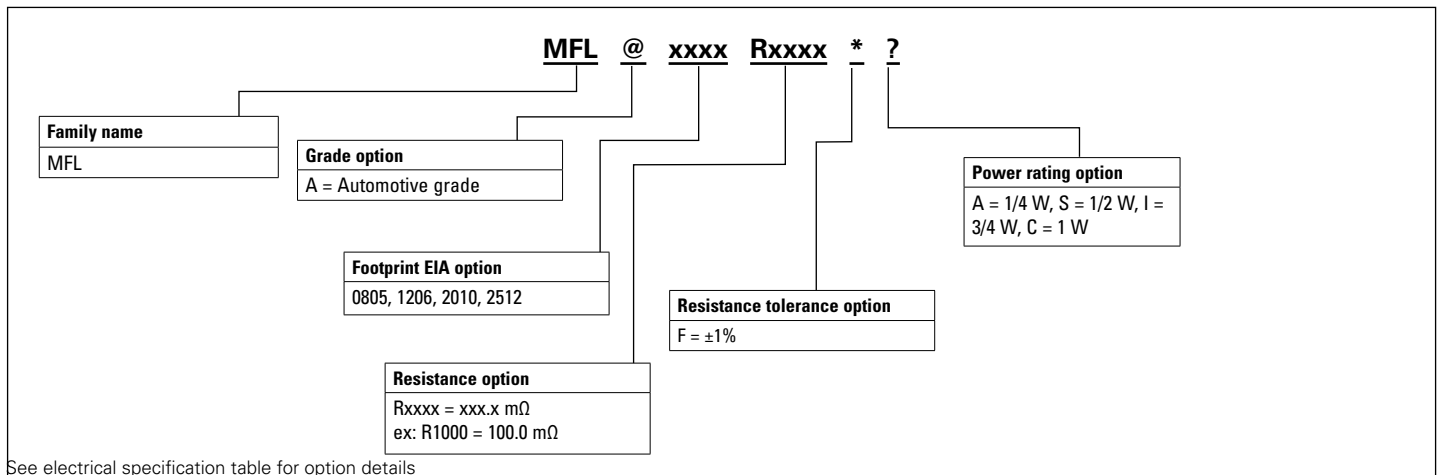

Mechanical parameters- Inches [mm]

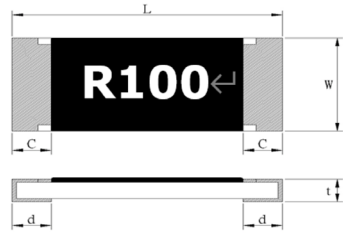


Construction

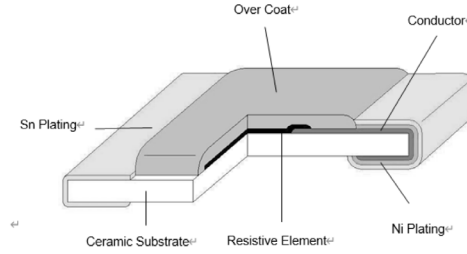

Family	Size code	L	W	C	d	t
MFLA0805	0805 [2012]	0.079 ± 0.004 [2.00 ± 0.10]	0.049 ± 0.004 [1.25 ± 0.10]	0.016 ± 0.008 [0.40 ± 0.20]	0.014 ± 0.008 [0.35 ± 0.20]	0.020 ± 0.004 [0.50 ± 0.10]
MFLA1206	1206 [3216]	0.122 ± 0.008 [3.10 ± 0.20]	0.061 ± 0.004 [1.55 ± 0.10]	0.020 ± 0.012 [0.50 ± 0.30]	0.016 ± 0.008 [0.40 ± 0.20]	0.022 ± 0.004 [0.55 ± 0.10]
MFLA2010	2010 [5025]	0.197 ± 0.008 [5.00 ± 0.20]	0.098 ± 0.008 [2.50 ± 0.20]	0.024 ± 0.012 [0.60 ± 0.30]	0.020 ± 0.010 [0.50 ± 0.25]	0.022 ± 0.004 [0.55 ± 0.10]
MFLA2512	2512 [6432]	0.248 ± 0.008 [6.30 ± 0.20]	0.126 ± 0.008 [3.20 ± 0.20]	0.024 ± 0.012 [0.60 ± 0.30]	0.020 ± 0.010 [0.50 ± 0.25]	0.022 ± 0.004 [0.55 ± 0.10]

Recommended PCB layout

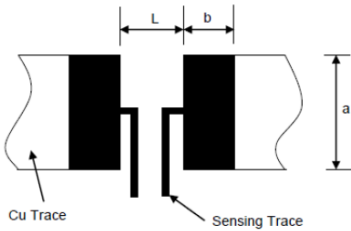

Series	a	b	L
MFLA0805	1.55	1.15	1.2
MFLA1206	1.85	1.20	2.2
MFLA2010	2.80	1.55	3.5
MFLA2512	3.50	1.75	4.0

1. The copper foil minimum thickness of PCB needs 3 oz.
2. PCB layout dimension tolerance is +/-0.1 mm.
3. The resistance will change slightly after soldered; it is dependent on PCB pad size design and it's necessary to consider the effect of the resistance increase or decrease.

Part marking

Family	Marking
MFLA0805	
MFLA1206	Rxxx: (xxx= resistance value in ohms expressed in 3 digits)
MFLA2010	R100 = 0.100 Ω or 100 mΩ
MFLA2512	

Electrical specifications

Part number	Size	Grade option	Resistance value mΩ (Part number code)	Resistance tolerance (Part number code)	Power rating (Part number code)	TCR (ppm/°C)	Operating temperature
MFL@0805Rxxxx*?	0805 (2012 metric)	A	100 (1000)	±1% (F)	1/4 W (A)	± 200	-55 °C to +155 °C
MFL@0805Rxxxx*?	0805 (2012 metric)	A	110 (1100)	±1% (F)	1/4 W (A)	± 200	-55 °C to +155 °C
MFL@0805Rxxxx*?	0805 (2012 metric)	A	120 (1200)	±1% (F)	1/4 W (A)	± 200	-55 °C to +155 °C
MFL@0805Rxxxx*?	0805 (2012 metric)	A	130 (1300)	±1% (F)	1/4 W (A)	± 200	-55 °C to +155 °C
MFL@0805Rxxxx*?	0805 (2012 metric)	A	140 (1400)	±1% (F)	1/4 W (A)	± 200	-55 °C to +155 °C
MFL@0805Rxxxx*?	0805 (2012 metric)	A	150 (1500)	±1% (F)	1/4 W (A)	± 200	-55 °C to +155 °C
MFL@0805Rxxxx*?	0805 (2012 metric)	A	160 (1600)	±1% (F)	1/4 W (A)	± 200	-55 °C to +155 °C
MFL@0805Rxxxx*?	0805 (2012 metric)	A	180 (1800)	±1% (F)	1/4 W (A)	± 200	-55 °C to +155 °C
MFL@0805Rxxxx*?	0805 (2012 metric)	A	200 (2000)	±1% (F)	1/4 W (A)	± 200	-55 °C to +155 °C
MFL@0805Rxxxx*?	0805 (2012 metric)	A	220 (2200)	±1% (F)	1/4 W (A)	± 200	-55 °C to +155 °C
MFL@0805Rxxxx*?	0805 (2012 metric)	A	240 (2400)	±1% (F)	1/4 W (A)	± 200	-55 °C to +155 °C
MFL@0805Rxxxx*?	0805 (2012 metric)	A	250 (2500)	±1% (F)	1/4 W (A)	± 200	-55 °C to +155 °C
MFL@0805Rxxxx*?	0805 (2012 metric)	A	255 (2550)	±1% (F)	1/4 W (A)	± 200	-55 °C to +155 °C
MFL@0805Rxxxx*?	0805 (2012 metric)	A	270 (2700)	±1% (F)	1/4 W (A)	± 200	-55 °C to +155 °C
MFL@0805Rxxxx*?	0805 (2012 metric)	A	280 (2800)	±1% (F)	1/4 W (A)	± 200	-55 °C to +155 °C
MFL@0805Rxxxx*?	0805 (2012 metric)	A	300 (3000)	±1% (F)	1/4 W (A)	± 200	-55 °C to +155 °C
MFL@0805Rxxxx*?	0805 (2012 metric)	A	330 (3300)	±1% (F)	1/4 W (A)	± 200	-55 °C to +155 °C
MFL@0805Rxxxx*?	0805 (2012 metric)	A	360 (3600)	±1% (F)	1/4 W (A)	± 200	-55 °C to +155 °C
MFL@0805Rxxxx*?	0805 (2012 metric)	A	390 (3900)	±1% (F)	1/4 W (A)	± 200	-55 °C to +155 °C
MFL@0805Rxxxx*?	0805 (2012 metric)	A	400 (4000)	±1% (F)	1/4 W (A)	± 200	-55 °C to +155 °C
MFL@0805Rxxxx*?	0805 (2012 metric)	A	430 (4300)	±1% (F)	1/4 W (A)	± 200	-55 °C to +155 °C
MFL@0805Rxxxx*?	0805 (2012 metric)	A	470 (4700)	±1% (F)	1/4 W (A)	± 200	-55 °C to +155 °C
MFL@0805Rxxxx*?	0805 (2012 metric)	A	500 (5000)	±1% (F)	1/4 W (A)	± 200	-55 °C to +155 °C
MFL@0805Rxxxx*?	0805 (2012 metric)	A	510 (5100)	±1% (F)	1/4 W (A)	± 200	-55 °C to +155 °C
MFL@0805Rxxxx*?	0805 (2012 metric)	A	560 (5600)	±1% (F)	1/4 W (A)	± 200	-55 °C to +155 °C
MFL@0805Rxxxx*?	0805 (2012 metric)	A	620 (6200)	±1% (F)	1/4 W (A)	± 200	-55 °C to +155 °C
MFL@0805Rxxxx*?	0805 (2012 metric)	A	680 (6800)	±1% (F)	1/4 W (A)	± 200	-55 °C to +155 °C
MFL@0805Rxxxx*?	0805 (2012 metric)	A	750 (7500)	±1% (F)	1/4 W (A)	± 200	-55 °C to +155 °C
MFL@0805Rxxxx*?	0805 (2012 metric)	A	820 (8200)	±1% (F)	1/4 W (A)	± 200	-55 °C to +155 °C
MFL@0805Rxxxx*?	0805 (2012 metric)	A	910 (9100)	±1% (F)	1/4 W (A)	± 200	-55 °C to +155 °C
MFL@1206Rxxxx*?	1206 (3216 metric)	A	100 (1000)	±1% (F)	1/2 W (S)	± 200	-55 °C to +155 °C
MFL@1206Rxxxx*?	1206 (3216 metric)	A	110 (1100)	±1% (F)	1/2 W (S)	± 200	-55 °C to +155 °C
MFL@1206Rxxxx*?	1206 (3216 metric)	A	120 (1200)	±1% (F)	1/2 W (S)	± 200	-55 °C to +155 °C
MFL@1206Rxxxx*?	1206 (3216 metric)	A	130 (1300)	±1% (F)	1/2 W (S)	± 200	-55 °C to +155 °C
MFL@1206Rxxxx*?	1206 (3216 metric)	A	140 (1400)	±1% (F)	1/2 W (S)	± 200	-55 °C to +155 °C
MFL@1206Rxxxx*?	1206 (3216 metric)	A	150 (1500)	±1% (F)	1/2 W (S)	± 200	-55 °C to +155 °C
MFL@1206Rxxxx*?	1206 (3216 metric)	A	160 (1600)	±1% (F)	1/2 W (S)	± 200	-55 °C to +155 °C
MFL@1206Rxxxx*?	1206 (3216 metric)	A	180 (1800)	±1% (F)	1/2 W (S)	± 200	-55 °C to +155 °C
MFL@1206Rxxxx*?	1206 (3216 metric)	A	200 (2000)	±1% (F)	1/2 W (S)	± 200	-55 °C to +155 °C
MFL@1206Rxxxx*?	1206 (3216 metric)	A	220 (2200)	±1% (F)	1/2 W (S)	± 200	-55 °C to +155 °C

@= Enter grade option code from table above (A=Automotive)
Rxxxx = Enter resistance code option from table above xxx= resistance code (xxx.x mΩ ex: R1000 = 100.0 mΩ)
*= Enter resistance tolerance code option from table above (F= ±1%)
?= Enter power rating code option from table above (A = 1/4 W, S = 1/2 W, I = 3/4 W, C = 1 W)

Electrical specifications

Part number	Size	Grade option	Resistance value mΩ (Part number code)	Resistance tolerance (Part number code)	Power rating (Part number code)	TCR (ppm/°C)	Operating temperature
MFL@1206Rxxxx*?	1206 (3216 metric)	A	240 (2400)	±1% (F)	1/2 (S)	± 200	-55 °C to +155 °C
MFL@1206Rxxxx*?	1206 (3216 metric)	A	250 (2500)	±1% (F)	1/2 (S)	± 200	-55 °C to +155 °C
MFL@1206Rxxxx*?	1206 (3216 metric)	A	270 (2700)	±1% (F)	1/2 (S)	± 200	-55 °C to +155 °C
MFL@1206Rxxxx*?	1206 (3216 metric)	A	280 (2800)	±1% (F)	1/2 (S)	± 200	-55 °C to +155 °C
MFL@1206Rxxxx*?	1206 (3216 metric)	A	300 (3000)	±1% (F)	1/2 (S)	± 200	-55 °C to +155 °C
MFL@1206Rxxxx*?	1206 (3216 metric)	A	330 (3300)	±1% (F)	1/2 (S)	± 200	-55 °C to +155 °C
MFL@1206Rxxxx*?	1206 (3216 metric)	A	340 (3400)	±1% (F)	1/2 (S)	± 200	-55 °C to +155 °C
MFL@1206Rxxxx*?	1206 (3216 metric)	A	360 (3600)	±1% (F)	1/2 (S)	± 200	-55 °C to +155 °C
MFL@1206Rxxxx*?	1206 (3216 metric)	A	390 (3900)	±1% (F)	1/2 (S)	± 200	-55 °C to +155 °C
MFL@1206Rxxxx*?	1206 (3216 metric)	A	400 (4000)	±1% (F)	1/2 (S)	± 200	-55 °C to +155 °C
MFL@1206Rxxxx*?	1206 (3216 metric)	A	420 (4200)	±1% (F)	1/2 (S)	± 200	-55 °C to +155 °C
MFL@1206Rxxxx*?	1206 (3216 metric)	A	430 (4300)	±1% (F)	1/2 (S)	± 200	-55 °C to +155 °C
MFL@1206Rxxxx*?	1206 (3216 metric)	A	470 (4700)	±1% (F)	1/2 (S)	± 200	-55 °C to +155 °C
MFL@1206Rxxxx*?	1206 (3216 metric)	A	500 (5000)	±1% (F)	1/2 (S)	± 200	-55 °C to +155 °C
MFL@1206Rxxxx*?	1206 (3216 metric)	A	510 (5100)	±1% (F)	1/2 (S)	± 200	-55 °C to +155 °C
MFL@1206Rxxxx*?	1206 (3216 metric)	A	560 (5600)	±1% (F)	1/2 (S)	± 200	-55 °C to +155 °C
MFL@1206Rxxxx*?	1206 (3216 metric)	A	600 (6000)	±1% (F)	1/2 (S)	± 200	-55 °C to +155 °C
MFL@1206Rxxxx*?	1206 (3216 metric)	A	620 (6200)	±1% (F)	1/2 (S)	± 200	-55 °C to +155 °C
MFL@1206Rxxxx*?	1206 (3216 metric)	A	680 (6800)	±1% (F)	1/2 (S)	± 200	-55 °C to +155 °C
MFL@1206Rxxxx*?	1206 (3216 metric)	A	710 (7100)	±1% (F)	1/2 (S)	± 200	-55 °C to +155 °C
MFL@1206Rxxxx*?	1206 (3216 metric)	A	750 (7500)	±1% (F)	1/2 (S)	± 100	-55 °C to +155 °C
MFL@1206Rxxxx*?	1206 (3216 metric)	A	820 (8200)	±1% (F)	1/2 (S)	± 100	-55 °C to +155 °C
MFL@1206Rxxxx*?	1206 (3216 metric)	A	910 (9100)	±1% (F)	1/2 (S)	± 100	-55 °C to +155 °C
MFL@2010Rxxxx*?	2010 (5025 metric)	A	100 (1000)	±1% (F)	3/4 W (I)	± 200	-55 °C to +155 °C
MFL@2010Rxxxx*?	2010 (5025 metric)	A	120 (1200)	±1% (F)	3/4 W (I)	± 200	-55 °C to +155 °C
MFL@2010Rxxxx*?	2010 (5025 metric)	A	130 (1300)	±1% (F)	3/4 W (I)	± 200	-55 °C to +155 °C
MFL@2010Rxxxx*?	2010 (5025 metric)	A	150 (1500)	±1% (F)	3/4 W (I)	± 200	-55 °C to +155 °C
MFL@2010Rxxxx*?	2010 (5025 metric)	A	160 (1600)	±1% (F)	3/4 W (I)	± 200	-55 °C to +155 °C
MFL@2010Rxxxx*?	2010 (5025 metric)	A	180 (1800)	±1% (F)	3/4 W (I)	± 200	-55 °C to +155 °C
MFL@2010Rxxxx*?	2010 (5025 metric)	A	200 (2000)	±1% (F)	3/4 W (I)	± 200	-55 °C to +155 °C
MFL@2010Rxxxx*?	2010 (5025 metric)	A	220 (2200)	±1% (F)	3/4 W (I)	± 200	-55 °C to +155 °C
MFL@2010Rxxxx*?	2010 (5025 metric)	A	240 (2400)	±1% (F)	3/4 W (I)	± 200	-55 °C to +155 °C
MFL@2010Rxxxx*?	2010 (5025 metric)	A	250 (2500)	±1% (F)	3/4 W (I)	± 200	-55 °C to +155 °C
MFL@2010Rxxxx*?	2010 (5025 metric)	A	270 (2700)	±1% (F)	3/4 W (I)	± 200	-55 °C to +155 °C
MFL@2010Rxxxx*?	2010 (5025 metric)	A	300 (3000)	±1% (F)	3/4 W (I)	± 200	-55 °C to +155 °C
MFL@2010Rxxxx*?	2010 (5025 metric)	A	330 (3300)	±1% (F)	3/4 W (I)	± 200	-55 °C to +155 °C
MFL@2010Rxxxx*?	2010 (5025 metric)	A	360 (3600)	±1% (F)	3/4 W (I)	± 200	-55 °C to +155 °C
MFL@2010Rxxxx*?	2010 (5025 metric)	A	390 (3900)	±1% (F)	3/4 W (I)	± 200	-55 °C to +155 °C
MFL@2010Rxxxx*?	2010 (5025 metric)	A	400 (4000)	±1% (F)	3/4 W (I)	± 200	-55 °C to +155 °C
MFL@2010Rxxxx*?	2010 (5025 metric)	A	430 (4300)	±1% (F)	3/4 W (I)	± 200	-55 °C to +155 °C
MFL@2010Rxxxx*?	2010 (5025 metric)	A	470 (4700)	±1% (F)	3/4 W (I)	± 200	-55 °C to +155 °C
MFL@2010Rxxxx*?	2010 (5025 metric)	A	500 (5000)	±1% (F)	3/4 W (I)	± 200	-55 °C to +155 °C

@= Enter grade option code from table above (A=Automotive)

Rxxxx = Enter resistance code option from table above xxxx= resistance code (xxx.x mΩ ex: R1000 = 100.0 mΩ)

*= Enter resistance tolerance code option from table above (F= ±1%)

?= Enter power rating code option from table above (A = 1/4 W, S = 1/2 W, I = 3/4 W, C = 1 W)

Electrical specifications

Part number	Size	Grade option	Resistance value mΩ (Part number code)	Resistance tolerance (Part number code)	Power rating (Part number code)	TCR (ppm/°C)	Operating temperature
MFL@2010Rxxxx*?	2010 (5025 metric)	A	510 (5100)	±1% (F)	3/4 W (I)	± 200	-55 °C to +155 °C
MFL@2010Rxxxx*?	2010 (5025 metric)	A	560 (5600)	±1% (F)	3/4 W (I)	± 200	-55 °C to +155 °C
MFL@2010Rxxxx*?	2010 (5025 metric)	A	620 (6200)	±1% (F)	3/4 W (I)	± 200	-55 °C to +155 °C
MFL@2010Rxxxx*?	2010 (5025 metric)	A	680 (6800)	±1% (F)	3/4 W (I)	± 200	-55 °C to +155 °C
MFL@2010Rxxxx*?	2010 (5025 metric)	A	750 (7500)	±1% (F)	3/4 W (I)	± 200	-55 °C to +155 °C
MFL@2010Rxxxx*?	2010 (5025 metric)	A	820 (8200)	±1% (F)	3/4 W (I)	± 200	-55 °C to +155 °C
MFL@2010Rxxxx*?	2010 (5025 metric)	A	910 (9100)	±1% (F)	3/4 W (I)	± 200	-55 °C to +155 °C
MFL@2512Rxxxx*?	2512 (6432 metric)	A	100 (1000)	±1% (F)	1 W (C)	± 200	-55 °C to +155 °C
MFL@2512Rxxxx*?	2512 (6432 metric)	A	110 (1100)	±1% (F)	1 W (C)	± 200	-55 °C to +155 °C
MFL@2512Rxxxx*?	2512 (6432 metric)	A	120 (1200)	±1% (F)	1 W (C)	± 200	-55 °C to +155 °C
MFL@2512Rxxxx*?	2512 (6432 metric)	A	130 (1300)	±1% (F)	1 W (C)	± 200	-55 °C to +155 °C
MFL@2512Rxxxx*?	2512 (6432 metric)	A	140 (1400)	±1% (F)	1 W (C)	± 200	-55 °C to +155 °C
MFL@2512Rxxxx*?	2512 (6432 metric)	A	150 (1500)	±1% (F)	1 W (C)	± 200	-55 °C to +155 °C
MFL@2512Rxxxx*?	2512 (6432 metric)	A	160 (1600)	±1% (F)	1 W (C)	± 200	-55 °C to +155 °C
MFL@2512Rxxxx*?	2512 (6432 metric)	A	170 (1700)	±1% (F)	1 W (C)	± 200	-55 °C to +155 °C
MFL@2512Rxxxx*?	2512 (6432 metric)	A	180 (1800)	±1% (F)	1 W (C)	± 200	-55 °C to +155 °C
MFL@2512Rxxxx*?	2512 (6432 metric)	A	200 (2000)	±1% (F)	1 W (C)	± 200	-55 °C to +155 °C
MFL@2512Rxxxx*?	2512 (6432 metric)	A	220 (2200)	±1% (F)	1 W (C)	± 200	-55 °C to +155 °C
MFL@2512Rxxxx*?	2512 (6432 metric)	A	240 (2400)	±1% (F)	1 W (C)	± 200	-55 °C to +155 °C
MFL@2512Rxxxx*?	2512 (6432 metric)	A	250 (2500)	±1% (F)	1 W (C)	± 200	-55 °C to +155 °C
MFL@2512Rxxxx*?	2512 (6432 metric)	A	270 (2700)	±1% (F)	1 W (C)	± 200	-55 °C to +155 °C
MFL@2512Rxxxx*?	2512 (6432 metric)	A	280 (2800)	±1% (F)	1 W (C)	± 200	-55 °C to +155 °C
MFL@2512Rxxxx*?	2512 (6432 metric)	A	300 (3000)	±1% (F)	1 W (C)	± 200	-55 °C to +155 °C
MFL@2512Rxxxx*?	2512 (6432 metric)	A	330 (3300)	±1% (F)	1 W (C)	± 200	-55 °C to +155 °C
MFL@2512Rxxxx*?	2512 (6432 metric)	A	360 (3600)	±1% (F)	1 W (C)	± 200	-55 °C to +155 °C
MFL@2512Rxxxx*?	2512 (6432 metric)	A	390 (3900)	±1% (F)	1 W (C)	± 200	-55 °C to +155 °C
MFL@2512Rxxxx*?	2512 (6432 metric)	A	400 (4000)	±1% (F)	1 W (C)	± 200	-55 °C to +155 °C
MFL@2512Rxxxx*?	2512 (6432 metric)	A	420 (4200)	±1% (F)	1 W (C)	± 200	-55 °C to +155 °C
MFL@2512Rxxxx*?	2512 (6432 metric)	A	430 (4300)	±1% (F)	1 W (C)	± 200	-55 °C to +155 °C
MFL@2512Rxxxx*?	2512 (6432 metric)	A	470 (4700)	±1% (F)	1 W (C)	± 200	-55 °C to +155 °C
MFL@2512Rxxxx*?	2512 (6432 metric)	A	500 (5000)	±1% (F)	1 W (C)	± 200	-55 °C to +155 °C
MFL@2512Rxxxx*?	2512 (6432 metric)	A	510 (5100)	±1% (F)	1 W (C)	± 200	-55 °C to +155 °C
MFL@2512Rxxxx*?	2512 (6432 metric)	A	560 (5600)	±1% (F)	1 W (C)	± 200	-55 °C to +155 °C
MFL@2512Rxxxx*?	2512 (6432 metric)	A	600 (6000)	±1% (F)	1 W (C)	± 200	-55 °C to +155 °C
MFL@2512Rxxxx*?	2512 (6432 metric)	A	620 (6200)	±1% (F)	1 W (C)	± 200	-55 °C to +155 °C
MFL@2512Rxxxx*?	2512 (6432 metric)	A	680 (6800)	±1% (F)	1 W (C)	± 200	-55 °C to +155 °C
MFL@2512Rxxxx*?	2512 (6432 metric)	A	750 (7500)	±1% (F)	1 W (C)	± 200	-55 °C to +155 °C
MFL@2512Rxxxx*?	2512 (6432 metric)	A	800 (8000)	±1% (F)	1 W (C)	± 200	-55 °C to +155 °C
MFL@2512Rxxxx*?	2512 (6432 metric)	A	820 (8200)	±1% (F)	1 W (C)	± 200	-55 °C to +155 °C
MFL@2512Rxxxx*?	2512 (6432 metric)	A	910 (9100)	±1% (F)	1 W (C)	± 200	-55 °C to +155 °C



@= Enter grade option code from table above (A=Automotive)
Rxxxx = Enter resistance code option from table above xxx= resistance code (xxx.x mΩ ex: R1000 = 100.0 mΩ)
* = Enter resistance tolerance code option from table above (F= ±1%)
? = Enter power rating code option from table above (A = 1/4 W, S = 1/2 W, I = 3/4 W, C = 1 W)

Packaging information- mm

Supplied in tape and reel on a 7.0" diameter reel (EIA-481 compliant)


Size	Tape	Quantity
0805	7 inch paper	5K
1206	7 inch paper	5K
2010	7 inch embossed	4K
2512	7 inch embossed	4K

Tape carrier and dimensions

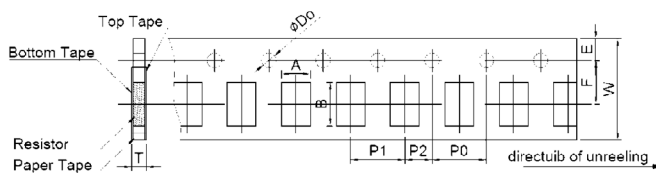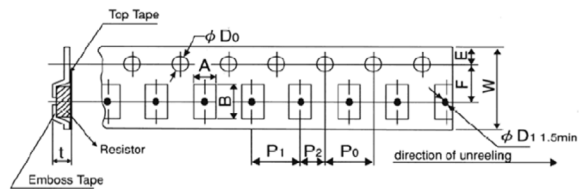

Dimension	0805	1206	2010	2512
E	1.75 ± 0.1	1.75 ± 0.1	1.75 ± 0.1	1.75 ± 0.1
F	3.5 ± 0.05	3.5 ± 0.05	5.5 ± 0.05	5.5 ± 0.05
P2	2.0 ± 0.1	2.0 ± 0.1	2.0 ± 0.1	2.0 ± 0.1
D0	1.50 ± 0.1	1.50 ± 0.1	1.50 ± 0.1	1.50 ± 0.1
P0	4.0 ± 0.1	4.0 ± 0.1	4.0 ± 0.1	4.0 ± 0.1
W	8.0 ± 0.1	8.0 ± 0.1	12.0 ± 0.1	12.0 ± 0.1
P1	4.0 ± 0.1	4.0 ± 0.1	4.0 ± 0.1	4.0 ± 0.1
A0	1.6 ± 0.15	2.0 ± 0.15	2.8 ± 0.2	3.6 ± 0.2
B0	2.4 ± 0.2	3.6 ± 0.2	5.3 ± 0.2	6.9 ± 0.2
T	0.84 ± 0.1	0.84 ± 0.1	0.85 ± 0.15	0.85 ± 0.1

Reel dimensions

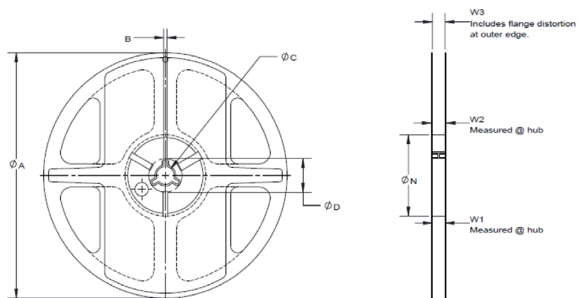


Size	A	B	C	D	N	W1	W2	W3
0805	178 ± 2.0	3.5 ± 0.5	13.0 ± 1.0	na	60 ± 1.0	9.0 ± 1.0	11.4 ± 1.0	na
1206	178 ± 2.0	3.5 ± 0.5	13.0 ± 1.0	na	60 ± 1.0	9.0 ± 1.0	11.4 ± 1.0	na
2010	178 ± 2.0	3.5 ± 0.5	13.0 ± 1.0	na	60 ± 1.0	13.0 ± 1.0	15.5 ± 1.0	na
2512	178 ± 2.0	3.5 ± 0.5	13.0 ± 1.0	na	60 ± 1.0	13.0 ± 1.0	15.5 ± 1.0	na

General specifications

Temperature coefficient of resistance: IEC60115-1 4.8, +25 to +125 °C
Short time overload: IEC60115-1 4.13, 2.5 X rated power for 5 s
High temperature exposure (storage): AEC-Q200-REV D-Test 3, MIL-STD202 Method 108, 1000 hours, +125 °C
Temperature cycling: AEC-Q200-REV D-Test 4, JESD22 Method JA-104, 1000 Cycles (-55 °C to +125 °C)
Moisture resistance: AEC-Q200-REV D-Test 6 , MIL-STD-202 Method 106, T=24 hours / Cycle ,10 Cycles, Notes: Steps 7a& 7b not required. Unpowered, < ±1%
Biased humidity: AEC-Q200-REV D-Test 7, MIL-STD-202 Method 103, 1000 hours +85 °C/85% RH. Note: Specified conditions: 10% of operating power (not exceeding max working voltage).
Operational life: AEC-Q200-REV D-Test 8, MIL-STD-202 Method 108, 1000 hours, +125 °C at 35% rated power
Resistance to solvents: AEC-Q200-REV D-Test 12, MIL-STD-202 Method 215, a: Isopropyl Alcohol : Mineral Spirits= 1 : 3, b: Terpene Defluxer (Bioact EC-7R) c: Deionized water : Propylene Glycol Monomethyl Ether : monoethanolamine = 42 : 1 : 1, Marking and protective layer cannot be detached
Mechanical shock: AEC-Q200-REV D-Test 13, MIL-STD-202 Method 213, Wave Form Peak value is 100 g's. 6 ms
Vibration: AEC-Q200-REV D-Test 14, MIL-STD-202 Method 204, 5 g's for 20 min., 12 cycles each of 3 orientations
Resistance to soldering heat: AEC-Q200-REV D-Test 15, MIL-STD-202 Method 210, Condition B : Immerse the specimens in and eutectic solder at +260 ± 5 °C for 10 ± 1 s
Thermal shock: AEC-Q200-REV D-Test 16, MIL-STD-202 Method 107, -55 °C/+155 °C. Note: Number of cycles required 300, Maximum transfer time 20 seconds, Dwell time 15 minutes. Air-Air. < ±1.0%
ESD: AEC-Q200-REV D-Test 17, AEC-Q200-002 or ISO/DIS 10605, verify the voltage setting at 500 V, < ±1.0%
Solderability: AEC-Q200-REV D-Test 18, J-STD-002, Method B, aging 4 hours at 155 °C dry heat Lead-free solder bath at 235 ± 3 °C, Dipping time: 3 ± 0.5 seconds, > 95% area covered with tin
Flammability: AEC-Q200-REV D-Test 20, UL-94, V-0 or V-1 are acceptable. Electrical test not required. V-0 or V-1
Board flex (bending): AEC-Q200-REV D-Test 21, AEC-Q200-005, The duration of the applied forces shall be 60 (+ 5) Sec, 2 mm deflection. < ±1.0%
Terminal strength (SMD): AEC-Q200-REV D-Test 22, AEC-Q200-006, Force of 1.0 kg for 60 seconds, Remarks : 0201-NA, < ±1.0%

Temperature derating curve

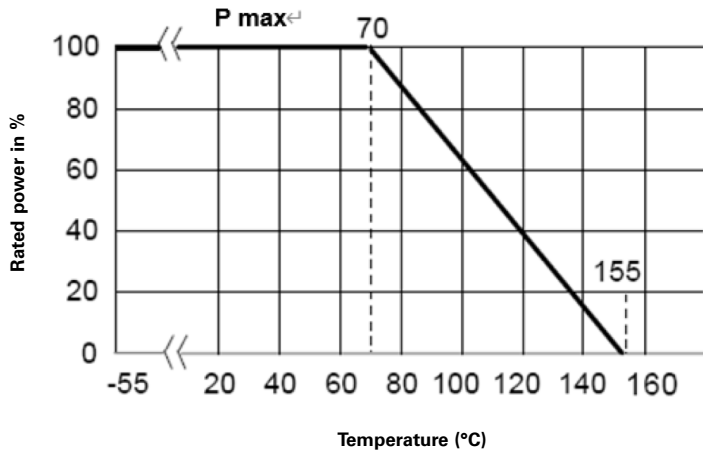

Rated current & voltage

The rated Current and Voltage are calculated by the following formula:

$$I = \sqrt{P \div R}$$

$$V = \sqrt{P \times R}$$


I: Rated current (A)

V: Rated voltage (V)

P: Rated power (W)

R: Resistance value (Ω)

Solder reflow profile

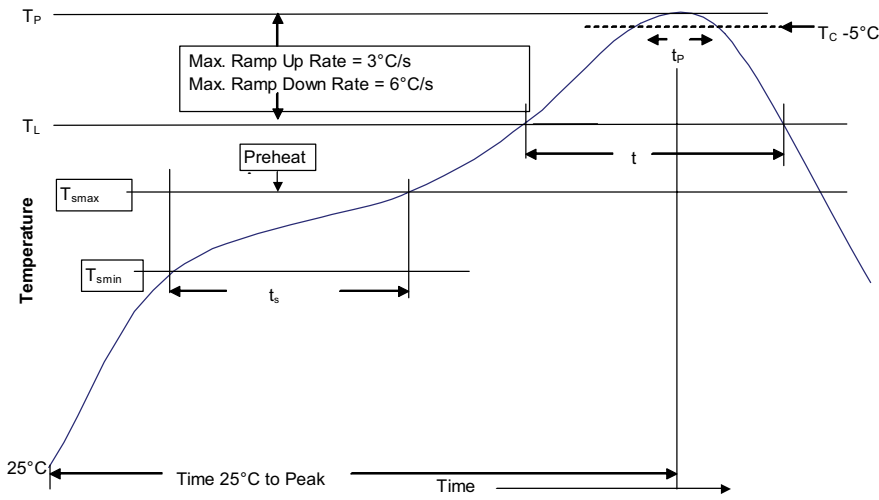

Profile feature	Lead (Pb) free solder
Preheat and soak	
• Temperature min. (T_{smin})	150 °C
• Temperature max. (T_{smax})	200 °C
• Time (T_{smin} to T_{smax}) (t_s)	60-150 seconds
Ramp up rate T_L to T_p	3 °C/ second max.
Liquidous temperature (T_L)	217 °C
Time (t_L) maintained above T_L	60-120 seconds
Peak package body temperature (T_p)*	260 °C
Time (t_p)* within 5 °C of the specified classification temperature (T_c)	10 seconds*
Ramp-down rate (T_p to T_L)	6 °C/ second max.
Time 25 °C to peak temperature	8 minutes max.

* Tolerance for peak profile temperature (T_p) is defined as a supplier minimum and a user maximum.

Manual solder

+350 °C ±10 °C , 3 +1/0 seconds 1 time (by soldering iron), generally manual, hand soldering is not recommended

Life Support Policy: Eaton does not authorize the use of any of its products for use in life support devices or systems without the express written approval of an officer of the Company. Life support systems are devices which support or sustain life, and whose failure to perform, when properly used in accordance with instructions for use provided in the labeling, can be reasonably expected to result in significant injury to the user.

Eaton reserves the right, without notice, to change design or construction of any products and to discontinue or limit distribution of any products. Eaton also reserves the right to change or update, without notice, any technical information contained in this bulletin.

Eaton
Electronics Division
1000 Eaton Boulevard
Cleveland, OH 44122
United States
Eaton.com/electronics

© 2022 Eaton
All Rights Reserved
Printed in USA
Publication No. ELX1182 BU-ELX22042
June 2022

Eaton is a registered trademark.

All other trademarks are property of their respective owners.

Follow us on social media to get the latest product and support information.



X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Current Sense Resistors - SMD category](#):

Click to view products by [Eaton manufacturer](#):

Other Similar products are found below :

[CRL0603-FW-R700ELF](#) [PFS35-200RF1](#) [CD2015FC-0.10-1%](#) [PR2512FKF7W0R004L](#) [RC1005F124CS](#) [CSNL2512FT5L00](#)

[RL73K3AR56JTDF](#) [RL7520WT-R001-F](#) [RL7520WT-R020-F](#) [LRC-LR2512LF-01-R820J](#) [65709-330](#) [SP1R12J](#) [RL7520WT-R039-G](#)

[RL7520WT-R002-F](#) [RL7520WT-R005-F](#) [KRL1632E-C-R200-F-T5](#) [KRL1632E-C-R200-F-T1](#) [Y14880R02000B9R](#) [RLP73M2AR075FTDF](#)

[SR731ERTTP5R10F](#) [SR731ERTTP100J](#) [SR731ERTTP6R80F](#) [SR731ERTTP3R9J](#) [SR731ERTTP8R2J](#) [SR731ERTTP2R0J](#)

[SR731ERTTP4R7J](#) [SR731ERTTP9R1J](#) [SR731ERTTP1R0J](#) [SR731ERTTP2R2J](#) [SR731ERTTP5R1J](#) [SR731ERTTP6R8J](#) [SR731ERTTP9R10F](#)

[FCSL64R007JER](#) [73L4R10G](#) [73L4R75G](#) [73L4R33G](#) [73M1R051F](#) [73WL4R020J](#) [73L2R68J](#) [73L2R22J](#) [73L2R33J](#) [CC1512FC-0.015-5%](#)

[ULRG2-2512-R0075-F-LF-SLT](#) [KDV08DR220ET](#) [KDV12DR240ET](#) [SLN3TTED80L6F](#) [JW104X15X4](#) [JW105X19X5](#) [HVR06FTEV2403](#)

[JW104X5X4](#)