

MPI5451

High current, low profile power inductors



Applications

- Handheld/mobile devices
- Portable media players
- MP3 Players
- Battery operated devices
- Notebook/netbook
- Tablets/smartbooks
- LCD Displays
- LED Drivers

Environmental data

- Storage temperature range (Component): -40°C to +125°C
- Operating temperature range: -40°C to +125°C (ambient + self-temperature rise)
- Solder reflow temperature: J-STD-020D compliant

Product description

- Halogen free, lead free, RoHS compliant
- 125°C maximum total temperature operation
- 5.74 x 5.43 footprint surface mount package with either 1.2 or 2.0mm heights
- Magnetically shielded, low EMI
- Rugged construction
- Inductance range from 0.33µH to 15µH
- Current range from 1.1 to 11.5 amps

Packaging

- Supplied in tape and reel packaging on a 13" diameter reel



Discontinued, Effective February 1, 2016 or until inventory is depleted. No recommendation available replacement available


Product specifications

Part Number ⁵	OCL ¹ (μH) $\pm 20\%$	I_{rms}^2 (Amps)	I_{sat}^3 (Amps)	DCR ($\text{m}\Omega$) @ 25°C $\pm 20\%$	K-Factor ⁴
R1 - 1.2mm height					
MPI5451R1-R33-R	0.33	6.5	11.5	13	1244
MPI5451R1-R47-R	0.47	6.1	10.9	18	995
MPI5451R1-1R0-R	1.0	4.2	7.2	30	622
MPI5451R1-1R5-R	1.5	3.4	6.1	48	498
MPI5451R1-2R2-R	2.2 $\pm 15\%$	2.6	4.8	70	452
MPI5451R1-3R3-R	3.3 $\pm 15\%$	2.3	3.8	95	355
MPI5451R1-4R7-R	4.7 $\pm 15\%$	2.1	3.5	120	293
MPI5451R1-5R6-R	5.6 $\pm 15\%$	1.9	3.1	145	249
MPI5451R1-6R8-R	6.8 $\pm 15\%$	1.7	2.8	175	237
MPI5451R1-100-R	10.0 $\pm 15\%$	1.3	2.5	290	199
MPI5451R1-150-R	15.0 $\pm 15\%$	1.1	2.2	400	155
R3 - 2.0mm height					
MPI5451R3-R47-R	0.47	6.0	9.0	8.8	1244
MPI5451R3-R68-R	0.68	5.9	8.0	9.5	995
MPI5451R3-1R0-R	1.0	5.1	6.6	14	711
MPI5451R3-1R5-R	1.5	5.0	5.8	16	553
MPI5451R3-2R2-R	2.2	4.1	5.0	24	452
MPI5451R3-3R3-R	3.3	3.7	4.2	33	383
MPI5451R3-4R7-R	4.7	3.0	3.8	50	293
MPI5451R3-6R8-R	6.8	2.6	3.0	70	249
MPI5451R3-100-R	10.0	2.1	2.4	110	207

- Open Circuit Inductance (OCL) Test Parameters: 100kHz, 0.1V_{rms}, 0.0Adc, 25°C
- I_{rms} : DC current for an approximate temperature rise of 40°C without core loss. Derating is necessary for AC currents. PCB layout, trace thickness and width, air-flow, and proximity of other heat generating components will affect the temperature rise. It is recommended that the temperature of the part not exceed 125°C under worst case operating conditions verified in the end application.
- I_{sat} : Peak current for approximately 20% rolloff at +25°C


- K-factor: Used to determine B_{pp} for core loss (see graph). $B_{\text{pp}} = K * L * \Delta I$. B_{pp} : (Gauss), K: (K-factor from table), L: (Inductance in μH), ΔI : (Peak to peak ripple current in Amps).
- Part Number Definition: MPI5451Rx-yyy-R
 - MPI5451Rx = Product code and size
 - yyy= Inductance value in μH , R = decimal point, if no R is present then third character = number of zeros
 - "R" suffix = RoHS compliant

Dimensions - mm

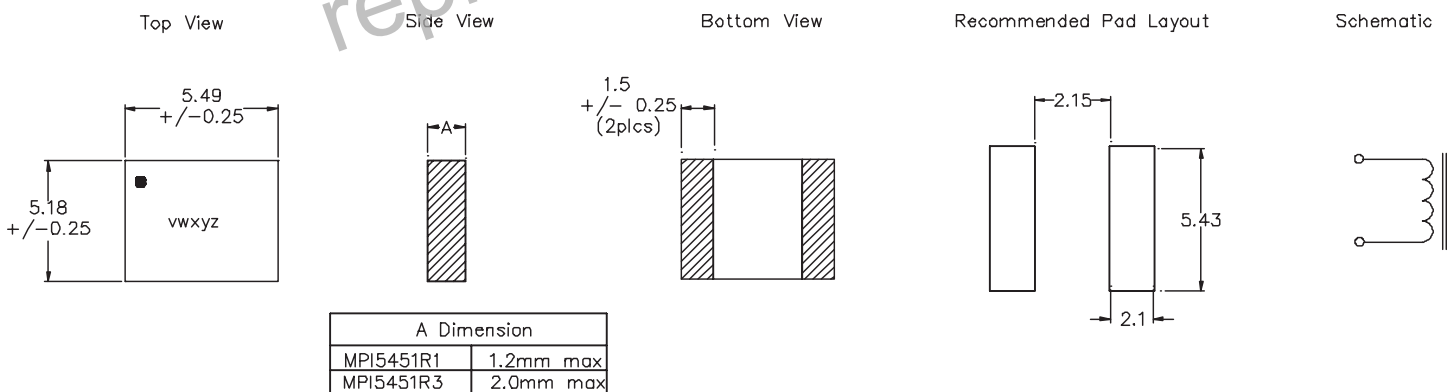

Part Marking : wxyz
 v = height: 1 = R1 (1.2mm), 3 = R3 (2.0mm)
 w = inductance value per the "Part Marking Designator" letter code in table above
 x = Bi-weekly date code
 y = Last digit of year manufactured
 z = Revision level



Packaging information - mm

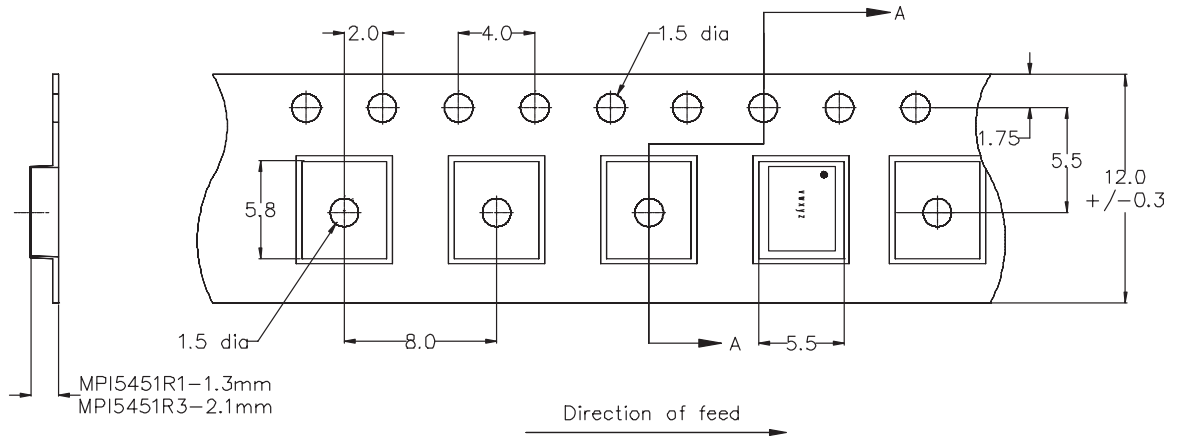

Section A-A







Supplied in tape and reel packaging.
MPI5451R1 4000 parts per 13" diameter reel
MPI5451R3 3000 parts per 13" diameter reel

Core loss





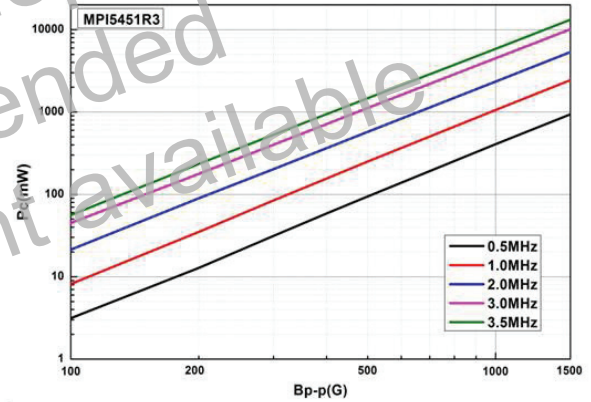
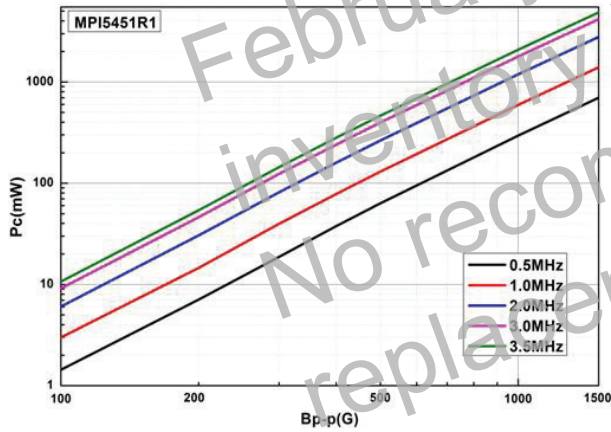


Discontinued, Effective February 1, 2016 or until inventory is depleted. No recommendation for replacement available.

Inductance characteristics / temperature rise

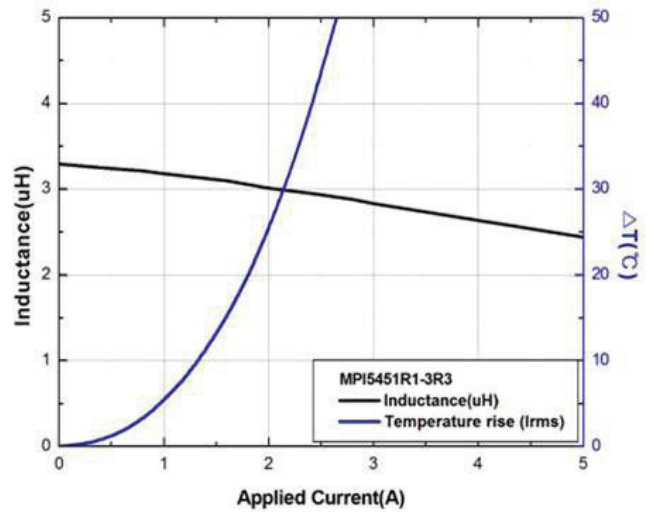
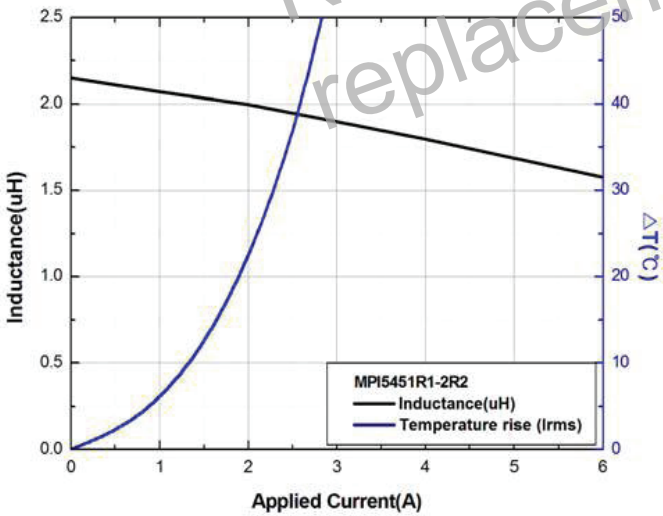
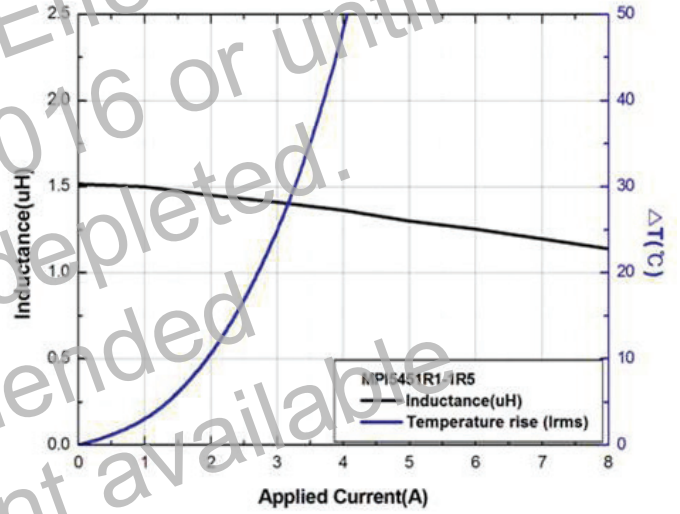
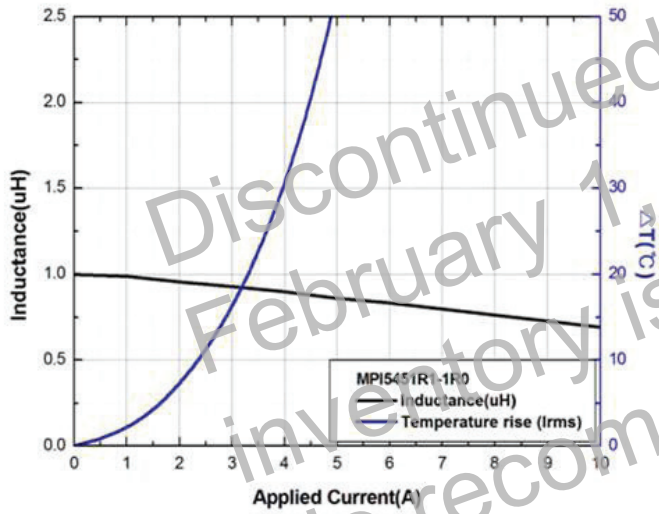
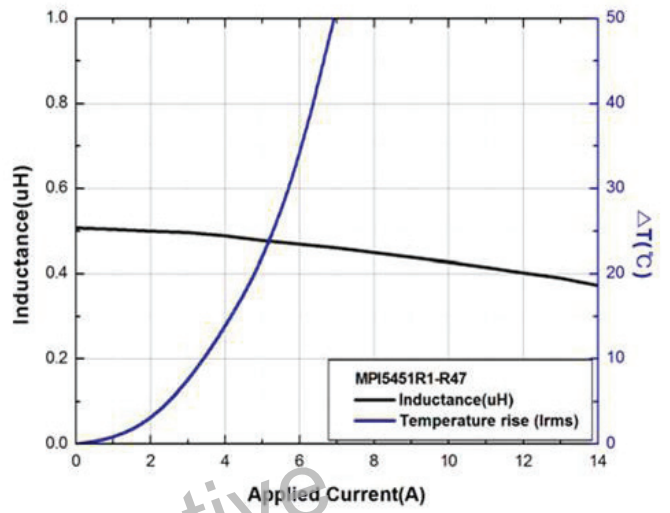
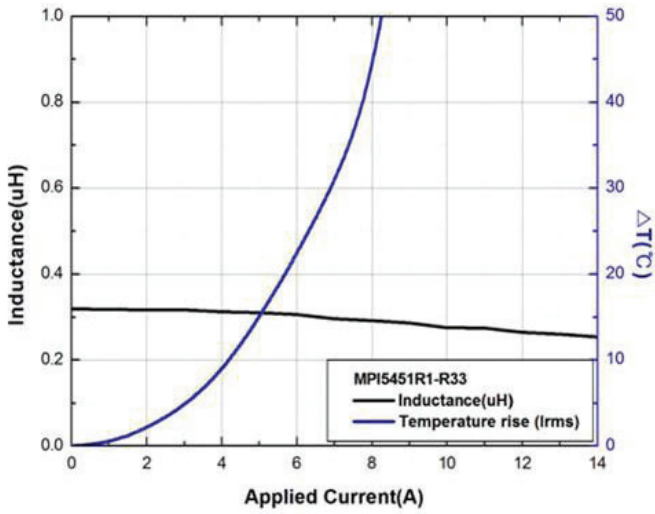


Inductance characteristics / temperature rise

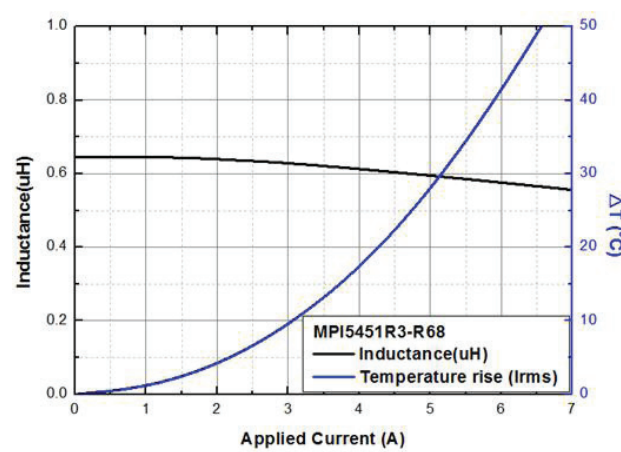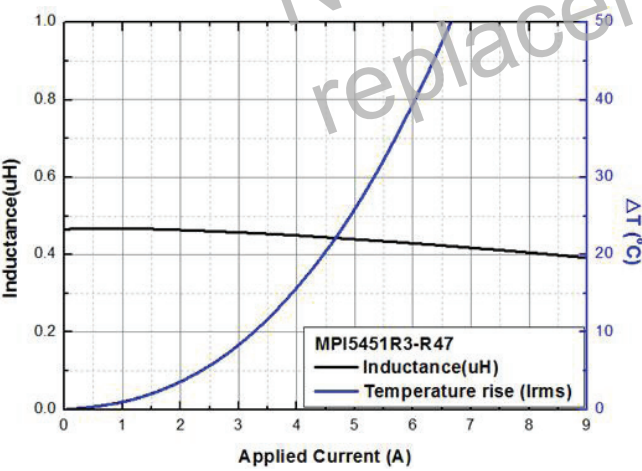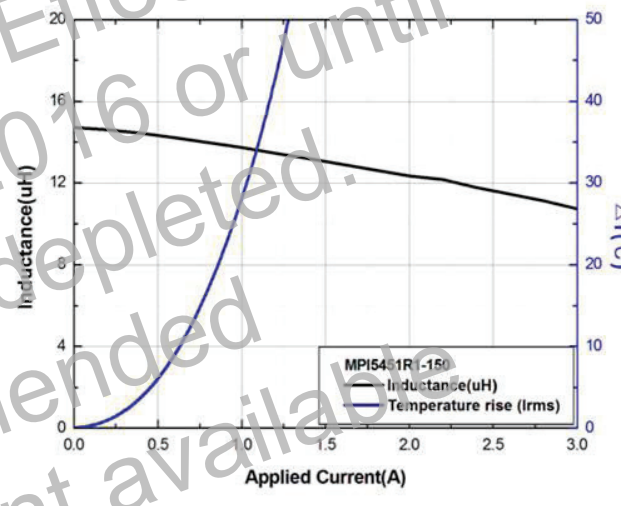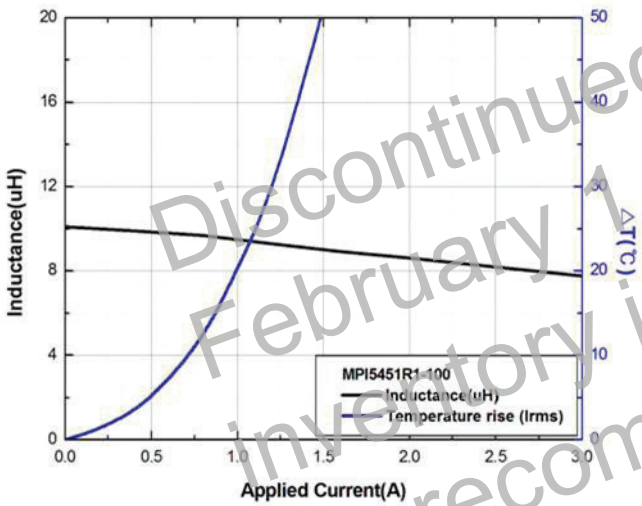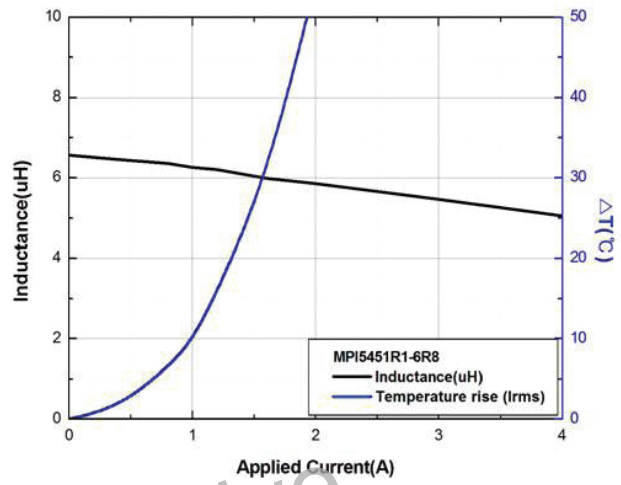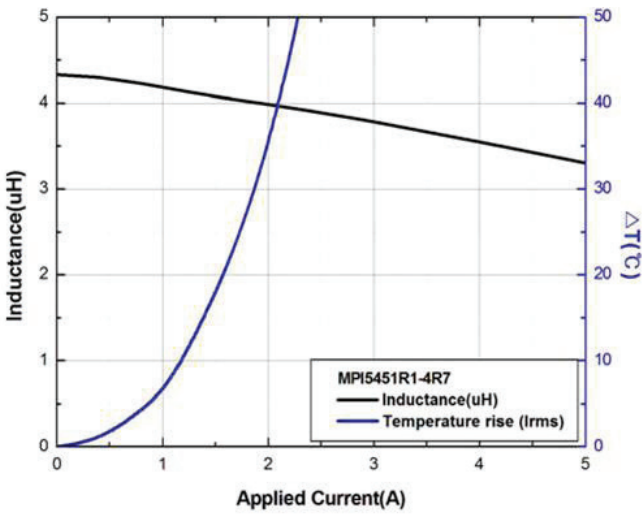


Discontinued, Effective February 1, 2016 or until inventory is depleted. No replacement available

Inductance characteristics / temperature rise

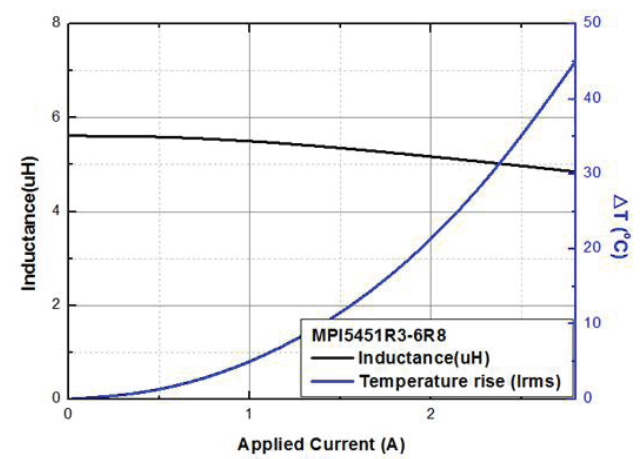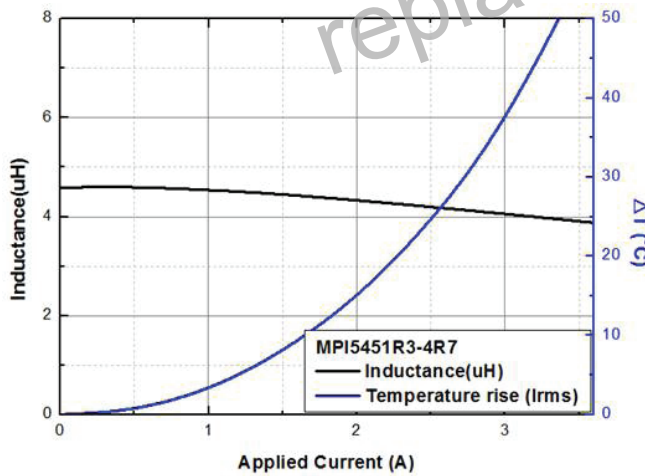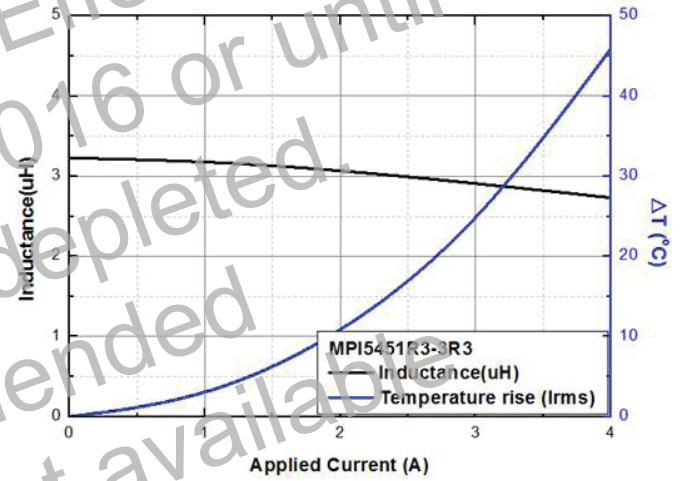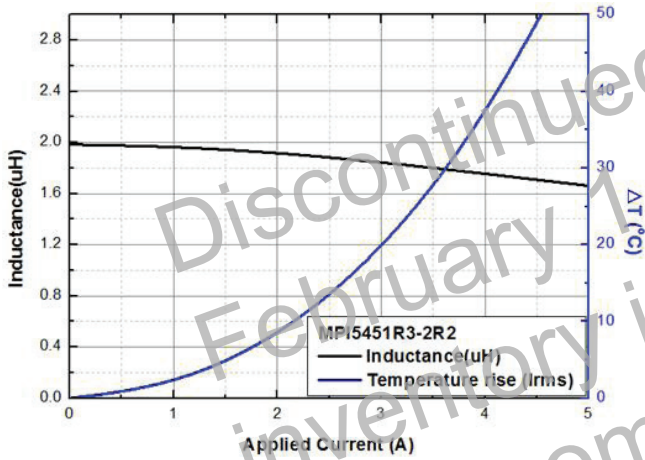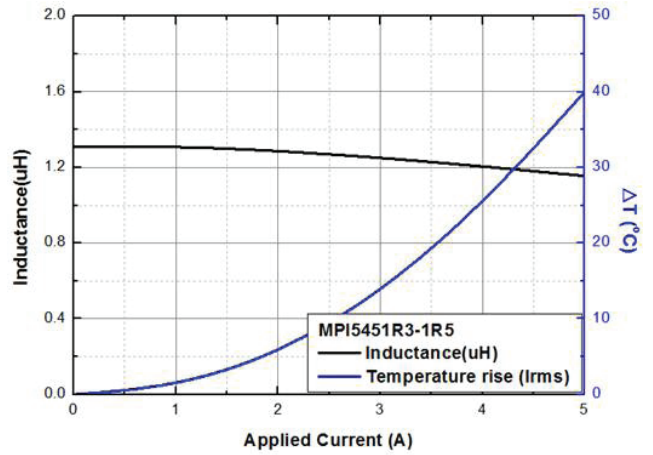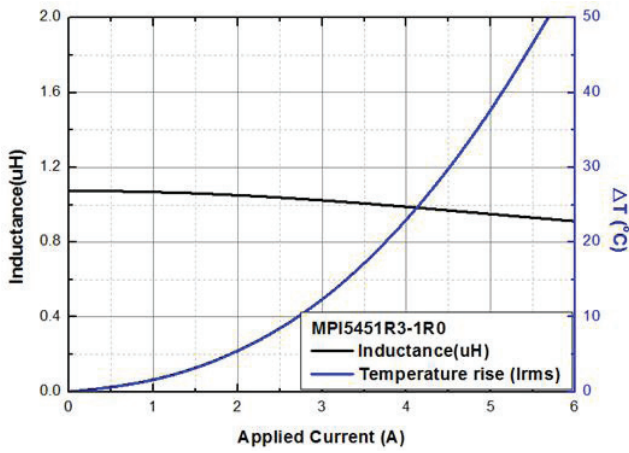

Discontinued, Effective
February 1, 2016 or until
inventory is depleted.
No recommendation
replacement available

Inductance characteristics / temperature rise

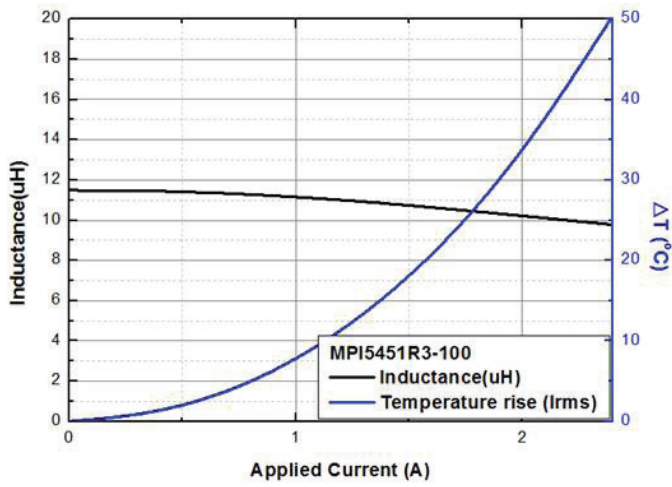

Discontinued, Effective
February 1, 2016 or until
inventory is depleted.
No recommended
replacement available

Solder reflow profile

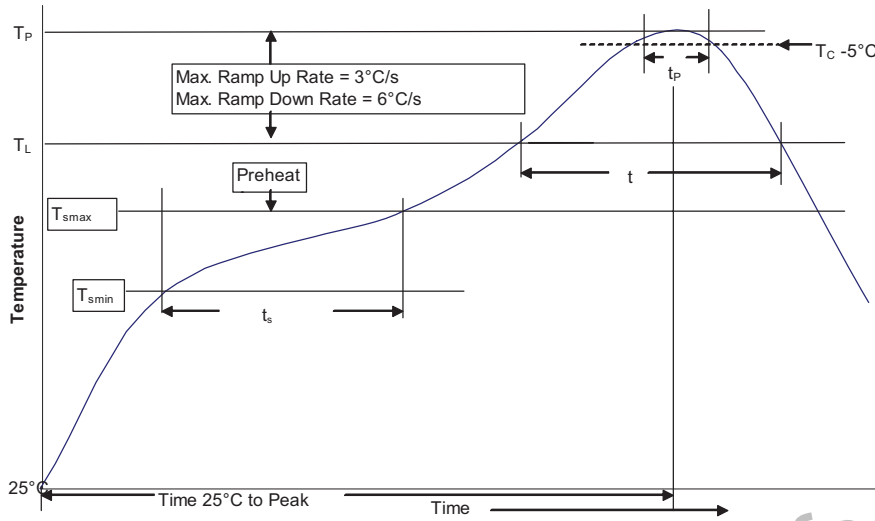


Table 1 - Standard SnPb Solder (T_C)

Package Thickness	Volume mm^3 <350	Volume mm^3 ≥ 350
<2.5mm	235°C	220°C
$\geq 2.5\text{mm}$	220°C	220°C

Table 2 - Lead (Pb) Free Solder (T_C)

Package Thickness	Volume mm^3 <350	Volume mm^3 350 - 2000	Volume mm^3 >2000
<1.6mm	260°C	260°C	260°C
1.6 – 2.5mm	260°C	250°C	245°C
>2.5mm	250°C	245°C	245°C

Reference JDEC J-STD-020D

Profile Feature	Standard SnPb Solder	Lead (Pb) Free Solder
Preheat and Soak		
• Temperature min. (T_{smin})	100°C	150°C
• Temperature max. (T_{smax})	150°C	200°C
• Time (T_{smin} to T_{smax}) (t_s)	60-120 Seconds	60-120 Seconds
Average ramp up rate T_{smax} to T_p	3°C/ Second Max.	3°C/ Second Max.
Liquidous temperature (T_L)	183°C	217°C
Time at liquidous (t_L)	60-150 Seconds	60-150 Seconds
Peak package body temperature (T_p)	Table 1	Table 2
Time (t_p)** within 5 °C of the specified classification temperature (T_C)	20 Seconds**	30 Seconds**
Average ramp-down rate (T_p to T_{smax})	6°C/ Second Max.	6°C/ Second Max.
Time 25°C to Peak Temperature	6 Minutes Max.	8 Minutes Max.

* Tolerance for peak profile temperature (T_p) is defined as a supplier minimum and a user maximum.

** Tolerance for time at peak profile temperature (t_p) is defined as a supplier minimum and a user maximum.

Life Support Policy: Eaton does not authorize the use of any of its products for use in life support devices or systems without the express written approval of an officer of the Company. Life support systems are devices which support or sustain life, and whose failure to perform, when properly used in accordance with instructions for use provided in the labeling, can be reasonably expected to result in significant injury to the user.

Eaton reserves the right, without notice, to change design or construction of any products and to discontinue or limit distribution of any products. Eaton also reserves the right to change or update, without notice, any technical information contained in this bulletin.

Eaton
Electronics Division
1000 Eaton Boulevard
Cleveland, OH 44122
United States
www.eaton.com/elx



© 2014 Eaton
All Rights Reserved
Publication No. 10247 – BU-SB14346
June 2014

Eaton is a registered trademark.

All other trademarks are property of their respective owners.

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Fixed Inductors](#) category:

Click to view products by [Eaton](#) manufacturer:

Other Similar products are found below :

[CR43NP-680KC](#) [CR54NP-820KC](#) [CR54NP-8R5MC](#) [CTX32CT-100](#) [70F224AI](#) [MGDQ4-00004-P](#) [MHL1ECTTP18NJ](#) [MHL1JCTTD12NJ](#)
[PE-51506NL](#) [PE-53601NL](#) [PE-53602NL](#) [PE-53630NL](#) [PE-53824SNLT](#) [PE-92100NL](#) [PG0434.801NLT](#) [PG0936.113NLT](#) [9310-16](#) [PM06-2N7](#) [PM06-39NJ](#) [A01TK](#) [1206CS-471XJ](#) [HC2-2R2TR](#) [HC2LP-R47-R](#) [HC3-2R2-R](#) [1206CS-151XG](#) [RCH664NP-140L](#) [RCH664NP-4R7M](#)
[RCH8011NP-221L](#) [RCP1317NP-332L](#) [RCP1317NP-391L](#) [RCR1010NP-470M](#) [RCR110DNP-331L](#) [DH2280-4R7M](#) [DS1608C-106](#) [ASPI-4020HI-R10M-T](#) [B10TJ](#) [B82477P4333M](#) [B82498B3101J000](#) [B82498B3680J000](#) [ELJ-RE27NJF2](#) [1812CS-153XJ](#) [1812CS-183XJ](#) [1812CS-223XJ](#) [1812LS-104XJ](#) [1812LS-105XJ](#) [1812LS-124XJ](#) [1812LS-154XJ](#) [1812LS-223XJ](#) [1812LS-224XJ](#) [1812LS-563XJ](#)