

REN (250V) and RES (600V) Renewable Class H size fuses



Description:

Non-current limiting, renewable 250V (REN) and 600V (RES) Class H size fuses and fuse links (250V LKN and 600V LKS) for use in electrical systems where the available fault current is less than 10,000 amps and frequent outages dictate the economy of these renewable type fuses.

NOTE: The 70-600 amp ratings of the REN and RES fuses are now discontinued.

Suggested replacements are:

- REN; Use 250V FRN-R Class RK5 fuses (see data sheet No. 1020)
- RES; Use 600V FRS-R Class RK5 fuses (see data sheet No. 1018)

Replacement fuse links for all 1-600A ratings (250V LKN and 600V LKS) will continue to be available to service the installed base of REN and RES fuses.

Specifications:

Ratings

- · Volts
 - · REN 250Vac
- · RES 600Vac
- Amps
 - · 1-60A
- · Interrupting Rating
 - 10kA RMS Sym.

250V REN Catalog numbers (1-60 Amps) REN-1 REN-6 REN-15 REN-40 REN-2 REN-7 REN-20 REN-45 REN-3 REN-8 REN-25 REN-50 REN-4 REN-10 REN-30 REN-60 REN-5 REN-12 REN-35

250V REN Carton quantity and weight

Catalog	Carton	Weight
number	qty	lbs (kg)*
REN 1-30	10	0.55 (0.249)
REN 35-60	10	1.40 (0.634)

^{*}Weight per carton.

600V RES Catalog numbers (1-60 Amps)				
RES	S-1	RES-6	RES-20	RES-45
RES	S-2	RES-8	RES-25	RES-50
RES	S-3	RES-10	RES-30	RES-60
RES	S-4	RES-12	RES-35	=
RES	S-5	RES-15	RES-40	-

600V RES Carton quantity and weight

Catalog	Carton	Weight
number	qty	lbs (kg)*
RES 1-30	10	0.18 (0.082)
RES 35-60	10	0.36 (0.163)

^{*}Weight per carton.

Features

 These fuses are generally sized at the amp rating of non-inductive circuits and 300% for motor circuits.

Recommended fuse blocks


Part number	Description
HM250	250V, 30 and 60A 1-, 2- and 3-pole open fuse blocks
HM600	600V, 30 and 60A 1-, 2 and 3-pole open fuse blocks

For details, see data sheet No. 10289.




Dimensions - in

250V REN



600V RES



Replacement 250V REN and 600V RES fuse links

250V LKN Fuse link catalog numbers (amps)

LKN-1	LKN-10	LKN-60	LKN-200
LKN-1-1/2	LKN-12	LKN-70	LKN-225
LKN-2	LKN-15	LKN-75	LKN-250
LKN-3	LKN-20	LKN-80	LKN-300
LKN-4	LKN-25	LKN-90	LKN-350
LKN-5	LKN-30	LKN-100	LKN-400
LKN-6	LKN-35	LKN-110	LKN-450
LKN-7	LKN-40	LKN-125	LKN-500
LKN-8	LKN-45	LKN-150	LKN-600
LKN-9	LKN-50	LKN-175	

250V LKN Fuse link carton quantity and weight

Catalog	Carton	Weight
number	qty	lbs (kg)*
LKN 1-30	20	0.05 (0.02)
LKN 35-60	20	0.20 (0.09)
LKN 70-100	10	0.20 (0.09)
LKN 110-200	5	0.25 (0.11)
LKN 225-400	5	0.55 (0.25)
LKN 450-600	2	0.32 (0.15)

^{*}Weight per carton.

600V LKS Fuse link catalog numbers (amps)

LKS-1	LKS-10	LKS-50	LKS-200	
LKS-2	LKS-12	LKS-60	LKS-225	
LKS-2-1/2	LKS-15	LKS-70	LKS-250	
LKS-3	LKS-17-1/2	LKS-80	LKS-300	
LKS-4	LKS-20	LKS-90	LKS-350	
LKS-5	LKS-25	LKS-100	LKS-400	
LKS-6	LKS-30	LKS-110	LKS-450	
LKS-7	LKS-35	LKS-125	LKS-500	
LKS-8	LKS-40	LKS-150	LKS-600	
LKS-9	LKS-45	LKS-175	_	


600V RES Fuse link carton quantity and weight

Catalog	Carton	Weight
number	qty	lbs (kg)*
LKS 1–30	20	0.05 (0.02)
LKS 35-60	20	0.02 (0.09)
LKS 65-100	10	0.02 (0.09)
LKS 110-200	5	0.25 (0.11)
LKS 225-400	5	0.55 (0.25)
LKS 450-600	2	0.32 (0.15)


^{*}Weight per carton.

Time-current characteristic curves – average melt

250V REN (LKN Fuse links)

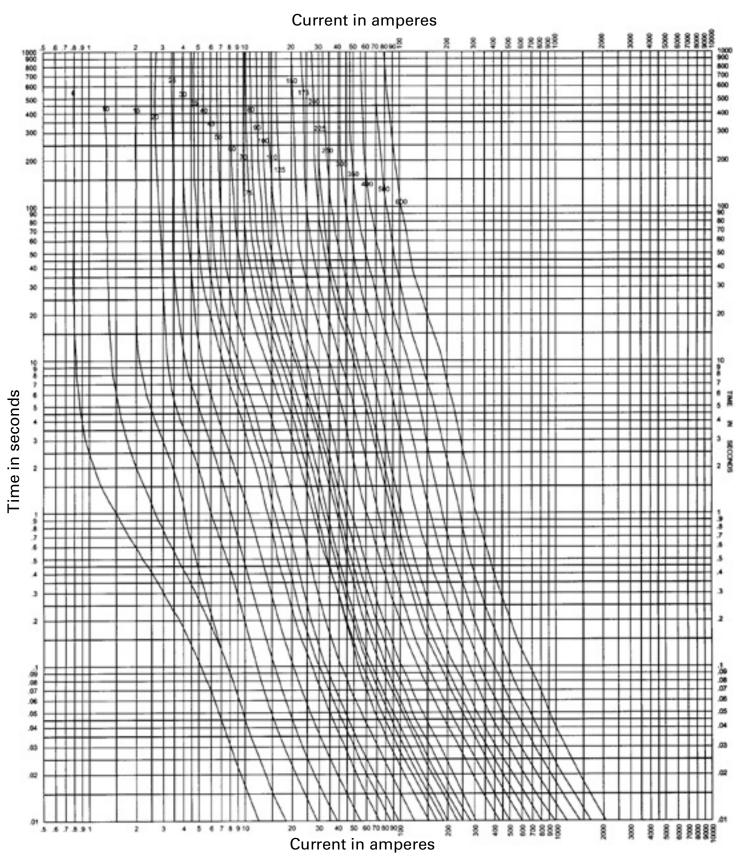

Time-current characteristic curves – average melt 600V RES (LKS Fuse links)

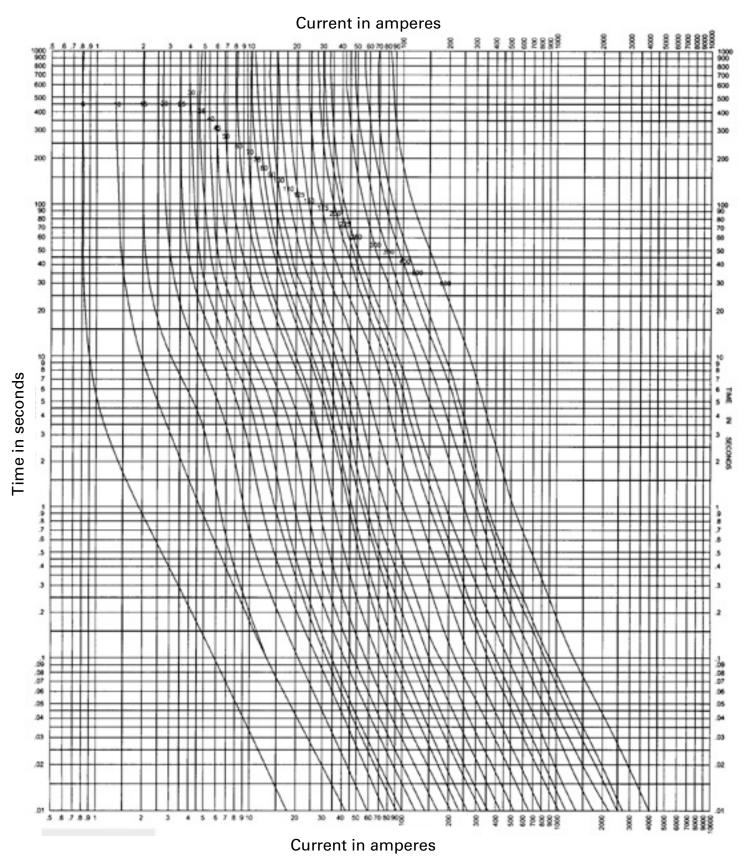

REN (250V) and RES (600V) Renewable Class H fuses

The only controlled copy of this data sheet is the electronic read-only version located on the Eaton network drive. All other copies of this document are by definition uncontrolled. This bulletin is intended to clearly present comprehensive product data and provide technical information that will help the end user with design applications. Eaton reserves the right, without notice, to change design or construction of any products and to discontinue or limit distribution of any products. Eaton also reserves the right to change or update, without notice, any technical information contained in this bulletin. Once a product has been selected, it should be tested by the user in all possible applications.

Eaton

1000 Eaton Boulevard Cleveland, OH 44122 United States Eaton.com

Bussmann Division 114 Old State Road Ellisville, MO 63021 United States Eaton.com/bussmannseries

© 2015 Eaton All Rights Reserved Printed in USA Publication No. 1028 – BU-SB14109 December 2015 Eaton and Bussmann are valuable trademarks of Eaton in the US and other countries. You are not permitted to use the Eaton trademarks without prior written consent of Eaton.

For Eaton's Bussmann series product information, call 1-855-287-7626 or visit: Eaton.com/bussmannseries

Follow us on social media to get the latest product and support information.











X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for Specialty Fuses category:

Click to view products by Eaton manufacturer:

Other Similar products are found below:

63NZ02GL 714125 722134 80NH00GR-6 FWH-200A FWP-32A14F FWP-50 HBM-25 12LCT 12TDLSJ63 REN-3 15.5CAVH2E ECF-2 ECF-4 ECF-6 170M0213 170M1314 170M1369-D 170M3809D BK/F02A-2AS BK/F02B-1A N-2-1/2 N-3-2/10 NITD2 20D16 20D16SC 20D27FB KAA-3 KAB-2 KAB-30 KAJ-60 KAW-3 2D16 LKN-125B 16D27SB 170M1564D 170M2616 170M2668 170M4161 170M4241 170M4699 ESD63 ABS-25 ABS-30 ABS-8 ACF-15 ACF-30 ACO-30 SSD10 200NH1M