

Rejection base plug fuses – dual-element, time-delay 125 volt, up to 30 amps



Catalog symbol:

- S (amps)
- BP/S (amps)

Description:

Bussmann® series dual-element, time-delay rejection base plug fuse.

Specifications:

Ratings

- Volts 125 Vac or less
- Amps 1/4 to 30 A
- Interrupting rating 10 kA RMS Sym

Agency Information

- UL[®] Listed (up to 6-1/4 A), Std. 248-11, Guide JFHR, File E56412, (7 to 30 A) Guide JEFV, File E12112
- CSA® Certified, Class 1423-01, File 53787
- CE

Edison base adaptors

Adaptor	Accepts fuses	Adaptor	Accepts fuses
SA-1	S-1 or smaller	SA-5	S-5 to S-3-1/2
SA-1-1/4	S-1-1/4 or smaller	SA-6-1/4	S-6-1/4 to S-3-1/2
SA-1-6/10	S-1-6/10 or smaller	SA-8	S-8 to S-7
SA-2	S-2 or S-1-8/10	SA-10	S-10 to S-7
SA-2-1/2	S-2-1/2 to S-1-8/10	SA-15	S-15 to S-7
SA-3-2/10	S-3-2/10 to S-1-8/10	SA-20	S-20
SA-4	S-4 to S-3-1/2	SA-30	S-30 to S-20

Catalog numbers (amps)					
S - 1/4	S - 2	S - 6-1/4			
S - 3/10	S - 2-1/4	S - 7			
S - 4/10	S - 2-1/2	S - 8			
S - 1/2	S - 2-8/10	S - 9			
S - 6/10	S - 3	S - 10			
S - 8/10	S - 3-2/10	S - 12			
S - 1	S - 3-1/2	S - 14			
S - 1-1/8	S - 4	S - 15			
S - 1-1/4	S - 4-1/2	S - 20			
S - 1-4/10	S - 5	S - 25			
S - 1-6/10	S - 5-6/10	S - 30			
S - 1-8/10	S - 6	_			


Package quantity and weight

	Quantity		Weight	
Amp ratings	Per box	Per card	Per box	Per 5 cards
1/4 to 14 A	4	1	0.24	0.43
15 to 30 A	4	2	0.24	0.68



Features:

- · Heavy duty, dual-element, time-delay rejection base fuse
- Use to protect critical motor circuits or motors that cycle on/ off frequently
- Features non-interchangeable body
- An industrial/commerical grade product with dual-element construction
- · These fuses thread into SA adaptors
- Industrial strength, featuring exclusive dual-element construction
- This spring loaded design provides superior short circuit and overload protection
- More time-delay than the medium duty Type SL fuses in order to better protect industrial motors and critical residential circuits

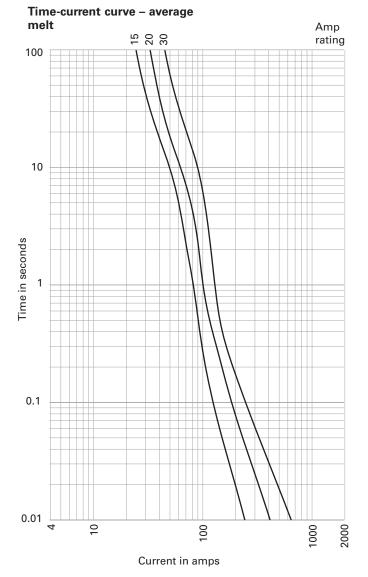

The only controlled copy of this Data Sheet is the electronic read-only version located on the Eaton Network Drive. All other copies of this document are by definition uncontrolled. This bulletin is intended to clearly present comprehensive product data and provide technical information that will help the end user with design applications. Eaton reserves the right, without notice, to change design or construction of any products and to discontinue or limit distribution of any products. Eaton also reserves the right to change or update, without notice, any technical information contained in this bulletin. Once a product has been selected, it should be tested by the user in all possible applications.

Eaton 1000 Eaton Boulevard Cleveland, OH 44122 United States Eaton.com

Bussmann Division 114 Old State Road Ellisville, MO 63021 United States Eaton.com/bussmannseries

© 2016 Eaton All Rights Reserved Printed in USA Publication No. 1032 – SB02374 May 2016 Eaton and Bussmann are valuable trademarks of Eaton in the US and other countries. You are not permitted to use the Eaton trademarks without prior written consent of Eaton.

CSA is a registered trademark of the Canadian Standards Group. UL is a registered trademark of the Underwriters Laboratories. Inc. For Eaton's Bussmann series product information, call 1-855-287-7626 or visit: Eaton.com/bussmannseries

Follow us on social media to get the latest product and support information.













X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for Specialty Fuses category:

Click to view products by Eaton manufacturer:

Other Similar products are found below:

ECF-1 ECF-1/2 ECF-2 ECF-3 ECF-4 170M1418 N-2-1/2 N-3-2/10 S-2 2D16 170M1564D 170M4241 ABS-25 ABS-30 ABS-8 FWP-25A14FI FWP-80A22FI 30CIF06 TJD TPL-BL KAB-25 KLC40 WKV 10D27 NITD25 04450080FX850 NITD16 ECF-5 TDC180-10 TPM-25 170M3509 DEO200 004117001 45ET 170M5810D 10H07C SDL-2 CC12M10A TDC600-2-R CBW57-ES-7A-5H CBW57-HB-15A-P CBW57-PS-15A-5X CBW58-HL4-30A-5C CBW58-HS-15A-5C CBW58-HS-20A-5C 0AALBK300-BA 170M8211 STD2 STD4 4D27FB