
### Technical Data 2101

Effective June 2017 Supersedes December 2007

# S-8000 1/4" x 1 1/4" Fuse blocks



BUSSMANN SERIES



#### **Product features**

- For 1/4" x 11/4" (6.3 x 32mm) fuses
- Bolt-in and snap-in mounting available
- Tight cluster mounting
- All types of terminal configurations
- Clips made of bright tin-plated spring-bronze
- Anti-rotational pin provided
- Flame retardant thermoplastic meets UL 94V0

#### Agency information

- UL Recognized: E14853
- CSA Certified: 47235
- •

#### **Environmental data**

- Relative Temperature Index (RTI)
  - o Bolt-in 130°C
  - o Snap-in 110°C

#### **Ordering information**

• Specify packaging, product, and option code

#### Bolt-in Mounting Example: BK/S-8102-6-R

<u>BK/</u>	<u>S-8</u> ↓	1	<u>02</u>	<u>6</u>	-	<u>R</u> ↓
¥ 1	2			5		7
	~	5	- T	2		

Snap-in Mounting Example: BK/S-8001-1-SNP-R

$\begin{array}{cccccccccccccccccccccccccccccccccccc$	$ \frac{\text{SNP}}{\Psi} - \frac{R}{\Psi} $ 6 7		
1. Packaging Code: 2. Series Number:	BK/ 5-8		
3. Type Terminal:	0 = Solder		
	$1 = \frac{3}{16}$ " quick connect		
	$2 = \frac{1}{4}$ quick connect		
3 = Screw			
4. Terminal Angle:	01 = Straight (0°)		
	02 = 40° Angle		
03 = Side*			
5. Number of Poles:	(1 – 12)		
	1X = One pole, No Mounting Stud		
6. Mounting Style:	SNP = Snap-in Mounting*		
7. RoHS Compliant Version	-R		

\*Available only in single pole

	Packaging Code		
Catalog Number Prefix Description			
Blank	Varies with number of poles. Contact customer service.		
BK/ Varies with number of poles. Contact customer service.			




Specifications					
Series Volts UL Max Amps			CSA Max. Amps		
S-8000	300Vac/dc	30	21		
S-8100	300Vac/dc	20	13		
S-8200	300Vac/dc	30	16		
S-8300	300Vac/dc	30	25		

### Dimensions - mm/in.


Powerina Business Worldwide

#### S-8000 Single-Pole Snap-In Mounting Series

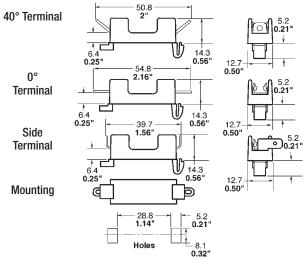


Component		Material	
	Clip	Spring-Bronze, Bright Tin-Plate	
Body		Thermoplastic	

#### Multiple Pole



Mounting Dimensions				
No. of	Inches		Millimeters	
Poles	Α	В	Α	В
1	-	-	_	-
2	<b>1</b> <sup>1</sup> /8"	<sup>5</sup> /8"	28.6	15.9
3	<b>1</b> <sup>3</sup> /4"	<b>1</b> <sup>1</sup> /4"	44.4	31.8
4	2 <sup>3</sup> /8"	1 <sup>7</sup> /8"	60.3	47.6
5	3"	<b>2</b> <sup>1</sup> /2 <sup>11</sup>	76.2	63.5
6	<b>3</b> ⁵/ଃ''	<b>3</b> <sup>1</sup> /8"	92.1	79.4
7	<b>4</b> <sup>1</sup> / <sub>4</sub> "	<b>3</b> <sup>3</sup> /4"	108.0	95.2
8	<b>4</b> <sup>7</sup> /8"	<b>4</b> <sup>3</sup> /8 <sup>11</sup>	123.8	111.1
9	5 <sup>1</sup> /2"	5"	139.7	127.0
10	6 <sup>1</sup> /8"	<b>5</b> <sup>5</sup> /8''	155.6	142.9
11	6 <sup>3</sup> /4"	6 <sup>1</sup> /4"	171.4	158.8
12	<b>7</b> ³/8"	<b>6</b> <sup>7</sup> /8 <sup>11</sup>	187.3	174.6

#### Dimensions - mm/in. S-8000 Single-Pole Bolt-In Mounting Series

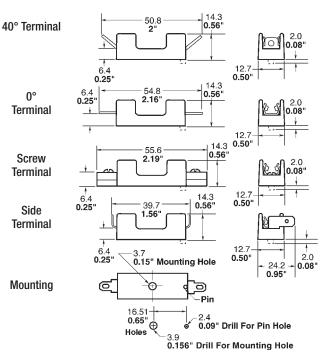

Life Support Policy: Eaton does not authorize the use of any of its products for use in life support devices or systems without the express written approval of an officer of the Company. Life support systems are devices which support or sustain life, and whose failure to perform, when properly used in accordance with instructions for use provided in the labeling, can be reasonably expected to result in significant injury to the user.

Eaton reserves the right, without notice, to change design or construction of any products and to discontinue or limit distribution of any products. Eaton also reserves the right to change or update, without notice, any technical information contained in this bulletin.

Eaton Electronics Division 1000 Eaton Boulevard Cleveland, OH 44122 United States www.eaton.com/electronics

© 2017 Eaton All Rights Reserved Printed in USA Publication No. 2101 BU-SB07222 June 2017

Eaton is a registered trademark.

All other trademarks are property of their respective owners.

## **X-ON Electronics**

Largest Supplier of Electrical and Electronic Components

Click to view similar products for Fuse Holder category:

Click to view products by Eaton manufacturer:

Other Similar products are found below :

570-290-741P40 570-290-751P40 0031.1351.01 020417G 020418E 80910030 8601.2020 9-3557-GP REV A 15600-08-10 BK1-HTC-45M BK/FHN19G BK/HJM-HH BK/HKP-CCHH BK/HKP-E-CC BK/HKP-E-HH BK/HKP-EH-HH BK/HKP-U-HH BK/HTJ-LES-FUSE HMG-241 2086-1 2193 RTMF-SC 2602 2650 FHN31G1 G4PB8 2660 2799 CQ-209V 345621A 3794 4202 4408 4413 4423 4482 4532 4537 TSD1404-12 BK/FHN31G1 BK/HKP-H-CC BK/HKP-JQ-BB BK/HKP-JQW-BB BK/HKP-N-HH BK/HKP-S-CC BK/HKP-W-BBHH BP/HHS BPHHU 55900008011 C1933