Effective May 2016 Supersedes August 2002

Rejection base plug fuses – dual-element, time-delay 125 volt, up to 30 amps



Catalog symbol:

- S (amps)
- BP/S (amps)

Description:

Bussmann[®] series dual-element, time-delay rejection base plug fuse.

Specifications:

Ratings


- Volts 125 Vac or less
- Amps 1/4 to 30 A
- Interrupting rating 10 kA RMS Sym

Agency Information

- UL[®] Listed (up to 6-1/4 A), Std. 248-11, Guide JFHR, File E56412, (7 to 30 A) Guide JEFV, File E12112
- CSA[®] Certified, Class 1423-01, File 53787
- CE

Edison base adaptors

Adaptor	Accepts fuses	Adaptor	Accepts fuses
SA-1	S-1 or smaller	SA-5	S-5 to S-3-1/2
SA-1-1/4	S-1-1/4 or smaller	SA-6-1/4	S-6-1/4 to S-3-1/2
SA-1-6/10	S-1-6/10 or smaller	SA-8	S-8 to S-7
SA-2	S-2 or S-1-8/10	SA-10	S-10 to S-7
SA-2-1/2	S-2-1/2 to S-1-8/10	SA-15	S-15 to S-7
SA-3-2/10	S-3-2/10 to S-1-8/10	SA-20	S-20
SA-4	S-4 to S-3-1/2	SA-30	S-30 to S-20



BUSSMANN

Package quantity and weight


	Quan	Quantity		Weight	
Amp ratings	Per box	Per card	Per box	Per 5 cards	
1/4 to 14 A	4	1	0.24	0.43	
15 to 30 A	4	2	0.24	0.68	



Features:

- · Heavy duty, dual-element, time-delay rejection base fuse
- Use to protect critical motor circuits or motors that cycle on/ off frequently
- Features non-interchangeable body
- An industrial/commerical grade product with dual-element construction
- These fuses thread into SA adaptors
- Industrial strength, featuring exclusive dual-element construction
- This spring loaded design provides superior short circuit and overload protection
- More time-delay than the medium duty Type SL fuses in order to better protect industrial motors and critical residential circuits

Time-current curve – average melt

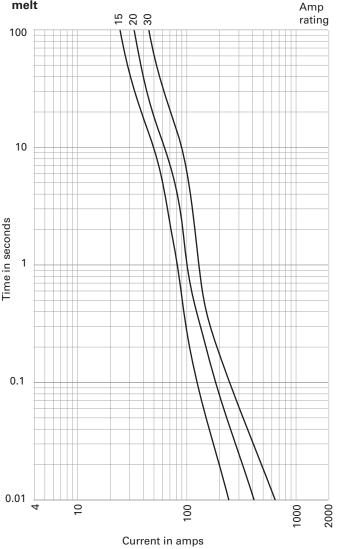

The only controlled copy of this Data Sheet is the electronic read-only version located on the Eaton Network Drive. All other copies of this document are by definition uncontrolled. This bulletin is intended to clearly present comprehensive product data and provide technical information that will help the end user with design applications. Eaton reserves the right, without notice, to change design or construction of any products and to discontinue or limit distribution of any products. Eaton also reserves the right to change or update, without notice, any technical information contained in this bulletin. Once a product has been selected, it should be tested by the user in all possible applications.

Eaton 1000 Eaton Boulevard Cleveland, OH 44122 United States Eaton.com

Bussmann Division 114 Old State Road Ellisville, MO 63021 United States Eaton.com/bussmannseries

Powerina Business Worldwide

© 2016 Eaton All Rights Reserved Printed in USA Publication No. 1032 – SB02374 May 2016 Eaton and Bussmann are valuable trademarks of Eaton in the US and other countries. You are not permitted to use the Eaton trademarks without prior written consent of Eaton.

CSA is a registered trademark of the Canadian Standards Group. UL is a registered trademark of the Underwriters Laboratories, Inc. For Eaton's Bussmann series product information, call **1-855-287-7626** or visit: **Eaton.com/bussmannseries**

Follow us on social media to get the latest product and support information.



X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for Eaton manufacturer:

Other Similar products are found below :

 BK1-S506-6-3-R
 BK-MDL-3-R
 BK/ABC-1
 BK/MDA-15
 GMA-5A
 GMA250MA
 89096-015
 8946K153
 8961K155
 M22-D-R-GB0/K11

 M22-L-R/R
 6422
 6580
 CTX20-16-52LP-R
 CWL530FI
 CXM/CO/GP/R/BB
 6HD36
 714125
 MBO-2
 7314K36
 7321K2
 F02A-1-1/2A

 F02A-1-1/2AS
 F02A-1AS
 F02A-2AS
 F02A-3/4A
 F03A250V12A
 F03B125V4A
 MCR-4
 MDA-2-8/10-R
 MDA-30A
 MDA-V-1/16

 F60C500V10AS
 F60C500V15AS
 7563K84
 7634K36
 MDQ-3/16
 MDQ-7/10
 MDQ-V-1/10
 MDQ-V-1/14
 MDQ-V-1/16
 MDQ-V-1/2

 MDQ-V-1/4
 MDQ-V-3/16
 MDQ-V-6/10
 MDQ-V-6-1/4
 MDV-1-1/2
 MDV-3/8
 MDV-4