

SD3118

Low profile power inductors



Description

- Low profile shielded drum core
- Compact footprint utilizes less board space
- Inductance Range from 1.0 μ H to 1,000 μ H
- Current range from 0.083 to 2.94 amps
- 3.2 x 3.2mm footprint surface mount package in a 1.8mm height
- Ferrite core material
- Halogen free, lead free, RoHS compliant

Applications

- Mobile/smart phones
- Tablets/e-readers
- Media players
- Digital cameras
- Small LED driver and LCD displays
- Handheld/mobile equipment

Environmental Data

- Storage temperature range (Component): -40°C to +125°C
- Operating temperature range: -40°C to +125°C (ambient + self-temperature rise)
- Solder reflow temperature: J-STD-020D compliant



Product Specifications

Part Number ⁶	OCL ¹ (μ H)	Part marking designator	I_{rms}^2 (amps)	I_{sat}^3 (amps)	DCR (Ω) typical @ +20°C	K-factor ⁴
SD3118-1R0-R	1.04 \pm 30%	A	2.01	3.07	0.041	84
SD3118-1R5-R	1.44 \pm 30%	B	1.81	2.42	0.051	68
SD3118-2R2-R	2.12 \pm 30%	C	1.50	2.00	0.074	57
SD3118-3R3-R	3.36 \pm 30%	D	1.22	1.59	0.11	56
SD3118-4R7-R	4.90 \pm 30%	E	1.02	1.31	0.16	39
SD3118-6R8-R	6.72 \pm 30%	F	0.85	1.12	0.23	32
SD3118- 8R2-R	8.10 \pm 30%	G	0.81	1.02	0.26	29
SD3118- 100-R	10.4 \pm 30%	H	0.75	0.90	0.30	26
SD3118-150-R	14.9 \pm 30%	I	0.62	0.75	0.44	21
SD3118-220-R	22.5 \pm 30%	J	0.50	0.61	0.68	18
SD3118-330-R	33.1 \pm 30%	K	0.41	0.51	0.99	14
SD3118-470-R	47.5 \pm 30%	L	0.37	0.42	1.2	12
SD3118-221-R	222 \pm 20%	M	0.182	0.177	4.8	6
SD3118-331-R	330 \pm 20%	N	0.146	0.145	7.4	5
SD3118-471-R	470 \pm 20%	O	0.130	0.122	9.2	4
SD3118-681-R	680 \pm 20%	P	0.107	0.101	14	3
SD3118-102-R	999 \pm 20%	Q	0.087	0.083	21	3

1. Open Circuit Inductance (OCL) Test Parameters: 100kHz, 0.1Vrms, 0.0Aac, @ +25°C

2. I_{rms} : DC current for an approximate temperature rise of 40°C without core loss. Derating is necessary for AC currents. PCB layout, trace thickness and width, air-flow, and proximity of other heat generating components will affect the temperature rise. It is recommended that the temperature of the part not exceed 125°C under worst case operating conditions verified in the end application.

3. I_{sat} : Peak current for approximately 30% rolloff @ +20°C

4. K-factor: Used to determine B_{pp} for core loss (see graph). $B_{p-p} = K * L * \Delta I$. B_{p-p} : (mTesla), K: (K-factor from table), L: (Inductance in μ H), ΔI (Peak to peak ripple current in Amps).


5. Part Number Definition: SD3118-xxx-R

SD3118 = Product code and size


xxx= Inductance value in μ H, R= decimal point, if no R is present then last character equals number of zeros

-R suffix = RoHS compliant


Dimensions (mm)

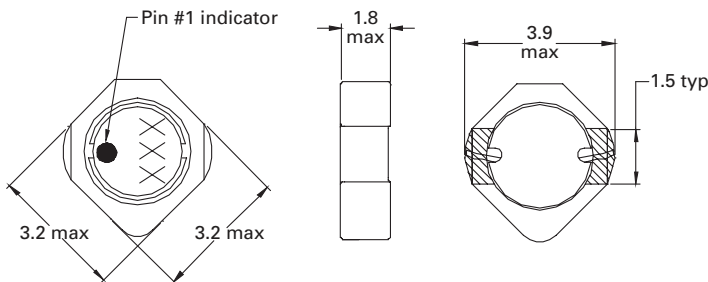

Recommended Pad Layout



Schematic




Part marking: dot for pin 1 indicator (orientation purposes only)
xxx = 3 digit marking (first digit indicates inductance value per letter in Part marking designator, second digit is bi-weekly date code, third digit is last digit of year produced)


All soldering surfaces to be coplanar within 0.10 millimeters
PCB tolerances are \pm 0.1 millimeters unless stated otherwise
Do not route traces or vias underneath the inductor

Packaging information (mm)


Supplied in tape and reel packaging, 4,100 parts per 13" diameter reel

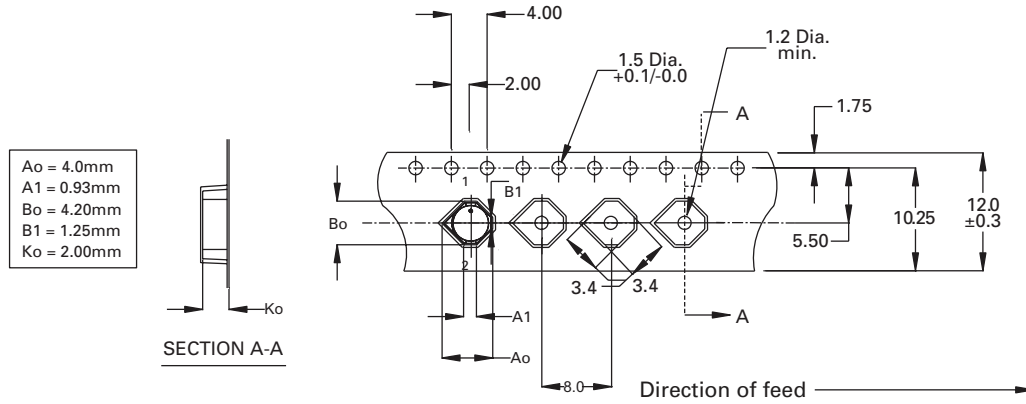


Temperature rise vs. total loss

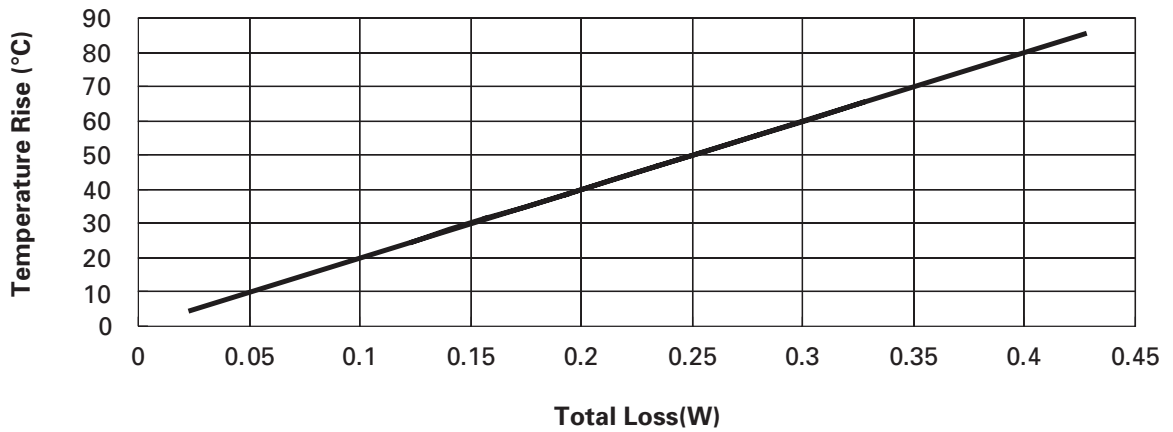

Core loss vs. B_{p-p}

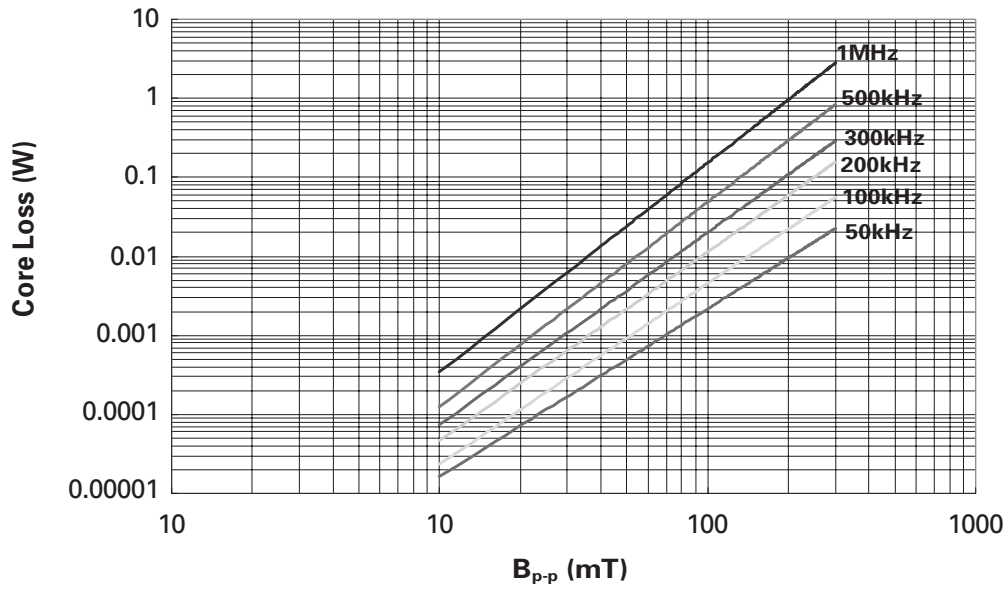

Inductance characteristics

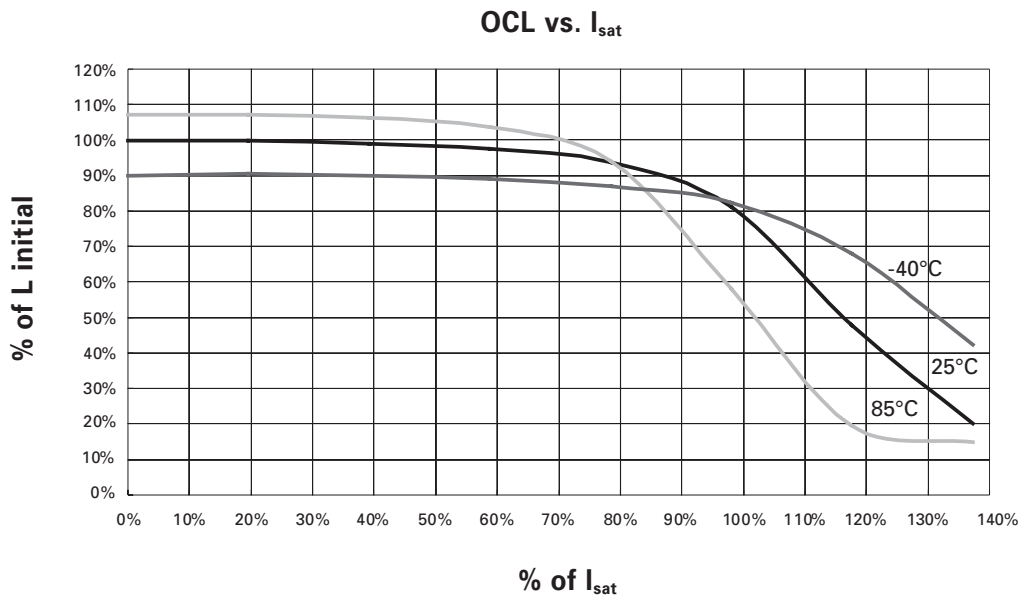

Solder reflow profile

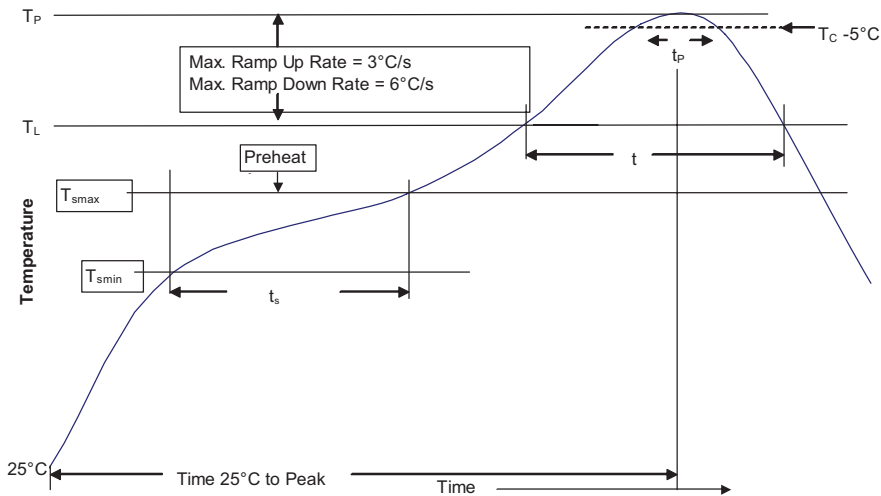


Table 1 - Standard SnPb Solder (T_c)

Package Thickness	Volume mm ³ <350	Volume mm ³ ≥350
<2.5mm)	235°C	220°C
≥2.5mm	220°C	220°C

Table 2 - Lead (Pb) Free Solder (T_c)

Package Thickness	Volume mm ³ <350	Volume mm ³ 350 - 2000	Volume mm ³ >2000
<1.6mm	260°C	260°C	260°C
1.6 - 2.5mm	260°C	250°C	245°C
>2.5mm	250°C	245°C	245°C

Reference JEDEC J-STD-020D

Profile Feature	Standard SnPb Solder	Lead (Pb) Free Solder
Preheat and Soak		
• Temperature min. (T _{smin})	100°C	150°C
• Temperature max. (T _{smax})	150°C	200°C
• Time (T _{smin} to T _{smax}) (t _s)	60-120 Seconds	60-120 Seconds
Average ramp up rate T _{smax} to T _p	3°C/ Second Max.	3°C/ Second Max.
Liquidous temperature (T _L)	183°C	217°C
Time at liquidous (t _L)	60-150 Seconds	60-150 Seconds
Peak package body temperature (T _p)*	Table 1	Table 2
Time (t _p)** within 5 °C of the specified classification temperature (T _c)	20 Seconds**	30 Seconds**
Average ramp-down rate (T _p to T _{smax})	6°C/ Second Max.	6°C/ Second Max.
Time 25°C to Peak Temperature	6 Minutes Max.	8 Minutes Max.

* Tolerance for peak profile temperature (T_p) is defined as a supplier minimum and a user maximum.
 ** Tolerance for time at peak profile temperature (t_p) is defined as a supplier minimum and a user maximum.

Life Support Policy: Eaton does not authorize the use of any of its products for use in life support devices or systems without the express written approval of an officer of the Company. Life support systems are devices which support or sustain life, and whose failure to perform, when properly used in accordance with instructions for use provided in the labeling, can be reasonably expected to result in significant injury to the user.

Eaton reserves the right, without notice, to change design or construction of any products and to discontinue or limit distribution of any products. Eaton also reserves the right to change or update, without notice, any technical information contained in this bulletin.

Eaton
Electronics Division
 1000 Eaton Boulevard
 Cleveland, OH 44122
 United States
 www.eaton.com/elx

© 2015 Eaton
 All Rights Reserved
 Printed in USA
 Publication No. 4084 BU-MC15028
 September 2015

Eaton is a registered trademark.
 All other trademarks are property of their respective owners.

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Fixed Inductors](#) category:

Click to view products by [Eaton](#) manufacturer:

Other Similar products are found below :

[CR43NP-680KC](#) [CR54NP-820KC](#) [CR54NP-8R5MC](#) [CTX32CT-100](#) [70F224AI](#) [MGDQ4-00004-P](#) [MHL1ECTTP18NJ](#) [MHL1JCTTD12NJ](#)
[PE-51506NL](#) [PE-53601NL](#) [PE-53602NL](#) [PE-53630NL](#) [PE-53824SNLT](#) [PE-92100NL](#) [PG0434.801NLT](#) [PG0936.113NLT](#) [9310-16](#) [PM06-2N7](#) [PM06-39NJ](#) [A01TK](#) [1206CS-471XJ](#) [HC2-2R2TR](#) [HC2LP-R47-R](#) [HC3-2R2-R](#) [1206CS-151XG](#) [RCH664NP-140L](#) [RCH664NP-4R7M](#)
[RCH8011NP-221L](#) [RCP1317NP-332L](#) [RCP1317NP-391L](#) [RCR1010NP-470M](#) [RCR110DNP-331L](#) [DH2280-4R7M](#) [DS1608C-106](#) [ASPI-4020HI-R10M-T](#) [B10TJ](#) [B82477P4333M](#) [B82498B3101J000](#) [B82498B3680J000](#) [ELJ-RE27NJF2](#) [1812CS-153XJ](#) [1812CS-183XJ](#) [1812CS-223XJ](#) [1812LS-104XJ](#) [1812LS-105XJ](#) [1812LS-124XJ](#) [1812LS-154XJ](#) [1812LS-223XJ](#) [1812LS-224XJ](#) [1812LS-563XJ](#)