


SMFE

200 W Transient voltage suppressor



Product features

- Low profile SOD-123FL package
- Excellent clamping capability
- 200 W peak pulse power capability at 10/1000 μ s waveform
- Typical I_R less than 1 μ A above 10 V
- Fast response time: typically less than 1.0 ps from 0 V to V_{BR} minimum
- High temperature reflow soldering: +260 °C /40 s at terminal
- Plastic package meets UL 94 V-0 flammability rating
- Meets moisture sensitivity level (MSL) level 1
- Terminal: Solder plated leads, solderable per J-STD-002
- For surface mounted applications in order to optimize board space


Applications

- Consumer electronics
- Telecommunications
- Computing and servers
- Appliances
- Industrial automation
- Mobile and wearables



Environmental compliance and general specifications



Ordering part number

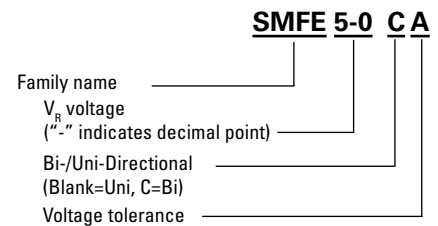

PIN configuration




Absolute maximum ratings

(+25 °C, RH=45%-75%, unless otherwise noted)

Parameter	Symbol	Value	Unit
Storage operating junction temperature range	T_{STG}/T_J	-55 to +150	°C
Peak pulse power dissipation on 10/1000 μ s waveform	P_{PP}	200	W
Maximum instantaneous forward voltage at 20 A for unidirectional	V_F	3.5	V
Typical thermal resistance junction to lead	$R_{\theta JL}$	100	°C/W
Typical thermal resistance junction to ambient	$R_{\theta JA}$	220	°C/W

Mechanical parameters, pad layout- mm

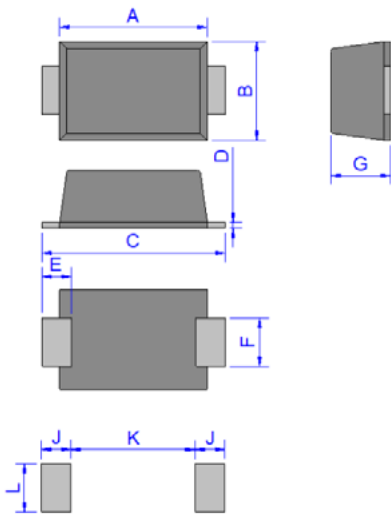

Dimension	Millimeters		Inches	
	Minimum	Maximum	Minimum	Maximum
A	2.60	3.00	0.102	0.118
B	1.60	2.00	0.063	0.079
C	3.45	3.95	0.136	0.156
D	0.10	0.25	0.004	0.01
E	0.3	0.9	0.012	0.035
F	0.80	1.20	0.031	0.047
G	0.95	1.35	0.037	0.053
J	1.30		0.051	
K		1.70		0.067
L	1.30		0.051	

Part marking




Cathode band (Uni-polar only)
Part marking: xxxx = Date code
yyyy- Refer to marking designator listed in Electrical Characteristics table

Packaging information (mm)

Drawing not to scale.

Supplied in tape and reel packaging, 3,000 parts per 7" diameter reel (EIA-481 compliant)

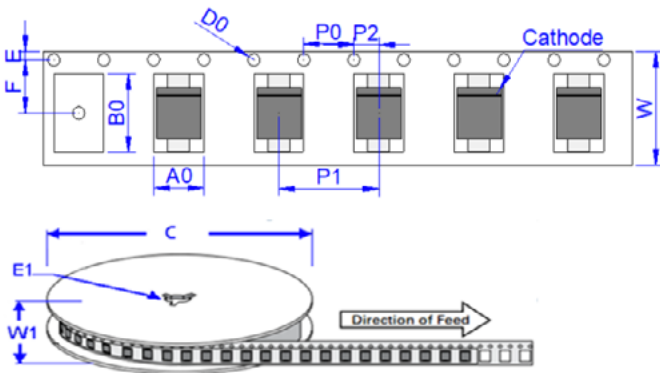

Dimension	Millimeters	Inches
A0	1.95 ± 0.3	0.077 ± 0.012
B0	3.95 ± 0.3	0.156 ± 0.012
C	178	7.0
D0	1.55 ± 0.1	0.061 ± 0.004
E	1.75 ± 0.2	0.069 ± 0.008
E1	13.3 ± 0.3	0.524 ± 0.012
F	3.50 ± 0.2	0.138 ± 0.008
P0	4.00 ± 0.2	0.157 ± 0.008
P1	4.00 ± 0.2	0.157 ± 0.008
P2	2.00 ± 0.2	0.079 ± 0.008
W	8.0 ± 0.2	0.315 ± 0.008
W1	11.5 ± 1.0	0.453 ± 0.039


SMFE
200 W Transient voltage suppressor

Electrical characteristics (+25 °C)


Part number		Marking		V _R (V)	I _R @V _R (μA)	V _{BR} @I _T min (V)	max (V)	I _T (mA)	V _C @I _{PP} max (V)	I _{PP} (A)
Uni-polar	Bi-polar	Uni	Bi							
SMFE5-0A	SMFE5-0CA	KE	5C	5	100	6.4	7	10	9.2	21.7
SMFE6-0A	SMFE6-0CA	KG	6C	6	100	6.67	7.37	10	10.3	19.4
SMFE6-5A	SMFE6-5CA	KK	6VC	6.5	30	7.22	7.98	10	11.2	17.9
SMFE7-0A	SMFE7-0CA	KM	7C	7	10	7.78	8.6	10	12	16.7
SMFE7-5A	SMFE7-5CA	KP	7VC	7.5	5	8.33	9.21	1	12.9	15.5
SMFE8-0A	SMFE8-0CA	KR	8C	8	2	8.89	9.83	1	13.6	14.7
SMFE8-5A	SMFE8-5CA	KT	8VC	8.5	2	9.44	10.4	1	14.4	13.8
SMFE9-0A	SMFE9-0CA	KV	9C	9	2	10	11.1	1	15.4	13
SMFE10A	SMFE10CA	KX	10C	10	1	11.1	12.3	1	17	11.8
SMFE11A	SMFE11CA	KZ	11C	11	1	12.2	13.5	1	18.2	11
SMFE12A	SMFE12CA	LE	12C	12	1	13.3	14.7	1	19.9	10.1
SMFE13A	SMFE13CA	LG	13C	13	1	14.4	15.9	1	21.5	9.3
SMFE14A	SMFE14CA	LK	14C	14	1	15.6	17.2	1	23.2	8.6
SMFE15A	SMFE15CA	LM	15C	15	1	16.7	18.5	1	24.4	8.2
SMFE16A	SMFE16CA	LP	16C	16	1	17.8	19.7	1	26	7.7
SMFE17A	SMFE17CA	LR	17C	17	1	18.9	20.9	1	27.6	7.2
SMFE18A	SMFE18CA	LT	18C	18	1	20	22.1	1	29.2	6.8
SMFE20A	SMFE20CA	LV	20C	20	1	22.2	24.5	1	32.4	6.2
SMFE22A	SMFE22CA	LX	22C	22	1	24.4	26.9	1	35.5	5.6
SMFE24A	SMFE24CA	LZ	24C	24	1	26.7	29.5	1	38.9	5.1
SMFE26A	SMFE26CA	ME	26C	26	1	28.9	31.9	1	42.1	4.8
SMFE28A	SMFE28CA	MG	28C	28	1	31.1	34.4	1	45.4	4.4
SMFE30A	SMFE30CA	MK	30C	30	1	33.3	36.8	1	48.4	4.1
SMFE33A	SMFE33CA	MM	33C	33	1	36.7	40.6	1	53.3	3.8
SMFE36A	SMFE36CA	MP	36C	36	1	40	44.2	1	58.1	3.4
SMFE40A	SMFE40CA	MR	40C	40	1	44.4	49.1	1	64.5	3.1
SMFE43A	SMFE43CA	MT	43C	43	1	47.8	52.8	1	69.4	2.8
SMFE45A	SMFE45CA	MV	45C	45	1	50	55.3	1	72.7	2.7
SMFE48A	SMFE48CA	MX	48C	48	1	53.3	58.9	1	77.4	2.6
SMFE51A	SMFE51CA	MZ	51C	51	1	56.7	62.7	1	82.4	2.4
SMFE54A	SMFE54CA	NE	54C	54	1	60	66.3	1	87.1	2.3
SMFE58A	SMFE58CA	NG	58C	58	1	64.4	71.2	1	93.6	2.1
SMFE60A	SMFE60CA	NK	60C	60	1	66.7	73.7	1	96.8	2
SMFE64A	SMFE64CA	NM	64C	64	1	71.1	78.6	1	103	1.9
SMFE70A	SMFE70CA	NP	70C	70	1	77.8	86	1	113	1.8
SMFE75A	SMFE75CA	NR	75C	75	1	83.3	92.1	1	121	1.7
SMFE78A	SMFE78CA	NV	78C	78	1	86.7	95.8	1	126	1.6
SMFE85A	SMFE85CA	NX	85C	85	1	94.4	104	1	137	1.5
SMFE90A	SMFE90CA	NZ	90C	90	1	100	111	1	146	1.4
SMFE100A	SMFE100CA	PE	100C	100	1	111	123	1	162	1.2
SMFE110A	SMFE110CA	PG	110C	110	1	122	135	1	177	1.1
SMFE120A	SMFE120CA	PK	120C	120	1	133	147	1	193	1
SMFE130A	SMFE130CA	PM	130C	130	1	144	159	1	209	0.9
SMFE150A	SMFE150CA	PR	150C	150	1	167	185	1	243	0.8
SMFE160A	SMFE160CA	PV	160C	160	1	178	197	1	259	0.8
SMFE170A	SMFE170CA	PX	170C	170	1	189	209	1	275	0.7
SMFE180A	SMFE180CA	PZ	180C	180	1	201	222	1	292	0.7
SMFE200A	SMFE200CA	QE	200C	200	1	224	247	1	324	0.6
SMFE220A	SMFE220CA	QR	220C	220	1	246	272	1	356	0.5

Ratings and V-I characteristic curves (+25 °C unless otherwise noted)

V- I curve characteristics (Uni-directional)

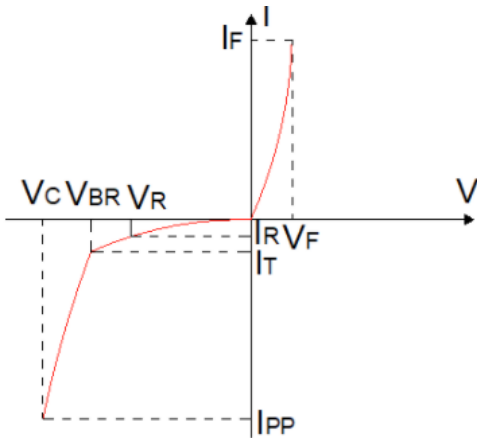

V- I curve characteristics (Bi-directional)

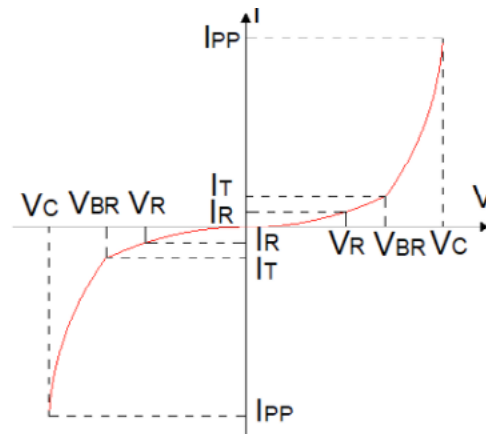

Surge waveform: 10/1000 μ s

V_R : Stand-off voltage – Maximum voltage that can be applied

V_{BR} : Breakdown voltage


V_C : Clamping voltage – Peak voltage measured across the suppressor at a specified I_{PP}

I_R : Reverse leakage current


I_T : Test current

V_F : Forward voltage drop for Uni-directional TVS diode

Pulse waveform

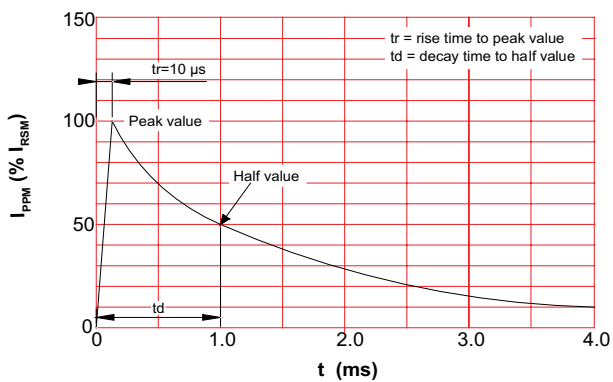

Pulse derating curve

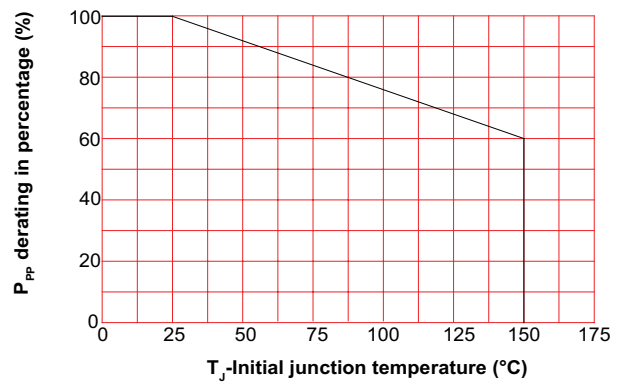

Solder reflow profile



Table 1 - Standard SnPb solder (T_C)

Package thickness	Volume mm^3 <350	Volume mm^3 \geq 350
<2.5 mm	235 °C	220 °C
\geq 2.5 mm	220 °C	220 °C

Table 2 - Lead (Pb) free solder (T_C)

Package thickness	Volume mm^3 <350	Volume mm^3 350 - 2000	Volume mm^3 >2000
<1.6 mm	260 °C	260 °C	260 °C
1.6 – 2.5 mm	260 °C	250 °C	245 °C
>2.5 mm	250 °C	245 °C	245 °C

Reference J-STD-020

Profile feature	Standard SnPb solder	Lead (Pb) free solder
Preheat and soak	<ul style="list-style-type: none"> Temperature min. (T_{smin}) Temperature max. (T_{smax}) Time (T_{smin} to T_{smax}) (t_s) 	<ul style="list-style-type: none"> 100 °C 150 °C 60-120 seconds
Ramp up rate T_L to T_p	3 °C/ second max.	3 °C/ second max.
Liquidous temperature (T_L) Time (t_L) maintained above T_L	<ul style="list-style-type: none"> 183 °C 60-150 seconds 	<ul style="list-style-type: none"> 217 °C 60-150 seconds
Peak package body temperature (T_p)*	Table 1	Table 2
Time (t_p)* within 5 °C of the specified classification temperature (T_C)	20 seconds*	40 seconds*
Ramp-down rate (T_p to T_L)	6 °C/ second max.	6 °C/ second max.
Time 25 °C to peak temperature	6 minutes max.	8 minutes max.

* Tolerance for peak profile temperature (T_p) is defined as a supplier minimum and a user maximum.

Life Support Policy: Eaton does not authorize the use of any of its products for use in life support devices or systems without the express written approval of an officer of the Company. Life support systems are devices which support or sustain life, and whose failure to perform, when properly used in accordance with instructions for use provided in the labeling, can be reasonably expected to result in significant injury to the user.

Eaton reserves the right, without notice, to change design or construction of any products and to discontinue or limit distribution of any products. Eaton also reserves the right to change or update, without notice, any technical information contained in this bulletin.

Eaton
Electronics Division
1000 Eaton Boulevard
Cleveland, OH 44122
United States
Eaton.com/electronics

© 2020 Eaton
All Rights Reserved
Printed in USA
Publication No. 11218 BU-MC20196
November 2020

Eaton is a registered trademark.
All other trademarks are property of their respective owners.

Follow us on social media to get the latest product and support information.



X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [ESD Suppressors / TVS Diodes](#) category:

Click to view products by [Eaton](#) manufacturer:

Other Similar products are found below :

[60KS200C](#) [D12V0H1U2WS-7](#) [D18V0L1B2LP-7B](#) [82356050220](#) [D5V0M5U6V-7](#) [NTE4902](#) [P4KE27CA](#) [P6KE11CA](#) [P6KE39CA-TP](#)
[P6KE8.2A](#) [SA110CA](#) [SA60CA](#) [SA64CA](#) [SMBJ12CATR](#) [SMBJ8.0A](#) [SMLJ30CA-TP](#) [ESD101-B1-02ELS E6327](#) [ESD112-B1-02EL E6327](#)
[ESD119B1W01005E6327XTSA1](#) [ESD5V0L1B02VH6327XTSA1](#) [ESD7451N2T5G](#) [19180-510](#) [CPDT-5V0USP-HF](#) [3.0SMCJ33CA-F](#)
[3.0SMCJ36A-F](#) [HSPC16701B02TP](#) [D3V3Q1B2DLP3-7](#) [D55V0M1B2WS-7](#) [DESD5V0U1BL-7B](#) [DRTR5V0U4SL-7](#) [SCM1293A-04SO](#)
[ESD200-B1-CSP0201 E6327](#) [ESD203-B1-02EL E6327](#) [SM12-7](#) [SMF8.0A-TP](#) [SMLJ45CA-TP](#) [CEN955 W/DATA](#) [82350120560](#)
[82356240030](#) [VESD12A1A-HD1-GS08](#) [CPDUR5V0R-HF](#) [CPDUR24V-HF](#) [CPDQC5V0U-HF](#) [CPDQC5V0USP-HF](#) [CPDQC5V0-HF](#)
[D1213A-01LP4-7B](#) [D1213A-02WL-7](#) [ESDLIN1524BJ-HQ](#) [5KP100A](#) [5KP15A](#)